

Type FCM-R

Fast Acting Surface Mount Fuse

Square Ceramic – Round Terminals



www.optifuse.com (619) 593-5050

Specifications:

Voltage: 125V AC/DC, 65VDC

Amperage: 100mA ~ 15A

Interrupt Ratings:

100A at 125V AC/DC (100mA-10A)

50A at 65V DC (12A-15A)

Environmental Specifications:

Operating Temperature:

-55° C to +125° C

Storage Temperature:

-55° C to +85° C

Resistance to soldering heat:

260°C±5°C, 30s±5s

Solderability:

MIL-STD-202, Method 208

Physical Specifications:

Materials:

Body: Ceramic

Terminations: Silver Plated Brass Caps


Packaging:

1,000 Fuses in taped and reel box

Electrical Characteristics:

100%	200%
4hr Min	5s Max (100mA ~ 10A)
	20s Max (12A ~ 15A)

Mechanical Dimensions: Inches [mm]

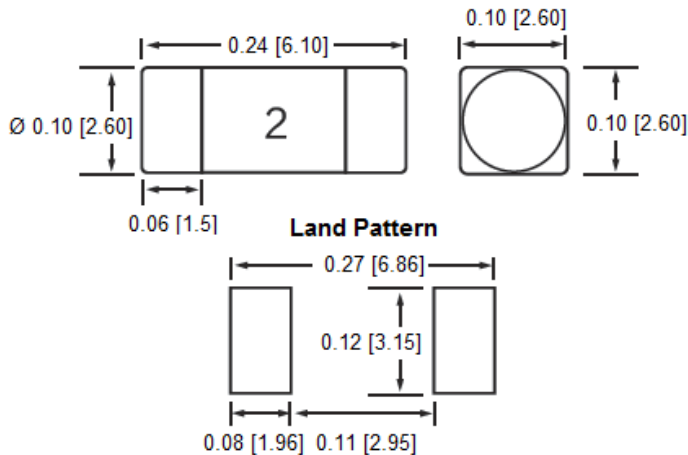

OptiFuse Part Number	Ampere Rating	Voltage
FCM-R-100mA	100mA	125V
FCM-R-125mA	125mA	
FCM-R-160mA	160mA	
FCM-R-200mA	200mA	
FCM-R-250mA	250mA	
FCM-R-315mA	315mA	
FCM-R-375mA	375mA	
FCM-R-400mA	400mA	
FCM-R-500mA	500mA	
FCM-R-630mA	630mA	
FCM-R-750mA	750mA	
FCM-R-800mA	800mA	
FCM-R-1A	1A	
FCM-R-1.25A	1.25A	
FCM-R-1.5A	1.5A	
FCM-R-1.6A	1.6A	
FCM-R-2A	2A	
FCM-R-2.5A	2.5A	
FCM-R-3A	3A	
FCM-R-3.15A	3.15A	
FCM-R-3.5A	3.5A	
FCM-R-4A	4A	
FCM-R-5A	5A	
FCM-R-6.3A	6.3A	
FCM-R-7A	7A	
FCM-R-8A	8A	
FCM-R-10A	10A	
FCM-R-12A	12A	65V
FCM-R-15A	15A	

Type FCM-R
Fast Acting Surface Mount Fuse
Square Ceramic – Round Terminals





www.optifuse.com

(619) 593-5050

Part Number FCM-R

TIME CURRENT CURVES

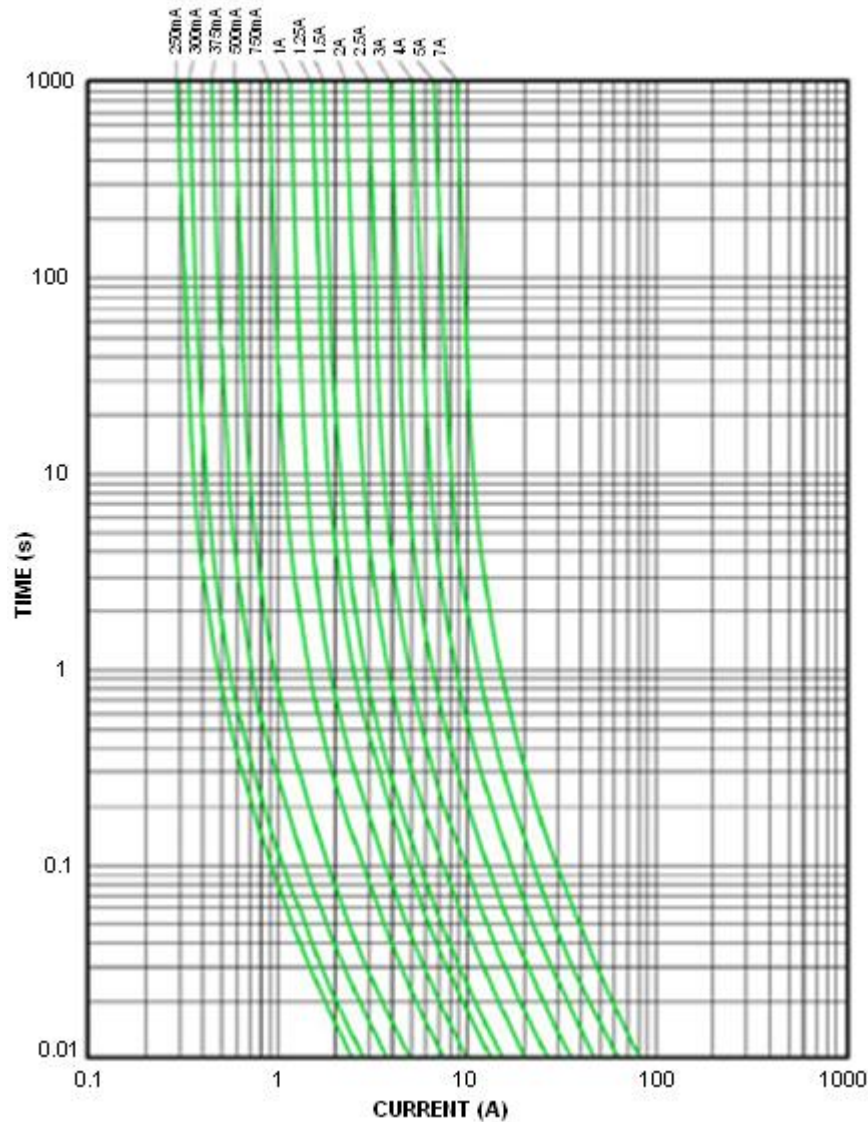

<p>Warning:</p> 	<ul style="list-style-type: none"> -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame. -Fuse device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated. -Avoid contact of Glass Fuse device with chemical solvent. Prolonged contact will damage the device performance.
--	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Optifuse](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [TR/3216LR-500MA](#) [CCP2B20TTE](#) [FCC16501ABTP](#)
[FHC16322ADTP](#) [0308.250UR](#) [0308.375UR](#) [0308.500UR](#) [FCC16202ABTP](#) [03081.25UR](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#)
[SKY87604-13](#) [3404.0110.22](#) [0603TD-4A](#) [R451003.L](#) [R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [3-103-127](#) [0154002.DRL](#) [0154008.DRL](#)
[0154.500DRL](#) [189140.1,25](#) [189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [0435.250KRHFS](#) [0468003.WR](#) [0494001.NRHF](#) [0494002.NRHF](#)
[0494003.NRHF](#) [049402.5NRHF](#) [049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#) [0494.500NRHF](#) [CF06V3T1R60](#) [CF06V3T2R50](#)
[06H1300D](#) [JFC0603-1200FS](#) [CF06V5TR50](#) [CP06V3T2R0](#) [06F-0200L1](#) [06F-0500L1](#)