

# Type FSC / FSC-P

## Fast Acting Glass Tube Fuse

### 5 x 20 mm



www.optifuse.com (619) 593-5050

#### Agency Standards and Listings:



See table to the right...

#### Interrupt Ratings:

35A at 250VAC 100mA~1A  
 100A at 250VAC 1.2A~3.5A  
 200A at 250VAC 4A~8A  
 100A at 250VAC 1A~15A PSE  
 100A at 250VAC 100mA~7A KC

#### Operating Temperature:

-55° C - +90° C

#### Packaging in Bulk:


FSC-1000 pcs ; FSC-P- 500 pcs per box

#### Electrical Characteristics

100%	135%	200%
Min	Max	Max
4h	1h	5s

Cartridge Part No.	Axial Lead Part No.	Ampere Rating	Voltage Rating (V)	Nominal Resistance Cold Ohms	UL cUL	PSE	KC
FSC-100mA	FSC-P-100mA	100mA	250V	-	•		•
FSC-125mA	FSC-P-125mA	125mA		-	•		•
FSC-150mA	FSC-P-150mA	150mA		-	•		•
FSC-200mA	FSC-P-200mA	200mA		0.02697	•		•
FSC-250mA	FSC-P-250mA	250mA		0.03371	•		•
FSC-300mA	FSC-P-300mA	300mA		0.04045	•		•
FSC-315mA	FSC-P-315mA	315mA		0.04247	•		•
FSC-350mA	FSC-P-350mA	350mA		0.04719	•		•
FSC-400mA	FSC-P-400mA	400mA		0.06145	•		•
FSC-500mA	FSC-P-500mA	500mA		0.07681	•		•
FSC-600mA	FSC-P-600mA	600mA		0.1224	•		•
FSC-630mA	FSC-P-630mA	630mA		0.1790	•		•
FSC-700mA	FSC-P-700mA	700mA		0.3040	•		•
FSC-750mA	FSC-P-750mA	750mA		0.3550	•		•
FSC-800mA	FSC-P-800mA	800mA		0.6167	•		•
FSC-1A	FSC-P-1A	1A		1.400	•	•	•
FSC-1.25A	FSC-P-1.25A	1.25A	1.540	•	•	•	
FSC-1.5A	FSC-P-1.5A	1.5A	2.076	•	•	•	
FSC-1.6A	FSC-P-1.6A	1.6A	3.450	•	•	•	
FSC-2A	FSC-P-2A	2A	5.149	•	•	•	
FSC-2.5A	FSC-P-2.5A	2.5A	5.761	•	•	•	
FSC-3A	FSC-P-3A	3A	9.722		•	•	
FSC-3.15A	FSC-P-3.15A	3.15A	9.835		•	•	
FSC-3.5A	FSC-P-3.5A	3.5A	13.52		•	•	
FSC-4A	FSC-P-4A	4A	15.80		•	•	
FSC-5A	FSC-P-5A	5A	29.11		•	•	
FSC-6A	FSC-P-6A	6A	47.42		•	•	
FSC-6.3A	FSC-P-6.3A	6.3A	59.24		•	•	
FSC-7A	FSC-P-7A	7A	73.10		•	•	
FSC-8A	FSC-P-8A	8A	100.0		•		
FSC-9A	FSC-P-9A	9A	153.9		•		
FSC-10A	FSC-P-10A	10A	171.0		•		
FSC-12A	FSC-P-12A	12A	306.2		•		
FSC-15A	FSC-P-15A	15A	382.8		•		
FSC-16A	FSC-P-16A	16A	-				

#### Mechanical Dimensions

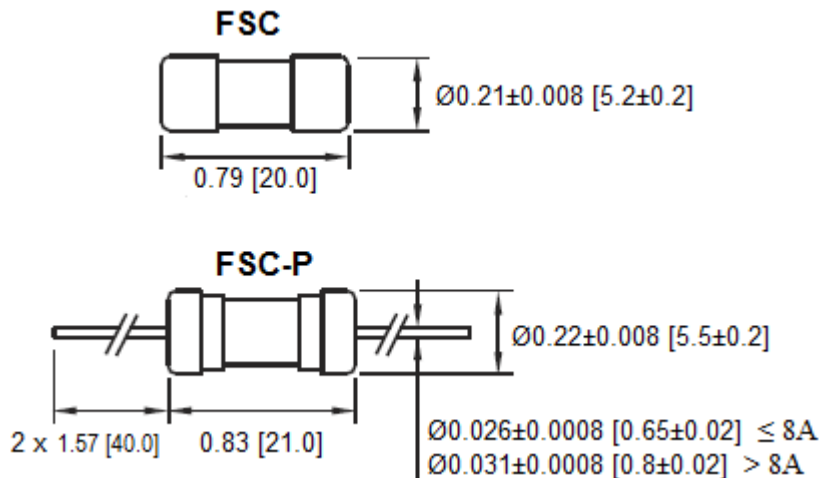


Note: All specifications subject to change without notice.

**Type FSC / FSC-P**  
**Fast Acting Glass Tube Fuse**  
**5 x 20 mm**



www.optifuse.com (619) 593-5050

**PART NUMBER FSC / FSC-P**  
**TIME CURRENT CURVES**

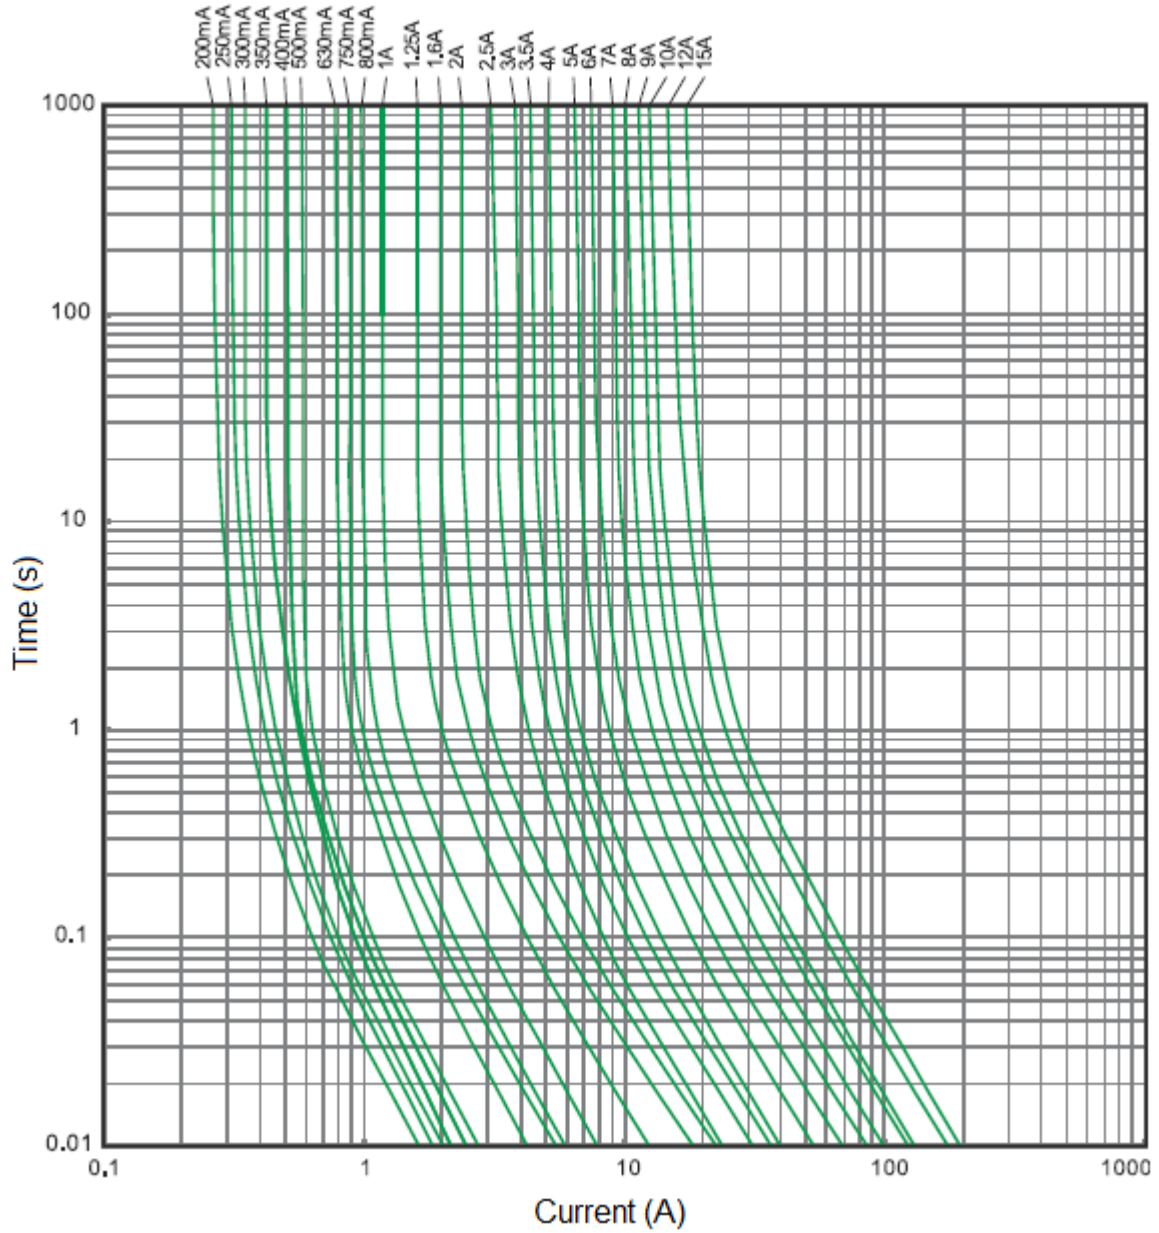

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optifuse](#) manufacturer:*

Other Similar products are found below :

[ACB-12-V-30A](#) [ACB-12-V-50A](#) [ACBP4-PM-5A](#) [ANM-2A](#) [ANM-3A](#) [ANM58-1A](#) [ANR58-UL-10A](#) [ANR58-UL-20A](#) [ANR58-UL-2A](#)  
[ANR58-UL-30A](#) [ANR58-UL-3A](#) [ANR58-UL-5A](#) [ANR80-UL-40A](#) [ANR80-UL-5A](#) [APM-35A](#) [APM-5A](#) [APR-10A](#) [APR-1A](#) [APR-20A](#)  
[APR-25A](#) [APR-2A](#) [APR-30A](#) [APR-3A](#) [APR-4A](#) [APR58-UL-10A](#) [APR58-UL-15A](#) [APR58-UL-1A](#) [APR58-UL-30A](#) [APR58-UL-40A](#) [APR-](#)  
[7.5A](#) [APX-100A](#) [BLC-05-GTA](#) [BLC-09-GT](#) [BLC-20A](#) [BLC-20C](#) [BLM-304](#) [BLR-304](#) [BLR-306](#) [BLR-504](#) [BLR-I-301](#) [BLR-I-504](#)  
[CBW28-1A](#) [CBW28-2A](#) [CBW57-EL4-10A](#) [CBW57-EL4-5A](#) [CBW57-ES-10A-5H](#) [CBW57-ES-3A](#) [CBW57-ES-5A](#) [CBW57-HS-15A-5X](#)  
[CBW57-PB-10A-5X](#)