

# Type FSW

## Fast Acting Glass Tube Fuse

### Automotive Glass



www.optifuse.com

(619) 593-5050

**Fuse Size:** 1/4" x 7/8" (6.3 x 22.2mm)


**Ampere Rating:** 100mA ~ 30A

**Voltage Rating:** 125V / 32V

**Electrical Characteristics:**

100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

**Mechanical Dimensions: Inches[mm]**

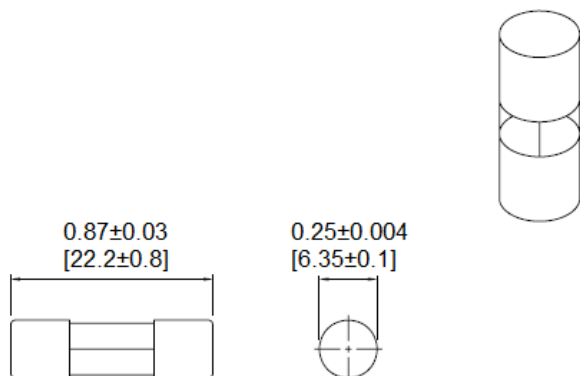

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating
FSW-100mA	100mA	10KA @125VAC	125V
FSW-125mA	125mA		
FSW-160mA	160mA		
FSW-200mA	200mA		
FSW-250mA	250mA		
FSW-300mA	300mA		
FSW-315mA	315mA		
FSW-400mA	400mA		
FSW-500mA	500mA		
FSW-600mA	600mA		
FSW-630mA	630mA		
FSW-700mA	700mA		
FSW-800mA	800mA		
FSW-1A	1A		
FSW-1.25A	1.25A		
FSW-1.5A	1.5A		
FSW-1.6A	1.6A		
FSW-2A	2A	200A @125VAC	125V
FSW-2.5A	2.5A		
FSW-3A	3A		
FSW-3.15A	3.15A		
FSW-3.5A	3.5A		
FSW-4A	4A		
FSW-5A	5A	1000A @32VAC,VDC	32V
FSW-6A	6A		
FSW-6.3A	6.3A		
FSW-7A	7A		
FSW-8A	8A		
FSW-10A	10A		
FSW-12A	12A		
FSW-13A	13A		
FSW-15A	15A		
FSW-16A	16A		
FSW-20A	20A		
FSW-25A	25A		
FSW-30A	30A		

**Warning:**



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optifuse manufacturer](#):*

Other Similar products are found below :

[FSC-3.5A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#)  
[LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-](#)  
[1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#)  
[FPK-R-8A](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#) [CBW57-ES-5A](#)  
[CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#) [FCD-4A](#)