

Type FSX

Fast Acting Glass Tube Fuse

Automotive Glass



www.optifuse.com (619) 593-5050

Fuse Size: 1/4" x 1" (6.3 x 25.4mm)

Ampere Rating: 250mA ~ 30A

Voltage Rating: 125V / 250V

Electrical Characteristics:


100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

Agency Standards and Listings:



According to UL248-14

Mechanical Dimensions: Inches[mm]

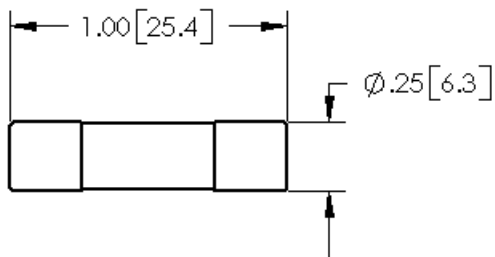

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating	UL US	CSA US	PSE JET
FSX-250mA	250mA	10KA @125VAC 35A @250VAC	125V/250V	•		
FSX-500mA	500mA			•		
FSX-750mA	750mA			•		
FSX-1A	1A	10KA @125VAC 100A @250VAC		•		•
FSX-1.25A	1.25A			•		•
FSX-1.5A	1.5A			•		•
FSX-2A	2A			•		•
FSX-2.5A	2.5A			•		•
FSX-3A	3A			•		•
FSX-4A	4A	10KA @125VAC 200A @250VAC		•		•
FSX-5A	5A			•		•
FSX-6A	6A			•		•
FSX-7A	7A			•		•
FSX-8A	8A			•		•
FSX-10A	10A			•		•
FSX-12A	12A	200A @125VAC 200A @250VAC		•	•	
FSX-15A	15A			•	•	
FSX-20A	20A			•		
FSX-25A	25A	100A @125VAC		•		
FSX-30A	30A		125V		•	

	Warning: -Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optifuse manufacturer](#):

Other Similar products are found below :

[ACB-12-V-30A](#) [ACB-12-V-50A](#) [ACBP4-PM-5A](#) [ANM-2A](#) [ANM-3A](#) [ANM58-1A](#) [ANR58-UL-10A](#) [ANR58-UL-20A](#) [ANR58-UL-2A](#)
[ANR58-UL-30A](#) [ANR58-UL-3A](#) [ANR58-UL-5A](#) [ANR80-UL-40A](#) [ANR80-UL-5A](#) [APM-35A](#) [APM-5A](#) [APR-10A](#) [APR-1A](#) [APR-20A](#)
[APR-25A](#) [APR-2A](#) [APR-30A](#) [APR-3A](#) [APR-4A](#) [APR58-UL-10A](#) [APR58-UL-15A](#) [APR58-UL-1A](#) [APR58-UL-30A](#) [APR58-UL-40A](#) [APR-](#)
[7.5A](#) [APX-100A](#) [BLC-05-GTA](#) [BLC-09-GT](#) [BLC-20A](#) [BLC-20C](#) [BLM-304](#) [BLR-304](#) [BLR-306](#) [BLR-504](#) [BLR-I-301](#) [BLR-I-504](#)
[CBW28-1A](#) [CBW28-2A](#) [CBW57-EL4-10A](#) [CBW57-EL4-5A](#) [CBW57-ES-10A-5H](#) [CBW57-ES-3A](#) [CBW57-ES-5A](#) [CBW57-HS-15A-5X](#)
[CBW57-PB-10A-5X](#)