

Type TXF Subminiature Time Delay Fuse - 3.6 x 10mm



www.optifuse.com (619) 593-5050

Time Characteristics:

100%	4h Min.	200mA-10A
200%	60s Max. 1-60s	200mA-800mA 1A-10A


Interrupt Rating:

200mA~ 1.6A 30A at 350 VAC
2A ~ 10A 50A at 350 VAC


Packaging:

1,500 pieces taped and ammo pack

Time Current Curve Graph

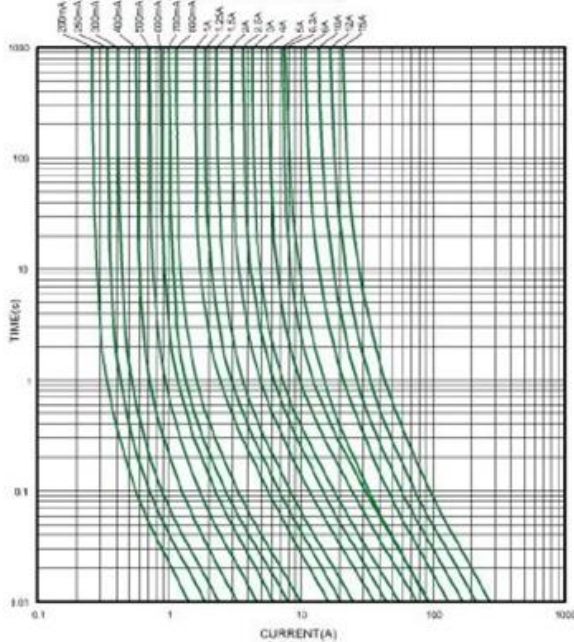

Mechanical Dimensions:

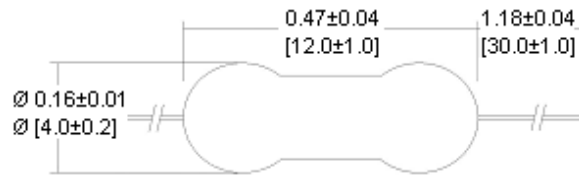

Epoxy Coated

Part Number	Amperage	Rated Voltage (VAC)	I ² T Reference A ² Sec
TXF-200mA	200mA	350V	0.0200
TXF-250mA	250mA		0.0352
TXF-300mA	300mA		0.0562
TXF-315mA	315mA		0.0620
TXF-350mA	350mA		0.0765
TXF-375mA	375mA		0.0878
TXF-400mA	400mA		0.107
TXF-500mA	500mA		0.219
TXF-600mA	600mA		0.387
TXF-630mA	630mA		0.427
TXF-700mA	700mA		0.642
TXF-750mA	750mA		0.742
TXF-800mA	800mA		1.000
TXF-1A	1A		2.692
TXF-1.2A	1.2A		3.825
TXF-1.25A	1.25A		4.111
TXF-1.5A	1.5A		6.252
TXF-1.6A	1.6A		7.113
TXF-2A	2A		13.14
TXF-2.25A	2.25A		17.46
TXF-2.5A	2.5A	20.32	
TXF-3A	3A	31.05	
TXF-3.15A	3.15A	34.23	
TXF-3.5A	3.5A	44.25	
TXF-4A	4A	58.34	
TXF-5A	5A	90.36	
TXF-6A	6A	86.25	
TXF-6.3A	6.3A	95.09	
TXF-7A	7A	120.8	
TXF-8A	8A	175.4	
TXF-9A	9A	228.6	
TXF-10A	10A	297.8	

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optifuse manufacturer](#):

Other Similar products are found below :

[FSC-3.5A](#) [TSA-250MA](#) [BLR-304](#) [BLR-504](#) [BLC-05-GTA](#) [BLR-I-504](#) [BLM-304](#) [CBW57-EL4-10A](#) [FPK-10A](#) [FPK-1A](#) [FPK-30A](#) [LPM-08](#)
[LPX-23B-08R-LOOP](#) [FPK-12A](#) [FPK-15A](#) [FPK-20A](#) [FPK-25A](#) [FPK-2A](#) [FPK-3A](#) [FPK-4A](#) [FPK-5A](#) [FPK-6A](#) [FPK-7A](#) [FPK-8A](#) [FPK-R-](#)
[1.5A](#) [FPK-R-10A](#) [FPK-R-15A](#) [FPK-R-1A](#) [FPK-R-20A](#) [FPK-R-25A](#) [FPK-R-2A](#) [FPK-R-30A](#) [FPK-R-3A](#) [FPK-R-4A](#) [FPK-R-5A](#) [FPK-R-6A](#)
[FPK-R-8A](#) [PMG-KB-01-Q2S](#) [LPM-01B-12R](#) [ACB-12-V-50A](#) [LPR-13C-10R](#) [ACBP4-PM-5A](#) [BLR-306](#) [ACB-12-V-30A](#) [CBW57-EL4-5A](#)
[CBW57-ES-5A](#) [CBW57-PB-10A-5X](#) [CBW57-PS-10A-5X](#) [CBW57-PS-3A-1X](#) [CBW28-1A](#)