


# OAB18055 Series



AC Blower, ball bearing  
182x55 (7.17"x 2.17")

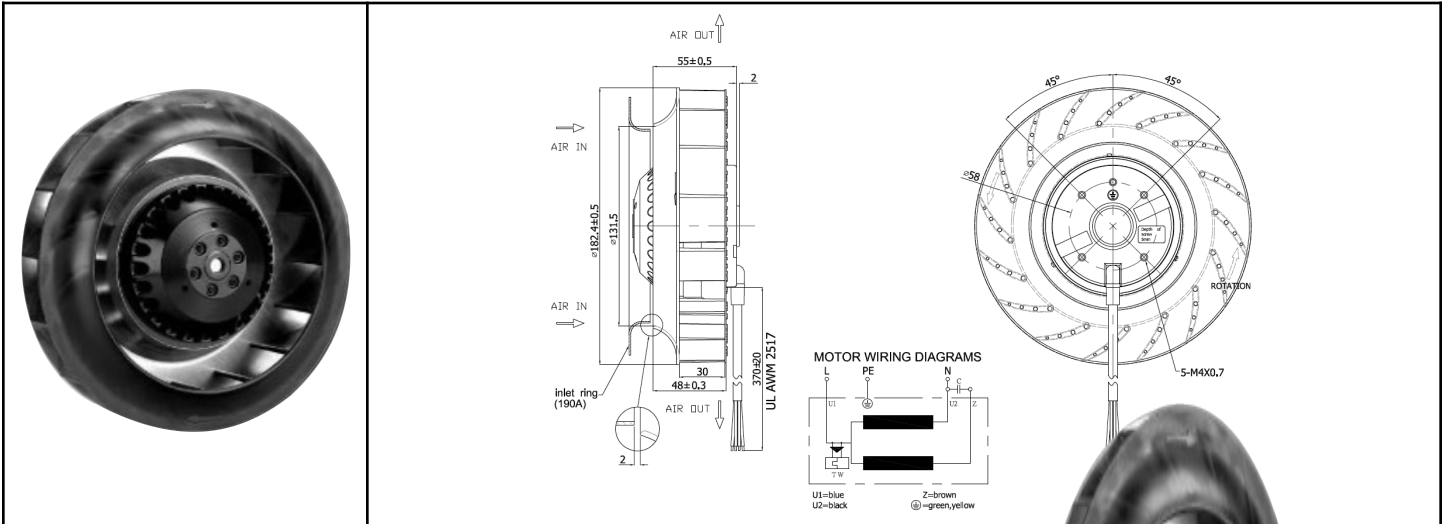

<b>Backwards Curved Impeller</b>		<p><u>Insulation Housing:</u> AC1500V / 1 minute</p> <p><u>Insulation Resistance:</u> &gt; 100 M ohms DC500V</p> <p><u>Operating Temperature</u> -40 C ~ +60C</p> <p><u>Life Expectancy</u> 40,000 hours (L10, 40C) Ball bearing</p> <p>IP55 Rated Weight 2.65 lbs.</p> <p>m2</p>	<p>Blue = 60Hz Red = 50Hz</p>
<b>Frame &amp; Impeller</b>	<p>Frame - Diecast aluminum Impeller - UL94V-O Thermoplastic</p>		
<b>Connection</b>	Lead Wires		
<b>Motor</b>	<p>AC Capacitor drive 10uF/250V (115V) 2uF/450V (230V) (Capacitor Included)</p>		
<b>Bearing System</b>	Dual Ball		

Part Number	OAB18055-11-1WB	OAB18055-23-1WB
Nominal Voltage	115 VAC (50/60 Hz)	230 VAC (50/60 Hz)
Nominal Current (Amps)	0.60 / 0.70	0.30 / 0.34
Locked Current (Amps)	0.92 / 0.95	0.46 / 0.48
Rated Power	63 / 78 W	63 / 78 W
Rated Speed (RPM)	2550 / 2800	2550 / 2800
Airflow (CFM)	265 / 290	265 / 290
Noise Level (dB)	64 / 67	64 / 67
Max. Static Pressure	1.0 / 1.4" H <sub>2</sub> O	1.0 / 1.4" H <sub>2</sub> O

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Blowers & Centrifugal Fans](#) category:*

*Click to view products by [Orion](#) manufacturer:*

Other Similar products are found below :

[R2D140-AB02-14](#) [R2D160-AC02-13](#) [R2D220-AA24-13](#) [R4D310-AS18-01](#) [R4D400-AD22-06](#) [R4E180-AS11-09](#) [R4S175-AA16-12](#)  
[AIF60112](#) [AIF801724](#) [BR300W100](#) [AIF641714](#) [R1G220-AB07-09](#) [R2E180CH0312](#) [R2S150-AD08-09](#) [RD20S-4/210660](#) [RH56M-6/204689](#)  
[D2E146-CD51-09](#) [TP04G-AS2](#) [D4E133-AA01-51](#) [DFD0612H/SPECTRA](#) [Z4.802.1680.0](#) [55462.19890](#) [K1G200-AA73-02](#) [G2D160-AF02-](#)  
[01](#) [BFB04505HHA-C](#) [G2S150-AB56-42](#) [D4E225-BC01-02](#) [D2E146-HT67-63](#) [K1G220-AA67-02](#) [M39012/26-0101](#) [D4E225-BC01-23](#)  
[R3G190-AB23-02](#) [55410.91750](#) [55462.19891](#) [R1G120-AD17-11](#) [R3G250-AM70-01](#) [R2E225-AG05-20](#) [R2E225-RA02-47](#) [RER225-](#)  
[63/18/2TDMP](#) [R4E310-AO12-14](#) [D2E146-HT65-64](#) [R2D225-AG02-12](#) [RLF100-11/14/19](#) [3612751](#) [G2D140-AC30-18](#) [55416.32](#) [55416.35](#)  
[55442.41](#) [R2E225-AB05-05](#) [M39012/16-0101](#)