

# 2SC3929, 2SC3929A

## Silicon NPN epitaxial planer type

For low-frequency output amplification

Complementary to 2SA1531 and 2SA1531A

### ■ Features

- Low noise voltage NV.
- High forward current transfer ratio  $h_{FE}$ .
- S-Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

### ■ Absolute Maximum Ratings (Ta=25°C)


Parameter	Symbol	Ratings	Unit
Collector to base voltage	$V_{CBO}$	35	V
2SC3929A	2SC3929A	55	
Collector to emitter voltage	$V_{CEO}$	35	V
2SC3929A	2SC3929A	55	
Emitter to base voltage	$V_{EBO}$	5	V
Peak collector current	$I_{CP}$	100	mA
Collector current	$I_C$	50	mA
Collector power dissipation	$P_C$	150	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55 ~ +150	°C

### ■ Electrical Characteristics (Ta=25°C)










Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	$I_{CBO}$	$V_{CB} = 10V, I_E = 0$			100	nA
	$I_{CEO}$	$V_{CE} = 10V, I_B = 0$			1	μA
Collector to base voltage	$V_{CBO}$	$I_C = 10\mu A, I_E = 0$	35			V
2SC3929A			55			
Collector to emitter voltage	$V_{CEO}$	$I_C = 2mA, I_B = 0$	35			V
2SC3929A			55			
Emitter to base voltage	$V_{EBO}$	$I_E = 10\mu A, I_C = 0$	5			V
Forward current transfer ratio	$h_{FE}^*$	$V_{CE} = 5V, I_C = 2mA$	180		700	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 100mA, I_B = 10mA$			0.6	V
Base to emitter voltage	$V_{BE}$	$V_{CE} = 1V, I_C = 100mA$		0.7	1	V
Noise voltage	NV	$V_{CE} = 10V, I_C = 1mA, G_V = 80dB$ $R_g = 100k\Omega$ , Function = FLAT			150	mV
Transition frequency	$f_T$	$V_{CB} = 5V, I_E = -2mA, f = 200MHz$		80		MHz






\*<sup>1</sup> $h_{FE}$  Rank classification

Rank	R	S	T
$h_{FE}$	180 ~ 360	260 ~ 520	360 ~ 700
Marking	2SC3929	SR	SS
Symbol	2SC3929A	TR	TS
			TT

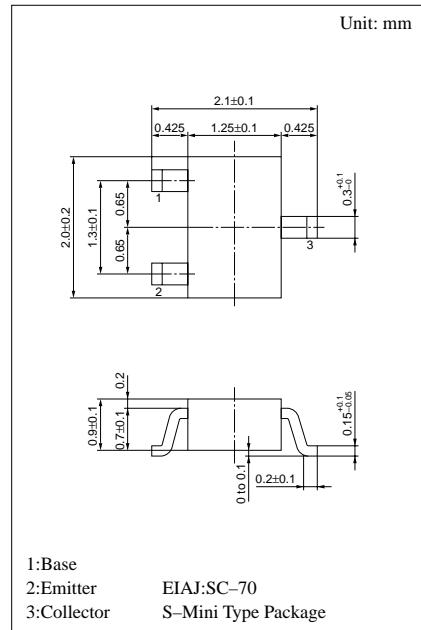

Marking symbol : **S**(2SC3929)  
**T**(2SC3929A)

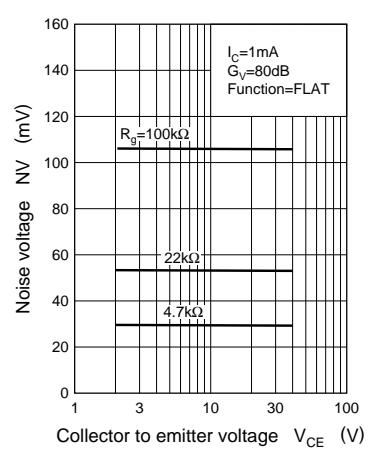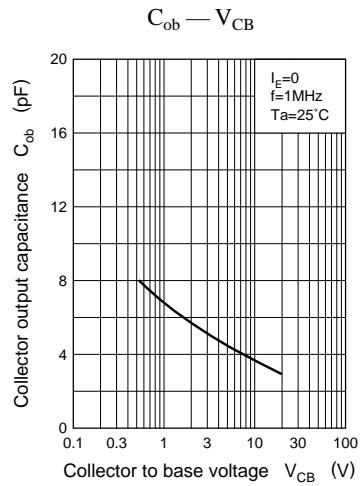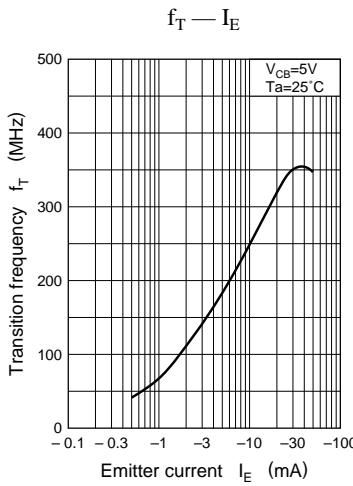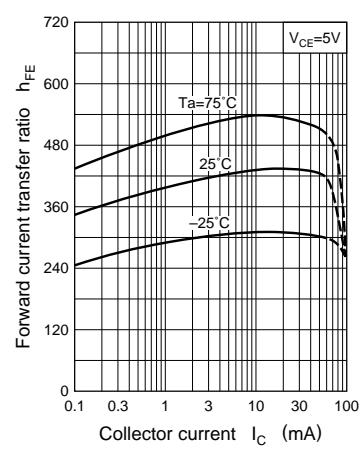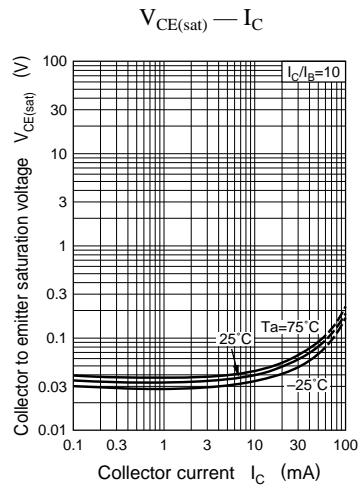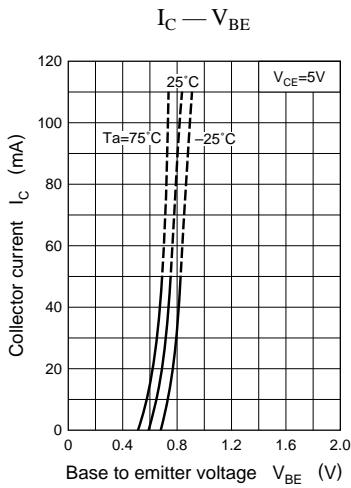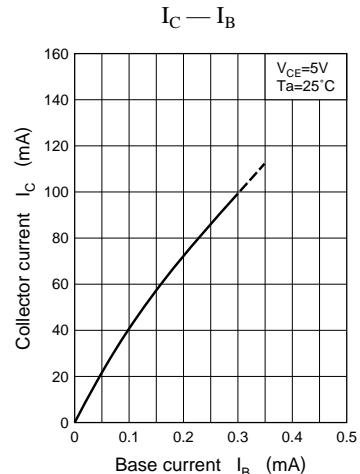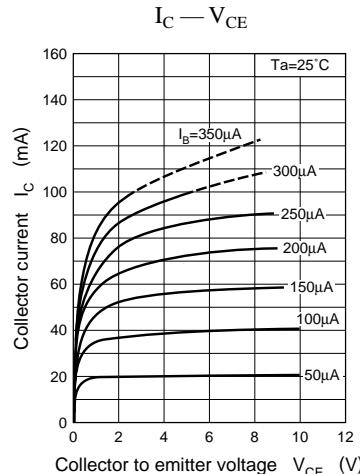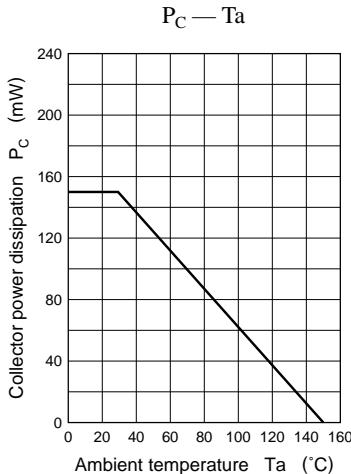

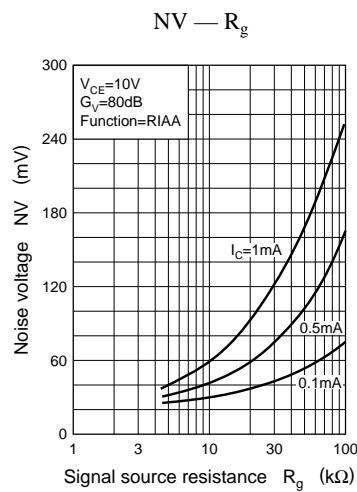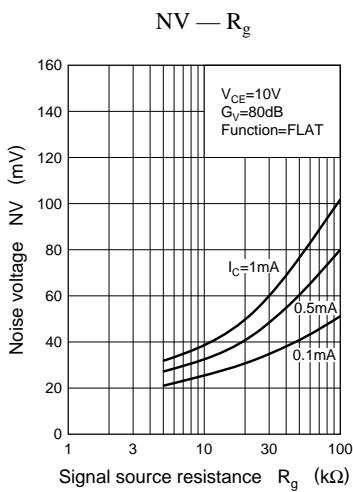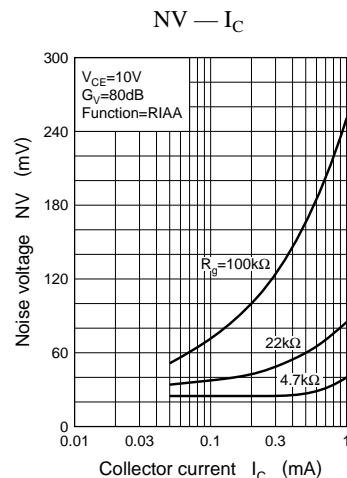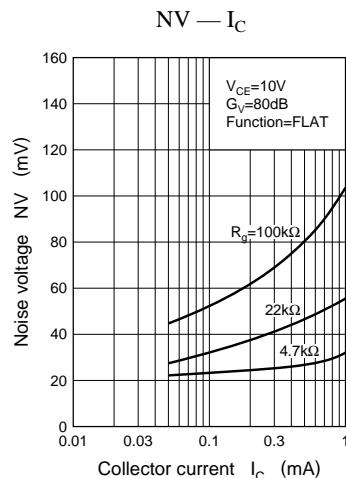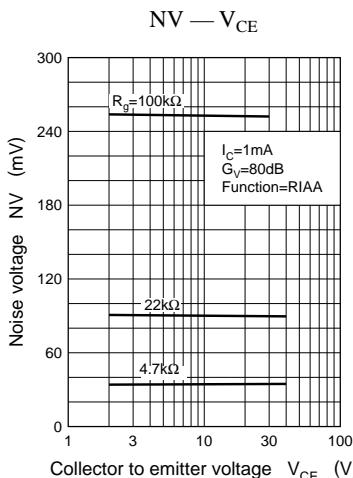

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [panasonic manufacturer:](#)***

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELC-09D151F](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-H-DC12V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HL2-H-DC110V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC4-H-AC24V](#) [HC4-H-AC120V](#) [HC4-H-DC12V](#) [AZH2031](#) [RP-SDMF64DA1](#) [EVM-F6SA00B55](#) [RP-SMLE08DA1](#) [ERZ-V20R391](#) [ELL-ATV681M](#) [ERZ-V05V680CB](#) [LT4H-DC24V](#) [LT4HL8-AC24V](#) [LT4HW-AC24V](#) [LT4HWT8-AC240V](#) [LT4HWT-AC240VS](#) [CY-122A-P](#) [ETQ-P5M470YFM](#) [EVAL\\_PAN1555](#) [EVQ-PAE04M](#) [EX-14B](#) [EX-22B-PN](#) [EX-31A-C5](#) [EXB-24N121JX](#) [MC-NA40-4](#) [EX-F72-PN](#) [EX-L211](#) [EYG-A121803V](#) [MFMCA0030AEB](#) [FCR-M50-AC208V](#) [FC-SFBH-20](#) [FC-SFBH-24](#) [FD-F8Y](#) [MHMA102A1C](#) [MHMD022S1S](#) [MHMD041S1S](#) [MHMD042G1T](#) [MHMD082G1T](#) [FD-S9](#)