

Thin type Faders for Audio Mixers
Slide Potentiometers

Japan
Malaysia

Type: **EVAJQ/EVANA/EVANB**
EVBjq/EVBNA/EVBNB




■ Features

- Thin and compact design (8.0 mm body height and 15.0 mm width)
- Light operating force and excellent operation
- Highly-accurate attenuation characteristics (maximum attenuation of more than 100 dB)
- Dustproof mounting available

■ Recommended Applications

- Fade control for common types of audio mixers

■ Explanation of Part Numbers

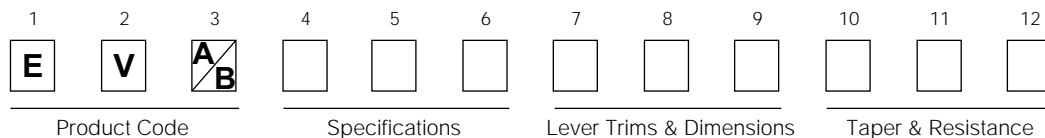

■ Specifications

| Power Rating | Taper | | Taper B | Others |
|--------------------------------|--|--|---------------------|----------------|
| | 100.0 mm Type | | 0.5 W | 0.25 W |
| | 60.0 mm Type | | 0.2 W | 0.1 W |
| | 45.0 mm Type | | 0.2 W | 0.1 W |
| Max. Operating Voltage: 30 Vac | | | | |
| Resistance * | 10 kΩ, 20 kΩ | | ±20 % | +40 % -20 % |
| Taper * | A, B, D, Y | | | |
| Maximum Attenuation | 100 dB min. (Except taper B) | | | |
| Operating Force | 0.1 N to 1.0 N | | | |
| Operating Life | 50000 cycles min. | | | |
| Minimum Quantity/Packing Unit | EVAJQ, EVBJQ | | 40 pcs. (Tray Pack) | |
| | EVANA, EVBNA EVANB, EVBNB | | 50 pcs. (Tray Pack) | |
| Quantity/Carton | EVAJQ, EVBJQ EVANA, EVBNA EVANB, EVBNB | | 200 pcs. | |

*Custom specifications negotiable


Notes:

1. Custom design for Lever Style also negotiable
2. 45.0 mm travel type also available (External dimensions same as 60.0 mm type)


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)


- 100.0 mm Travel, Single EVAJQ
- Dual EVBJQ

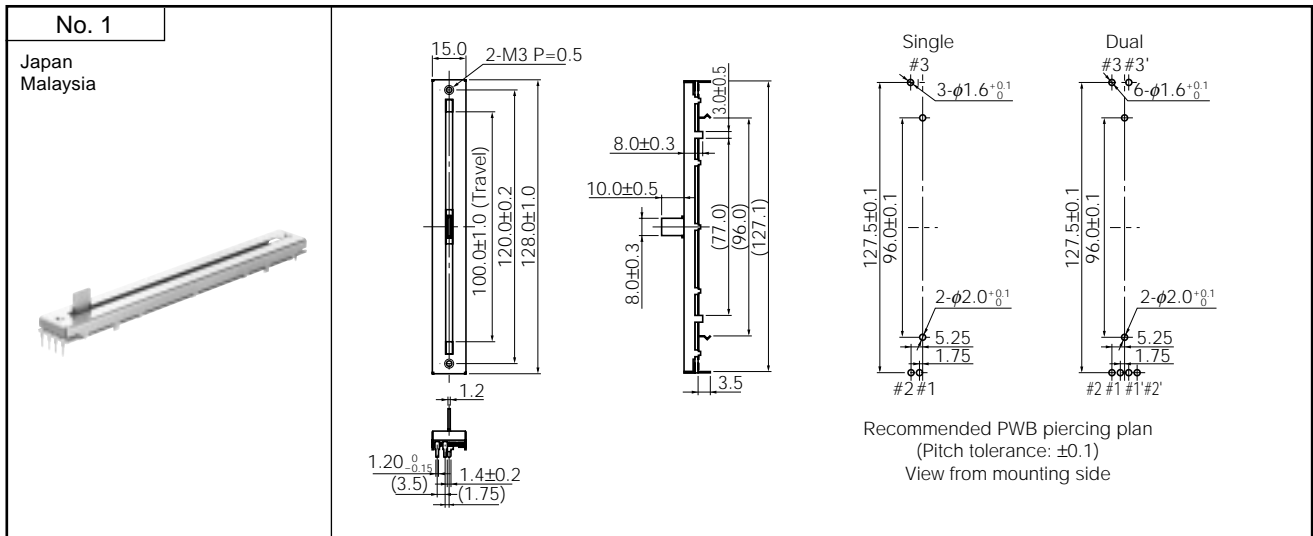

- 60.0 mm Travel, Single EVANA
- Dual EVBNA

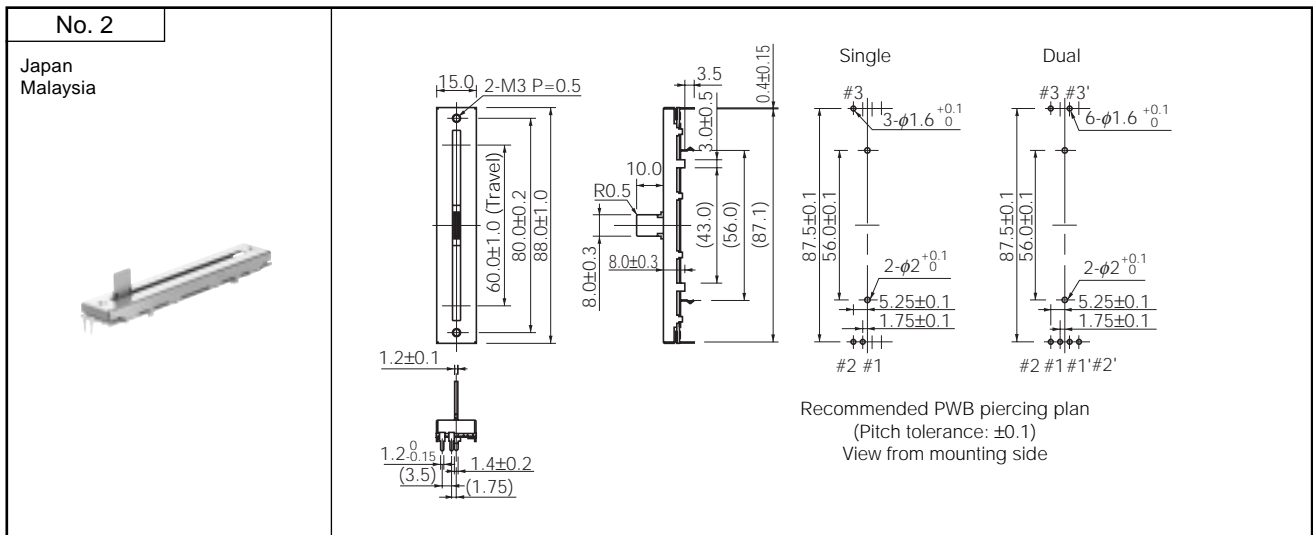

- 45.0 mm Travel, Single EVANB
- Dual EVBNB

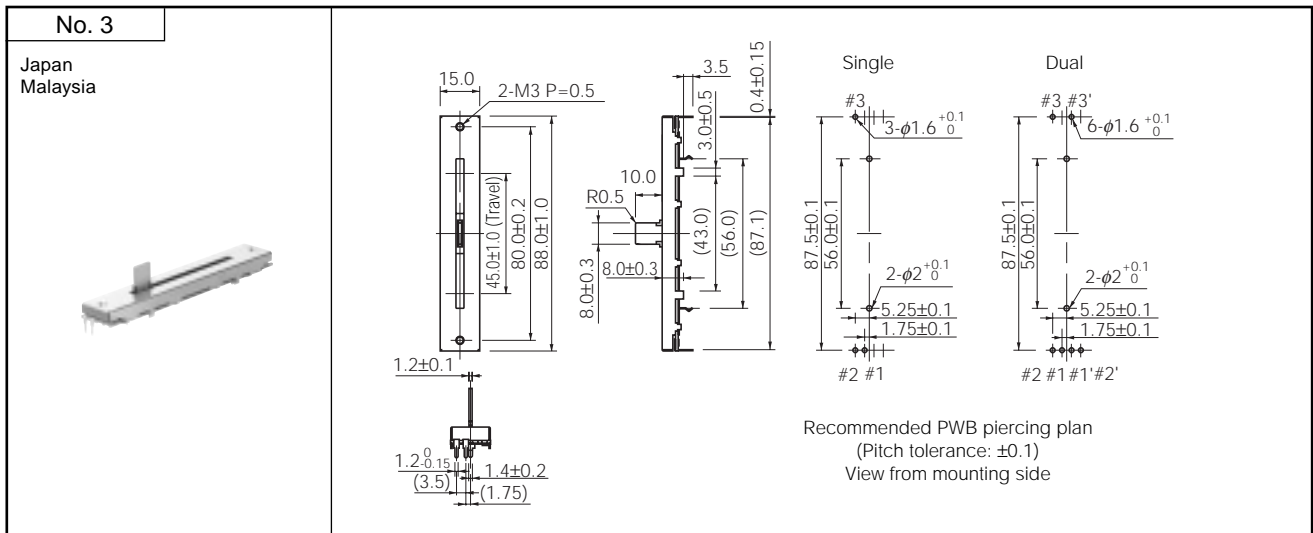

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [panasonic](#) manufacturer:

Other Similar products are found below :

[ECE-A1HKAR47](#) [ELC-09D151F](#) [HC2-H-DC48V-F](#) [HL2-HP-AC120V-F](#) [HL2-H-DC12V-F](#) [HL2-HP-DC12V-F](#) [HL2-HP-DC6V-F](#) [HL2-HP-DC24V-F](#) [HL2-H-DC110V-F](#) [HC4-H-DC24V](#) [HL2-HTM-DC24V-F](#) [HL2-HTM-AC24V-F](#) [HC4-H-AC24V](#) [HC4-H-AC120V](#) [HC4-H-DC12V](#) [AZH2031](#) [RP-SDMF64DA1](#) [EVM-F6SA00B55](#) [RP-SMLE08DA1](#) [ERZ-V20R391](#) [ELL-ATV681M](#) [ERZ-V05V680CB](#) [LT4H-DC24V](#) [LT4HL8-AC24V](#) [LT4HW-AC24V](#) [LT4HWT8-AC240V](#) [LT4HWT-AC240VS](#) [CY-122A-P](#) [ETQ-P5M470YFM](#) [EVAL_PAN1555](#) [EVQ-PAE04M](#) [EX-14B](#) [EX-22B-PN](#) [EX-31A-C5](#) [EXB-24N121JX](#) [MC-NA40-4](#) [EX-F72-PN](#) [EX-L211](#) [EYG-A121803V](#) [MFMCA0030AEB](#) [FCR-M50-AC208V](#) [FC-SFBH-20](#) [FC-SFBH-24](#) [FD-F8Y](#) [MHMA102A1C](#) [MHMD022S1S](#) [MHMD041S1S](#) [MHMD042G1T](#) [MHMD082G1T](#) [FD-S9](#)