

5N Type Side-operational Light Touch Switches

Type: **EVQPF**



■ Features


- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

! To Be Discontinued
Last time buy: December 31, 2020

■ Recommended Applications

- Operating switches for other electronic equipment

■ Explanation of Part Numbers

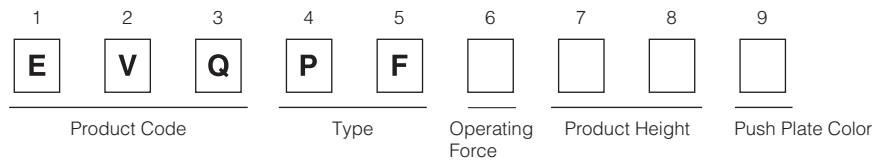

■ Specifications

Type		Snap action/Push-on type SPST	
Electrical	Circuit Diagram		
	Rating	10 μA 2 V DC to 20 mA 15 V DC (Resistive load)	
	Contact Resistance	50 mΩ max.	
	Insulation Resistance	50 MΩ min. (at 100 V DC)	
	Dielectric Withstanding Voltage	250 V AC for 1 minute	
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
	Operating Force	1.0 N±0.4 N 1.3 N±0.4 N 1.6 N±0.5 N	2.6 N±0.6 N
	Travel	0.25 mm±0.10 mm	
Endurance	Operating Life	100,000 cycles min.*	50,000 cycles min.
Operating Temperature		-20 °C to +70 °C	
Storage Temperature		-40 °C to +85 °C (Bulk)	
Minimum Quantity/Packing Unit		500 pcs. Polyethylene Bag (Bulk)	
Quantity/Carton		10,000 pcs.	

*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVQPF	<p>General dimension tolerance : ± 0.3 () dimensions are reference dimensions.</p> <div style="border: 1px solid red; padding: 5px; display: inline-block;"> To Be Discontinued Last time buy: December 31, 2020 </div>			
	<div style="display: flex; justify-content: space-around;"> <div data-bbox="510 414 758 761"> </div> <div data-bbox="837 425 1109 750"> </div> <div data-bbox="1189 459 1380 694"> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div data-bbox="526 851 805 1030"> <p>PWB mounting hole for reference (PWB thickness=1.6 mm) View from mounting side</p> </div> <div data-bbox="901 896 1029 1086"> <p>Circuit diagram</p> </div> </div>			
Part Numbers	Operating Force	ℓ=Push Plate Place	Push Plate Color	Operating Life
EVQPF003M	1.0 N	3.15 mm	White	100,000 cycles
EVQPF004R	1.0 N	3.85 mm	Red	100,000 cycles
EVQPF006K	1.0 N	5.85 mm	Black	100,000 cycles
EVQPF008K	1.0 N	8.35 mm	Black	100,000 cycles
EVQPF103M	1.3 N	3.15 mm	White	100,000 cycles
EVQPF104R	1.3 N	3.85 mm	Red	100,000 cycles
EVQPF106K	1.3 N	5.85 mm	Black	100,000 cycles
EVQPF108K	1.3 N	8.35 mm	Black	100,000 cycles
EVQPF203M	1.6 N	3.15 mm	White	100,000 cycles
EVQPF204R	1.6 N	3.85 mm	Red	100,000 cycles
EVQPF206K	1.6 N	5.85 mm	Black	100,000 cycles
EVQPF208K	1.6 N	8.35 mm	Black	100,000 cycles
EVQPF303M	2.6 N	3.15 mm	White	50,000 cycles
EVQPF304R	2.6 N	3.85 mm	Red	50,000 cycles
EVQPF306K	2.6 N	5.85 mm	Black	50,000 cycles
EVQPF308K	2.6 N	8.35 mm	Black	50,000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[5GTH92001](#) [5GTH9202242](#) [1-1977120-4](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSMW66NV](#) [ADTSMW67RV](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSM21NSVTR](#) [ADTSM32NVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [3ESH9R](#) [506E00201](#) [MJTP1164TR](#) [3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#) [101-TS5022T1601-EV](#) [5GSH92001](#) [KSJ0A231](#) [80SH LFG](#) [EVQ-P1D05K](#) [MJTP1162TR](#) [ADTSM63KV](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [KMT011MNGJLHS](#) [B3WN6002S](#) [ADTSA648RV](#) [70-201.0](#) [ADTSM62KSVTR](#) [ATA600VTR](#) [ADTSG66RV](#) [ADTS61NV](#) [ADTSM62KVTR](#) [ADTSM25KSVB](#)