# 27/18 mm Center Space Encoders

#### Type: **EVQV5**




#### ■ Features

- Multiple unit construction (achieved by mounting switches, LEDs, etc.)
   (center space) on the printed wiring board
- Good operability and high reliability

#### ■ Recommended Applications

- Car audio products (adjustment of volume, tone, tuners, etc.)
- AV equipment (control of edit functions of VCRs, CD players, etc.)


## ■ Explanation of Part Numbers



# ■ Specifications

Mechanical	Rotation Angle	360 ° (Endless)
	Rotation Torque (Detents Torque)	9 mN·m, 13.5 mN·m, 18 mN·m
	Detents	18 points, 30 points
Electrical	Output Signal	Phase A and B
	Resolution	9 pulses/360 °, 15 pulses/360 °
	Rating	1 mA 10 Vdc
	Contact Resistance	1 $\Omega$ max.
	Chattering	5 ms max.
	Insulation Resistance	50 m $\Omega$ min. (at 250 Vdc)
	Dielectric Withstanding Voltage	300 Vac for 1 minute
Endurance	Rotation Life	30000 cycles min.
Minimum Quantity/Packing Unit		80 pcs. (Tray Pack)
Quantity/Carton		1600 pcs.

## ■ 形状寸法 (mm)

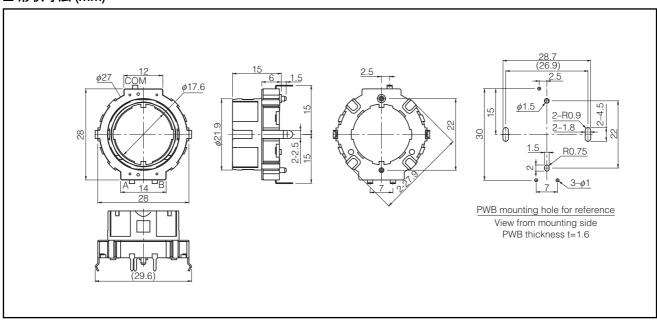

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Encoders category:

Click to view products by Panasonic manufacturer:

Other Similar products are found below:

6-1393048-0 6-1393048-5 62AG22-H5-P 62B22-LP-030C 63K25 63K32 63KS100 63KS64 63R100 63R50-020 63RS256-060 700-09-36
RE12D300-201-1 1393047-3 2-1393047-2 T101-5C2-111-M1 T101-5C3-111-M1 T101-5C4-111-M1 385001M0439 385001M0216
V23401H1409B101 V23401T8002B802 V23401U6019B609 E69-1 E69DF10 E69-FCA 62B11-LP-100S 62N11-P 62S22-H9-120S 62S30L0-200C 62V15-02-080S 63K64 63KS100-040 63R64-050 63RS64 700-16-16 V23401D3002B301 3-1393048-1 63KS128 63KS256 11879391-5 GH65C11-N-SO 62S15-M0-P 63R64 1393047-1 E69-FCA02 E69-FCA04 E69-DF20 E69-DF2 63R50