


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


FIBER POSITION 1 2 3 4 5 6 7 8 9 10 11 12

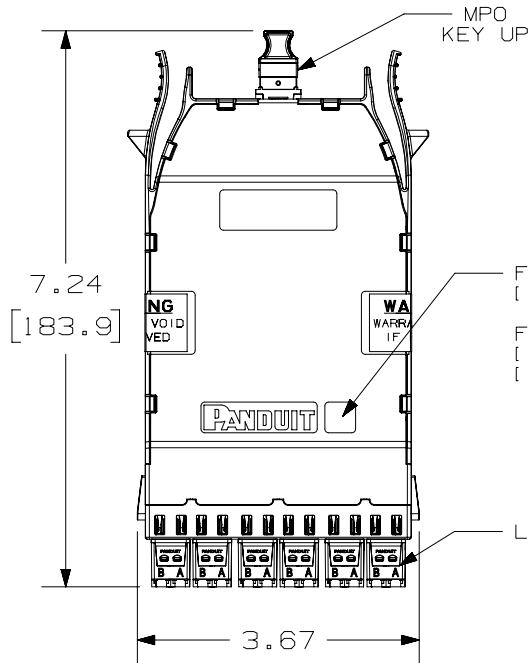

FOR AS, AF, OR U: POLARITY LABEL [AS],[AF], OR [U] ON COVER ONLY


FOR BN: POLARITY LABEL [B END 1] ON COVER AND [B END 2] ON BASE.

FIBER POSITION 1 2 3 4 5 6 7 8 9 10 11 12

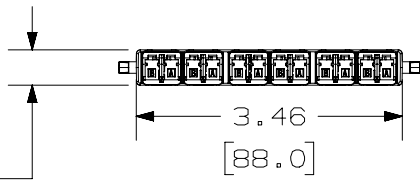

NOTES:

1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
3. PART NUMBERS: SEE SHEET 2 FOR ALL PART NUMBERS.
4. CASSETTE WIRING COMPLIES WITH ANSI/TIA-568.3-D.
5. CASSETTE WEIGHT: 3oz (85g)
6. SEE TABLE ON SHEET 2 FOR LIST OF PART NUMBERS.

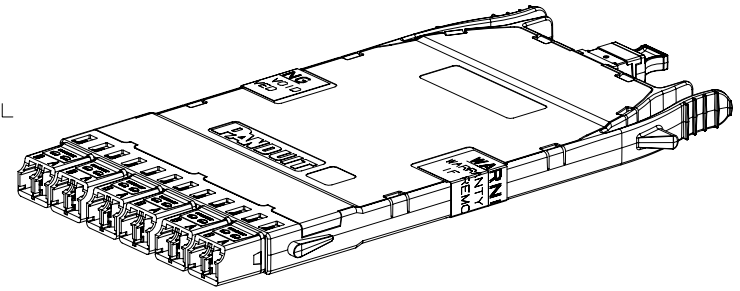

METHOD A 12F - CASSETTE (AS)												
MPO END / LC END	FIBER POSITION FROM MPO END TO LC END											
MPO	1	2	3	4	5	6	7	8	9	10	11	12
LC	1	2	3	4	5	6	7	8	9	10	11	12
METHOD A FLIPPED 12F - CASSETTE (AF)												
MPO END / LC END	FIBER POSITION FROM MPO END TO LC END											
MPO	1	2	3	4	5	6	7	8	9	10	11	12
LC	2	1	4	3	6	5	8	7	10	9	12	1
METHOD B 12F - CASSETTE (BN)												
MPO END / LC END	FIBER POSITION FROM MPO END TO LC END											
MPO	12	11	10	9	8	7	6	5	4	3	2	1
LC	1	2	3	4	5	6	7	8	9	10	11	12
UNIVERSAL 12F - CASSETTE (U)												
MPO END / LC END	FIBER POSITION FROM MPO END TO LC END											
MPO	1	2	3	4	5	6	7	8	9	10	11	12
LC	1	12	2	11	3	10	4	9	5	8	6	7

NOTE: B END CASSETTE HAS B END 1 AND B END 2 POLARITY LABELS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01D	06-26-18	SAT	PJI	EJH	D. UPDATED NOTE 4. C. ADDED UNIVERSAL P/N's.	12F187HA-DC
01C	10-31-17	SAT	JGD	EJH	B. ADDED P/N's FHCWA-12-10AS, FHCWA-12-10AF & FHCWA-12-10BN.	12F187HA-DC
2	5/18/15	JSP	JAWI	RAR	A. ADDED WIRE CHART.	12F187HA-DC
1	02-09-15	SAT	JESA	RAR	RELEASED TO PRODUCTION	12F187HA-DC

TITLE		HD FLEX 12 FIBER LC - MPO CASSETTE		
		CUSTOMER DRAWING		
ITEM REVISION NAME		12F187HA/01		
DATASET FILE NAME		12F187HA_DC/01D		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				
.x ± .1 [2.54]      .xxx ± .005 [0.127] .xx ± .01 [0.25]      ANGLES ± 5 °				
DRAWING NUMBER:		12F187HA-DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
SAT	01-22-15	JESA	NONE	A



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Connectors](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709034706](#) [F709722200](#) [F709730000](#) [9446W18-19S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#) [AX103923](#) [AX104193](#) [AX104230](#) [AX104498](#) [AX104562](#) [AX105205-S1](#) [17-300800](#) [180-044NF06-11-2S](#) [180-044NF06-17-8P](#) [180-044NF07-11-2S](#) [9132](#) [2612](#) [2620](#) [9291](#) [9440F18-19S](#) [9440W18-1S](#) [9442W14S-10P](#) [9446FS28-13P-LC](#) [953-120-5003](#) [955-120-5110](#) [1757711-1](#) [180-044NF06-21-16P](#) [180-044NF07-11-2P](#) [180-122NFS7-11-4N](#) [181-001-127](#) [F718100000](#) [FN379-2-](#) [21919-4](#) [CF-509621-29P](#) [CF-5A4011-02N](#) [H05040010](#) [330-8674-013](#) [AX104121](#) [AX104271](#) [AX105210-S1](#) [501048-1](#) [05.502.1400.0](#) [106012-7500](#)