




# PJ78M09TE

## 3-Terminal Voltage Regulator

### Features

- Input Voltage up to 35V
- Output Voltage: 9V
- Output Current: 0.5A (Max)
- Overload Protection and Short-Circuit Limiting.

TO-252

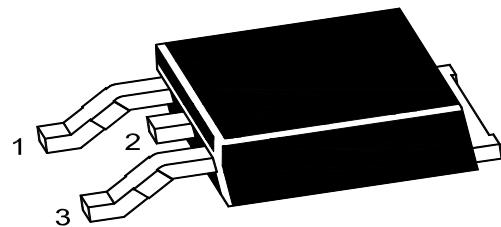


1.IN    2.GND    3.OUT

### Absolute Maximum Ratings

Ratings at  $T_A = 25^\circ\text{C}$  unless otherwise specified.

Parameter	Symbol	Value	Unit
Input Voltage	$V_I$	35	V
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	100	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-Case	$R_{\theta JC}$	8.0	$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_{OPR}$	-40~125	$^\circ\text{C}$
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~150	$^\circ\text{C}$

### Application Circuit

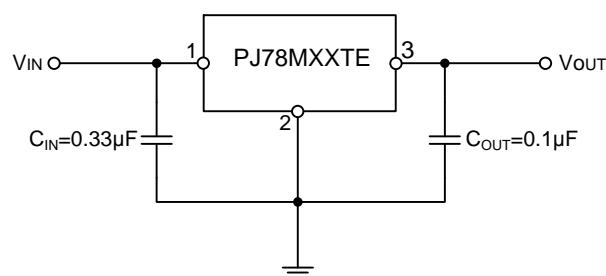



# PJ78M09TE

## 3-Terminal Voltage Regulator

### Electrical Characteristics

Ratings at  $V_i=15V$ ,  $I_o=350mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ ,  $T_J=25^\circ C$  unless otherwise specified.







Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_o$		8.65	9	9.35	V
		$V_i=11.5V \sim 24V$ $I_o=5mA \sim 350mA$	8.55	9	9.45	V
Load Regulation	$\Delta V_o$	$I_o=5mA \sim 500mA$	-	-	180	mV
		$I_o=5mA \sim 200mA$	-	-	90	mV
Line Regulation	$\Delta V_o$	$V_i=11.5V \sim 25V$ , $I_o=200mA$	-	-	180	mV
		$V_i=12V \sim 25V$ , $I_o=200mA$	-	-	90	mV
Output Noise Voltage	$V_N$	$f=10Hz \sim 100KHz$	-	58	-	$\mu V$
Ripple Rejection	RR	$V_i=13V \sim 23V$ , $f=120Hz$ , $I_o=300mA$	56	-	-	dB
Quiescent Current	$I_Q$		-	-	6	mA
Quiescent Current Change	$\Delta I_Q$	$V_i=11.5V \sim 25V$ , $I_o=200mA$	-	-	0.8	mA
		$I_o=5mA \sim 350mA$	-	-	0.5	mA
Dropout Voltage	$V_D$	$I_o=350mA$	-	2	-	V
Short Circuit Current	$I_{sc}$	$V_i=35V$	-	50	-	mA



# PJ78M09TE

## 3-Terminal Voltage Regulator

### Typical Characteristics Curves

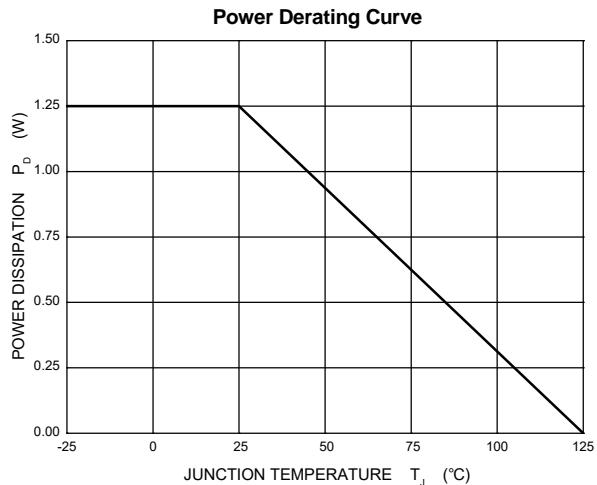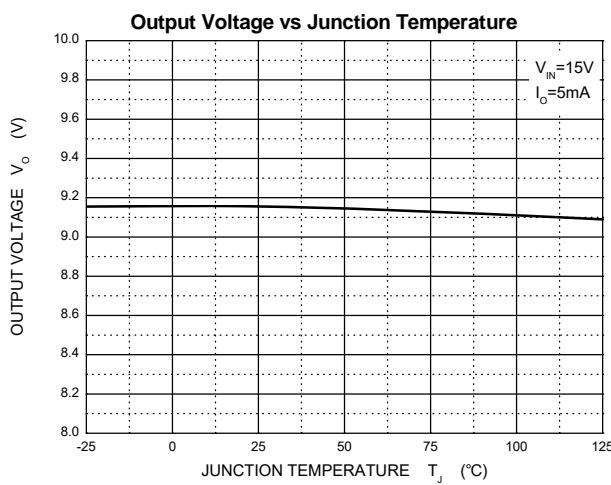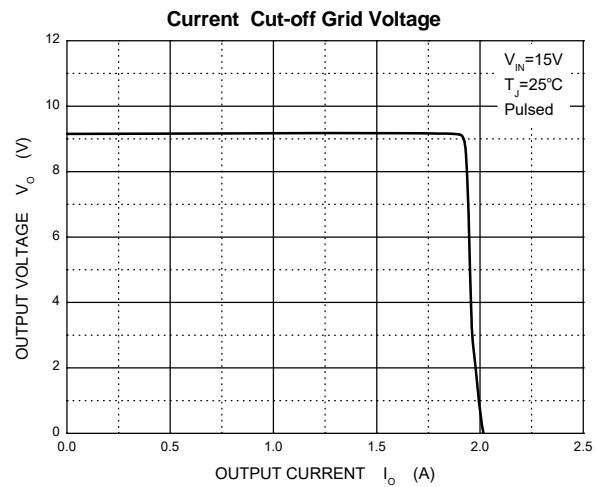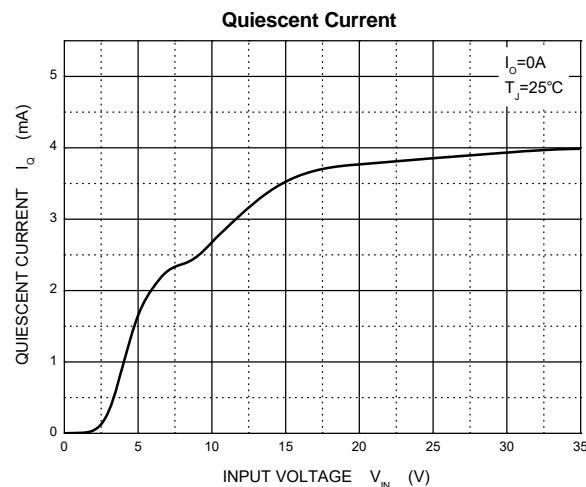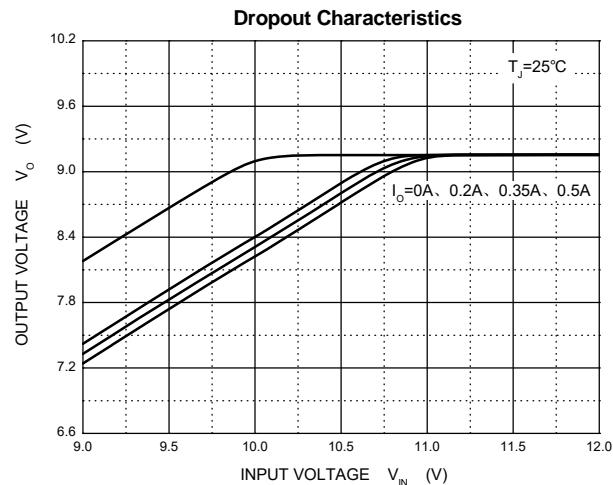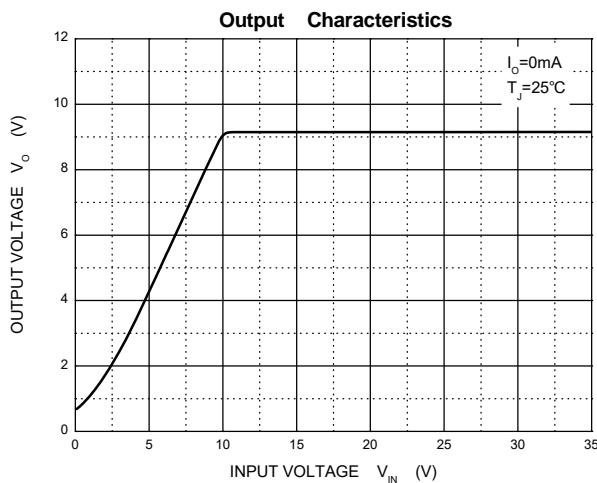




# PJ78M09TE

## 3-Terminal Voltage Regulator

### Package Outline TO-252

Dimensions in Millimeters

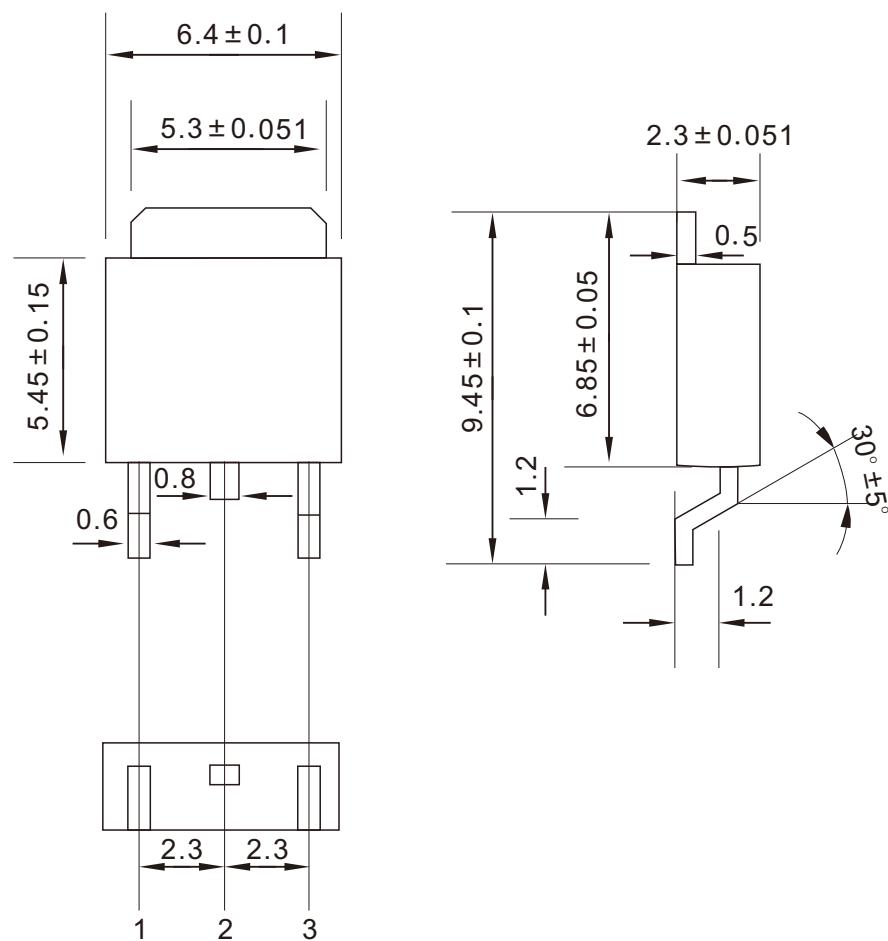

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [Pingjingsemi manufacturer:](#)***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TCR3DF13,LM\(CT](#)  
[TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#) [636416C](#)  
[NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [NCV78M05ABDTRKG](#)  
[NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)  
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)  
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)  
[MC78M12CDTT5G](#) [L9468N](#) [LT1054IS8#TRPBF](#)