

REPLACEMENT COVER

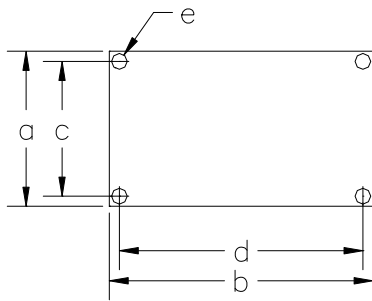


FIG. 1

MOUNTING COVER

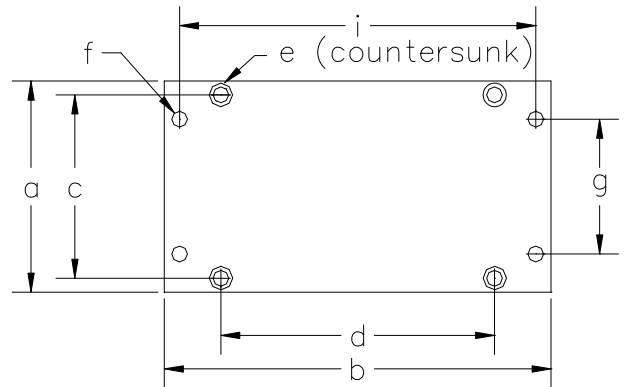


FIG. 2

REPLACEMENT COVER

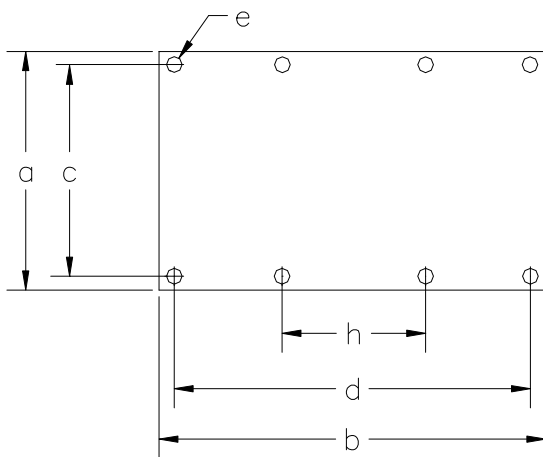


FIG. 3

MOUNTING COVER

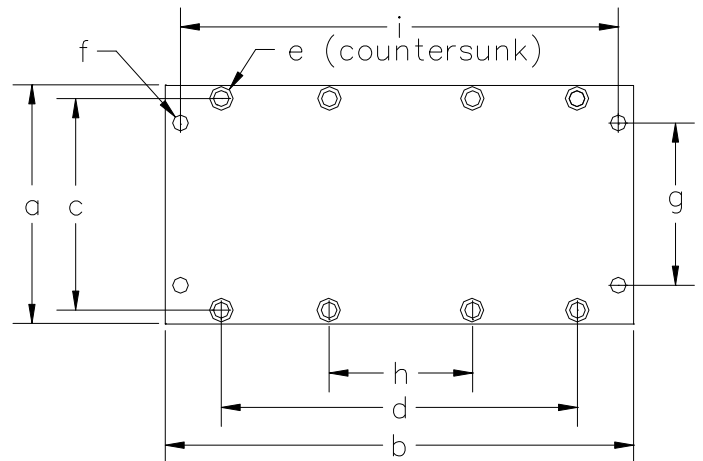


FIG. 4

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com

For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Model	Fits Box Size	Fig.	Material	Material Thickness	a	b	c	d	e	f	g	h	i
4742	Miniature	1	1100-H14	0.040	1.04	1.41	.843	1.22	.096	-	-	-	-
4245	A	1	1100-H14	0.040	1.03	2.16	.843	1.97	.096	-	-	-	-
3728	A	3	6061-T6	0.080	1.15	3.25	.843	2.94	.150	.100	-	1.96	-
4246	B	1	1100-H14	0.040	1.28	2.16	1.09	1.97	-	-	-	-	-
3719	B	3	6061-T6	0.090	1.40	3.25	1.09	2.94	.150	.100	-	1.96	-
4248	C	3	1100-H14	0.080	2.50	4.12	2.25	3.87	.140	-	-	1.29	-
4726	D	1	1100-H14	0.063	2.48	2.99	2.25	2.63	-	-	-	-	-
4416	E	3	1100-H14	0.080	4.02	8.12	3.80	7.90	.140	-	-	2.63	-
4247	F,G,H	3	1100-H14	0.080	2.50	4.12	2.25	3.87	-	-	-	-	-
3328	F,G,H	4	6061-T6	0.080	2.50	5.25	2.25	3.87	.140 (CS)	.201	1.75	1.29	4.75
4658	J	1	1100-H14	0.063	1.37	4.12	1.20	3.95	.096	-	-	-	-
5198	L	1	1100-H14	0.063	2.87	5.87	2.70	5.70	.096	-	-	-	-

CS = Countersunk Hole

All dimensions are in inches. To convert to metric multiply inches by 25.4.

Model	Replace Screws (package of 100)	Connector Screws with Solder Turret (package of 100)
Miniature	4864	2352
A	4864	2352
B	4864	2352
C	-	2352
D	-	2352
E	-	-
F	4862	2352
G	4862	-
H	4862	-
J	4864	2352
L	4864	-

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com
For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Connectors](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[5739](#) [5752](#) [5757](#) [912](#) [MXHS83QE1000](#) [IB3-10-SP01](#) [1691](#) [CR-43](#) [M08SW](#) [M10X100](#) [4247](#) [MM126037](#) [3316](#) [108-0772-001](#) [5747](#) [5754](#)
[86101-07A01](#) [5753](#) [MM126511](#) [MM126527](#) [5760](#) [2375380-1](#) [134328](#) [4248](#) [5735](#) [MM126056](#) [MM126310](#) [MXHS83QE3000](#) [4320-01069-](#)
[0](#) [SV225](#) [CS20MA](#) [3296](#) [3302](#) [783538-01](#) [3602](#) [3719](#) [3728](#) [923835-WT-C](#) [4226](#) [4245](#) [4246](#) [4903](#) [MXFR01JA1000](#) [5734](#) [5740](#) [5744](#) [911](#)
[4057](#) [BU-30212-0](#) [CT3878-0](#)