



#### FEATURES:

- ✓ Fits coax cable types RG 58 and RG 141 with cable OD of: .185" to .200" (4.7mm to 5.08mm)
- ✓ Do-It-Yourself and field serviceable.
- ✓ Strain relief boot.

#### MATERIALS:

##### Connector:

- Body and Fittings – Brass per QQ-B-626, Alloy 360, ½ Hard.
- Center Contact – Brass per QQ-B-626, Alloy 360, ½ Hard.
- Dielectric – Teflon per ASTM D1457.
- Vee Gasket – Silicone rubber per QQ-R-765, Class 11A, Grade 50.
- Clamp Nut – Brass per QQ-B-626, Alloy 360, ½ Hard.

##### Finish:

- Body and Fittings – Nickel plated, tarnish resistant
- Center Contact – Gold plated per requirements of MIL-C-39012
- Clamp Nut – Nickel plated per QQ-N-290, Class 2.

#### RATINGS:

- Impedance: 50 Ohms
- Frequency: DC to 3 GHz.
- VSWR: 1.35 @ 3 GHz.
- Insertion loss: .2 dB @ 3 GHz.
- Cable Retention Force: 40 lbs.
- Mating Cycles: 500
- Temperature: +50°C. (+122°F.) Max.
- Voltage: Hands free testing in controlled voltage environments: 500 Peak Max. *For CE compliance:* not intended for hand-held use at voltage above 33 Vrms/70 Vdc.


#### ORDERING INFORMATION:

- Model 5066-0
- Boot color available in black only.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Assistance: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
For "Where to Buy" information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

## Assembly Instructions

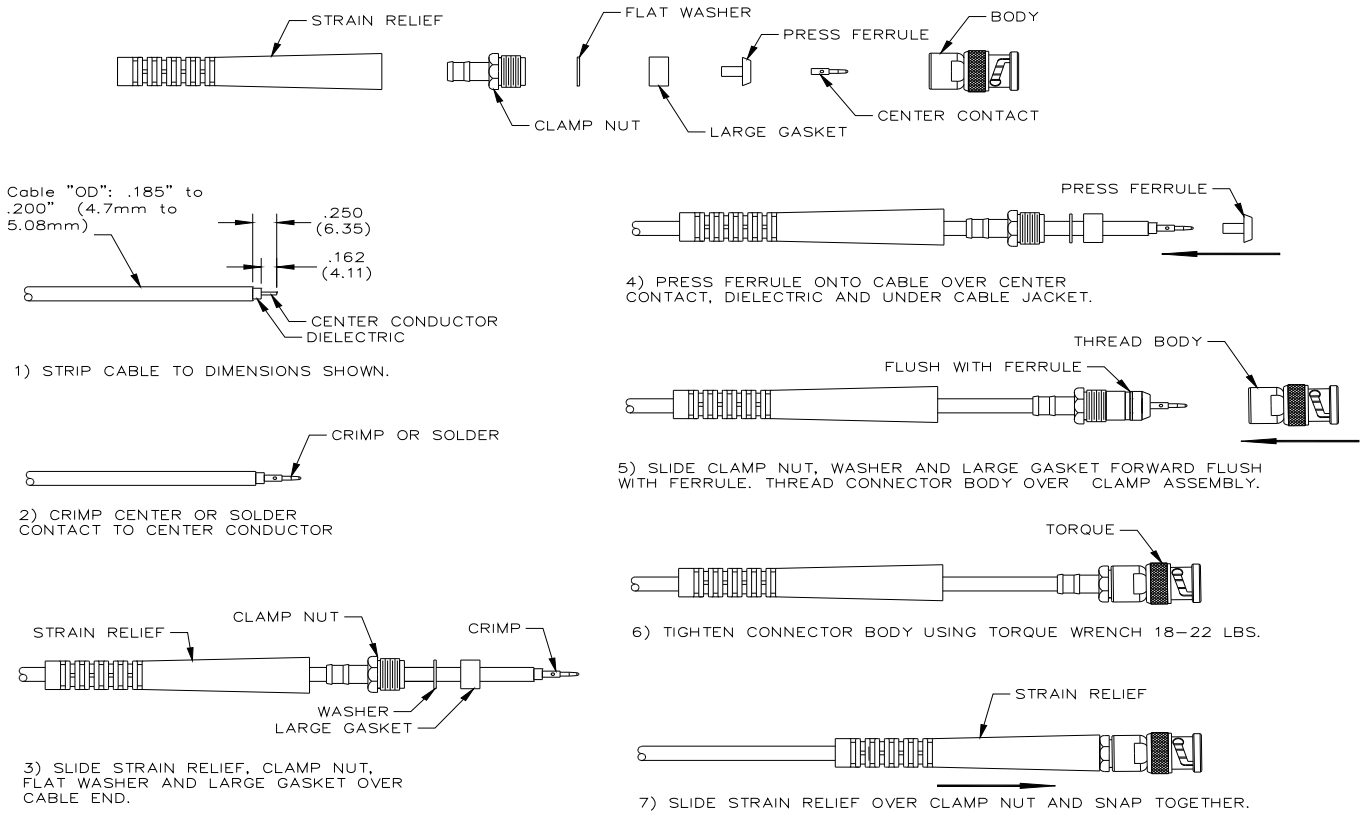

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Assistance: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
 For "Where to Buy" information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:*

*Click to view products by [Pomona](#) manufacturer:*

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [M3933/25-36N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [7325-1512-000](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [7406-1521-005](#) [8527](#) [8547](#) [FS11V](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL71-9](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#)