


Product: 一体成型电感

Series: 0603

Dimension: [Unit: mm]

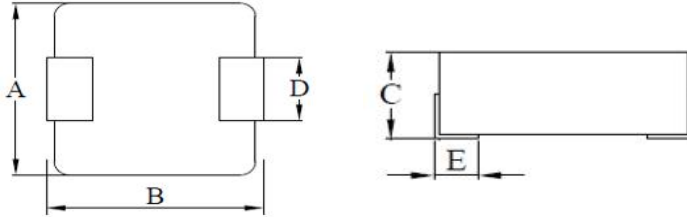

0603 系列	Dimensions (mm)
A	6.6±0.3
B	7.1±0.3
C	3.0MAX
D	3.0±0.5
E	1.6±0.5
MPQ	1000PCS

GENERAL SPECIFICATIONS:



P/N	感值 (L)	DCR		温升电流 (I _{rms})	饱和电流 (ISAT)
	μH	mΩ		A	A
	±20%	typ.	Max.	Typ.	Typ.
PSPMAA0603-R22M-ANP/F	0.22	2.5	2.8	23.0	40.0
PSPMAA0603-R33M-ANP/F	0.33	3.5	3.9	20.0	30.0
PSPMAA0603-R47M-ANP/F	0.47	4.0	4.2	17.5	26.0
PSPMAA0603-R68M-ANP/F	0.68	5.0	5.5	15.5	25.0
PSPMAA0603-R82M-ANP/F	0.82	6.7	8.0	13.0	24.0
PSPMAA0603-1R0M-ANP/F	1.00	9.0	10.0	11.0	22.0
PSPMAA0603-1R5M-ANP/F	1.50	14.0	15.0	9.0	18.0
PSPMAA0603-2R2M-ANP/F	2.20	18.0	20.0	8.0	14.0
PSPMAA0603-3R3M-ANP/F	3.30	28.0	30.0	6.0	13.5
PSPMAA0603-4R7M-ANP/F	4.70	37.0	40.0	5.5	10.0
PSPMAA0603-6R8M-ANP/F	6.80	54.0	60.0	4.5	8.0
PSPMAA0603-8R2M-ANP/F	8.20	70.0	90.0	4.0	7.5
PSPMAA0603-100M-ANP/F	10.00	102.0	105.0	3.0	7.0

备注:

- ◎ 测试频率:100kHz/1V
- ◎ 测试数据基于环境温度25°C取得
- ◎ 加载饱和电流 (ISAT) 会使电感量下降大约35%
- ◎ 加载温升电流 (I_{rms}) 会使电感量温度上升大约40°C (上升温度+初始温度=电感最终承受温度)
- ◎ 工作电流 (IDC) 取值于温升电流 (I_{rms}) 与饱和电流 (ISAT) 二者最小值
- ◎ 电感工作环境温度: -40°C~125°C, 产品最终承受温度不得高于125°C
- ◎ 系列规格书只用于电感一般特性的参考, 产品适用场景及更详细的参数请向我司索取单颗产品的规格书

PROD TECHNOLOGY CO., LTD.

TEL :0755-86667379

<http://www.prodtech.cn>



E-LIVEN TECHNOLOGY CO., LTD.

NO.28 ho-cheng RD,bade city,taoyuan,
taiwan

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [PROD Technology](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)