


# SMD COMMON MODE CHOKE COILS

SCM2012F-I Series (SHIELDED)

## ■ Mechanical Dimensions (Unit: mm)

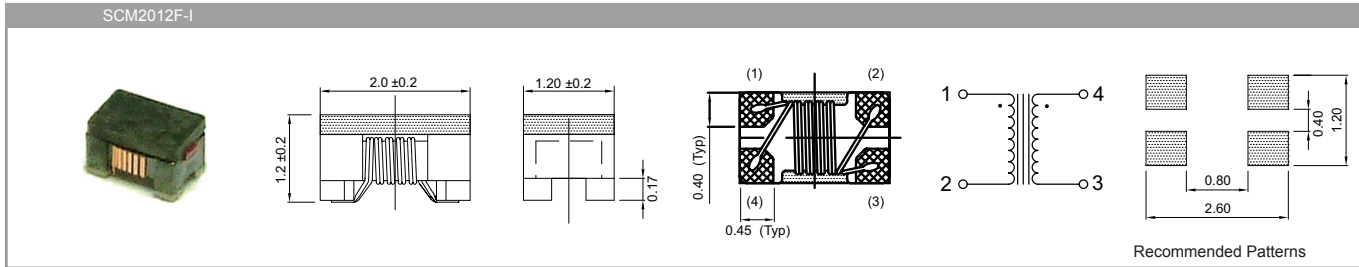

## ■ Electrical Specification

Part Number	Impedance @100MHz (Ω)	Rated Current (mA)	DCR (Ω) Max.	Rated Voltage (Vdc)	Withstand Voltage (Vdc)	Insulation Resistance @125VDC (MΩ) Min.
SCM2012F-670M-I-LRH	67	400	0.25	50	125	10
SCM2012F-900M-I-LRH	90	330	0.35			
SCM2012F-121M-I-LRH	120	370	0.30			
SCM2012F-181M-I-LRH	180	330	0.35			
SCM2012F-261M-I-LRH	260	300	0.40			
SCM2012F-371M-I-LRH	370	280	0.45			
SCM2012F-601M-I-LRH	600	240	0.60			

- a. Tolerance : M=±20%
- b. Small size, low profile.
- c. Various common mode impedance from 67Ω to 600Ω.
- d. Operating Temp. : -40°C to +125°C


- e. Storage temperature : -40°C to +125°C
- f. Temperature rise : 15°C
- g. Impedance measured using the HP4291B RF Impedance Analyzer.
- h. DCR measured using the 16502 milli-ohm meter.

## ■ Applications

- » Common mode noise suppression of signal lines in high speed and high-density digital equipment such as personal computers and peripherals.
- » Suitable for differential signal line such as USB2.0, IEEE1394 and LVDS, Capable of high speed signal transmission without distortion due to its high coupling.

## ■ Characteristic Curve

- SCM2012F-I

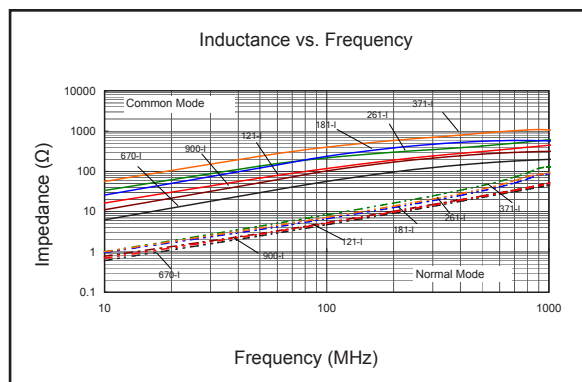

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [Prosperity](#) manufacturer:*

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)  
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [B2013FNLT](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#)  
[UALSC1520JH000](#) [UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS200290](#) [UALW21HS072450](#)  
[UALSU9HF050500](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#)  
[2752045447](#) [CMS3-11-R](#) [7351V](#) [7408-RC](#) [CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [DLW44SN101SK2L](#) [FE2X10-4-2NL](#)  
[744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#) [CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#)  
[7446630047](#)