



SlimLine spanners. Hands-on tools. CrV steel drop forged.

8-piece SlimLine-open-end spanner set, including holder. To DIN 3110 and ISO 3318.

Carefully hardened and plated. With clearly readable sizes.



Includes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19 and 20 x 22mm. Supplied with a plastic holder with slot for each spanner and holes for attaching to a wall. All spanners clearly labelled to make them easy to find.

NO 23 800 set


- Optimal surface protection by means of double nickel-plating and single chrome-plating. With easy to hold, smooth finish.
- With durable laser inscribed and clearly readable sizes in mm.
- Polished heads: slim and thin walled. Torque characteristics still exceed DIN/ISO requirements.
- Dimensional tolerances are better than those required by DIN/ISO. Each piece is calibrated and checked.



**10 YEAR
GUARANTEE!**

For full
professional use!

**DIN
ISO**

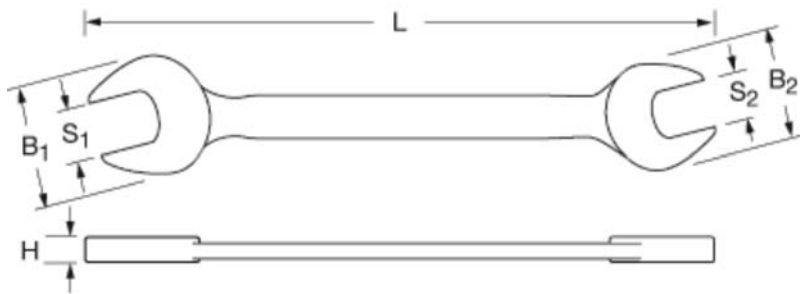

SlimLine-open-end spanners, individually

NO	S1 x S2	B1	B2	L	H
23 828	5 x 5.5mm	13	14	111	3.0
23 830	6 x 7mm	16	18	123	3.4
23 832	8 x 9mm	20	22	140	3.5
23 834	10 x 11mm	24	26	157	4.5
23 836	12 x 13mm	28	29	173	4.7
23 838	10 x 13mm	24	29	174	4.7
23 840	14 x 15mm	32	34	190	5.5
23 842	16 x 17mm	36	38	205	6.0
23 846	18 x 19mm	38	42	220	6.5
23 848	17 x 19mm	38	42	220	6.5
23 850	20 x 22mm	43	46	235	7.5
23 852	21 x 23mm	45	48	248	7.5
23 856	24 x 27mm	49	55	268	8.5
23 860	30 x 32mm	59	64	302	9.5
23 864	34 x 36mm	65	79	320	10.0
23 866	41 x 46mm	86	95	415	15.0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Spanners](#) category:

Click to view products by [Proxxon](#) manufacturer:

Other Similar products are found below :

[74008](#) [1406504-3](#) [1406504-4](#) [1406504-5](#) [1725859-2](#) [9965](#) [1055267-1](#) [1-1406504-0](#) [TG70-24](#) [TG70-18](#) [R282320031](#) [1055512-1](#) [1055276-1](#)
[R282303020](#) [TOL-222901](#) [523200-4](#) [TOL-171801](#) [1490262-2](#) [9968](#) [1302340394](#) [AC24VS](#) [R282340000](#) [BT-BS-609WT](#) [BT-BS-610R](#) [BT-](#)
[BS-610RT](#) [R282320030](#) [BT-ST-302D](#) [1031-27R](#) [1031-34R](#) [1060-29](#) [1067-10](#) [1067-27](#) [1067-32](#) [1071-48](#) [10F0-26P](#) [10F0-32P](#) [10F0-55P](#) [0-](#)
[90-947](#) [0-90-949](#) [40080606](#) [40082626](#) [40093232](#) [50184065](#) [58211008](#) [58211011](#) [58211013](#) [58211014](#) [58211015](#) [58211016](#) [58211019](#)