



Technical data // **SMC-D 131 AK LS 2**

Dual Push Button Switches

Dual push button switch



Highlights

Contacts with abrasion resistant hard gold plating

100 % electronic final inspection and testing

Mechanical Data

Width	7.62 mm
Perm. ambient temperature	-20 °C ... +80 °C
Mechanical lifetime	1.000.000 steps
Operating force	approx. 4.0 N
Weight	approx. 4.0 g
Digit height 10-digit	4.9 mm
Digit height 16-digit	3.4 mm
Click action	marked
Sinus-vibration testing	acc. EN 60068-2-6
Shock testing	acc. EN 60068-2-27

Electrical Data

Operating voltage	≤ 40.0 V
Contact load, dynamic (resistive)	≤ 100.0 mA
Contact load, static	≤ 1.0 A
Contact resistance for PCB AK (measured from supply line to output)	< 100.0 mOhm

Material

Housing	PPO
Contact surface	Au over Ni on Cu
Sliding contact	Au over Ni on CuSn6




Technical data

// SMC-D 131 AK LS 2

Dual Push Button Switches

Dual push button switch

Technical Drawing

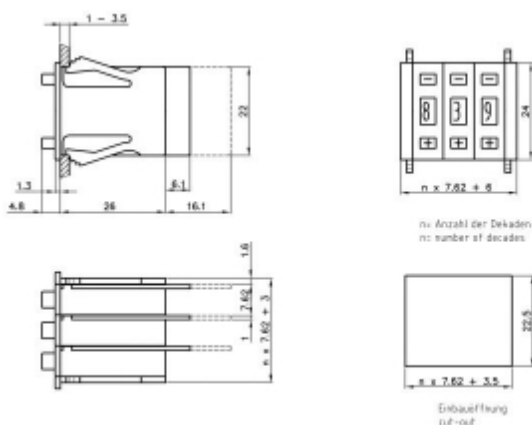

Configuration

Codes

Code 131

BCD					
	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●	●			●

BCD, 10




Technical data

// SMC-D 131 AK LS 2

Dual Push Button Switches


Dual push button switch

PCB

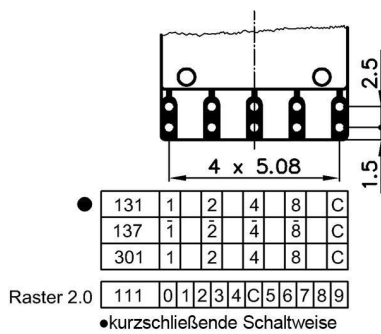

Short

Suffix

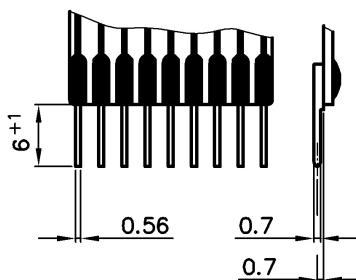

Solder pins for PCB

Colour

Housing black, drum black,
digits white

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for PTR HARTMANN manufacturer:

Other Similar products are found below :

[B5LS](#) [DA-PT659.6/19](#) [DA-PT659.6/9.5](#) [DK-PT6510.5/15.7](#) [DK-PT6510.5/5.3](#) [P25SMJ103](#) [P25SMJ301](#) [P25SMJ801](#) [P25SMT101](#)
[P25SMT103](#) [P25SMT103TR](#) [P25SMT303](#) [P25SMT803](#) [P36SMT101](#) [P36SMT103](#) [P36SMT106](#) [P36SMT301](#) [P36SMT303](#) [P36SMT801](#)
[P36SMT803](#) [P36THR101](#) [P36THR101L254](#) [P36THR102L254](#) [P36THR103](#) [P36THR106](#) [P36THR301L254](#) [P60ASMT103](#) [P60ASMT106](#)
[P60ASMT701](#) [P60ATHR101](#) [P60ATHR101V](#) [P60ATHR103V](#) [P60ATHR701](#) [P65SMT101](#) [P65SMT103](#) [P65SMT106](#) [P65SMT701](#)
[P65SMT703](#) [P65THR101](#) [P65THR101L254](#) [P65THR102](#) [P65THR103L254](#) [P65THR106](#) [P65THR106L254](#) [P65THR701](#) [P65THR701L254](#)
[P65THR703](#) [P65THR703L254](#) [P65THR706](#) [PT65101](#)