SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED VOLTAGE (SQUARE WAVE)	5	Vp-p	
OPERATING VOLTAGE RANGE	4 ~ 6	Vp-p	
RATED CURRENT (MAX)	80	mA	
COIL RESISTANCE	30 ± 5	OHM	
MINIMUM SPL @ 10 CM	80	dBA	
RESONANT FREQUENCY	2,400 ± 200	Hz	
OPERATING TEMPERATURE	-40 ~ +85	°C	
STORAGE TEMPERATURE	-50 ~ <b>+</b> 95	°C	
HOUSING MATERIAL	LCP	-	
TERMINAL MATERIAL	Sn PLATED BRASS	-	
WEIGHT	0.6	grams	

1. ALL DIMENSIONS ARE IN MILLIMETERS.


3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

WITHOUT NOTICE.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA PROPRIETARY
TO PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED,
INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	3/29/2007		
Α	REVISED MINIMUM SPL @ 10cm	5/16/2007	R.W.	
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	11/5/2007	B.R.	

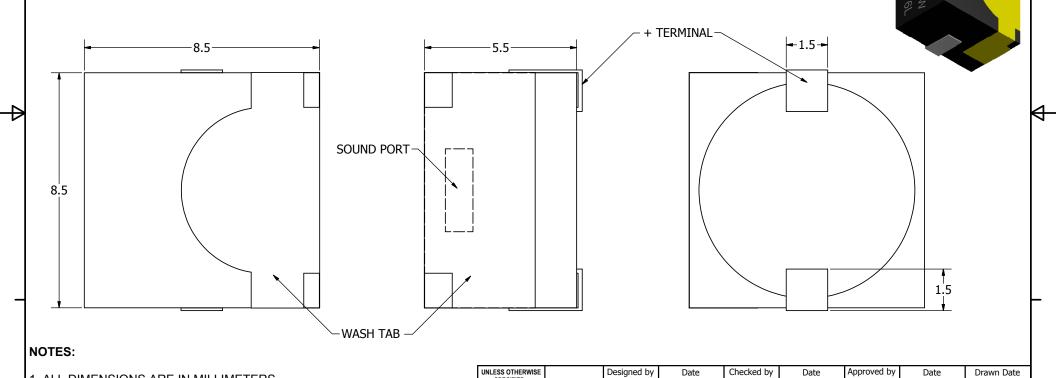

SPECIFIED:

DIMENSIONS ARE IN

MILLIMETERS,

TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

SMT-0824-SW-5V-R.idw

SIZE

3/29/2007

4/2/2007

R.W.

Transducer (Electro-Mech)

SMT-0824-SW-5V-R

4/2/2007 11/5/2007

1/1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 BF-9778-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF 02094 02097 GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG410-HD1Z-FC-AGZ-ZW A-10-6-BG410-HD1Z-GA-M4Z-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW