


CX2047LNL

- RF TRANSFORMER, 1:4CT
- 0.5-300 MHz
- IMPEDANCE = 50 OHMS
- SURFACE MOUNT

NOTES: UNLESS OTHERWISE SPECIFIED:

1. OPERATING TEMPERATURE: -40°C TO +85°C
2. STORAGE TEMPERATURE: -50°C TO +125°C
3. SURFACE MOUNT, FR4 SUBSTRATE
4. JEDEC MOISTURE SENSITIVITY LEVEL 1
5. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCE:
.XX= ±.02
.XXX= ±.010
6. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: CX2047LNLT
7. ROHS COMPLIANT



ELECTRICAL SPECIFICATIONS: @ 25°C


RETURN LOSS:

FREQUENCY	RETURN LOSS	FREQUENCY	RETURN LOSS
.5 MHz	-17 dB MIN	100 MHz	-25 dB MIN
1 MHz	-20 dB MIN	150 MHz	-21 dB MIN
10 MHz	-29 dB MIN	200 MHz	-18 dB MIN
50 MHz	-28 dB MIN	250 MHz	-16 dB MIN
70 MHz	-27 dB MIN	300 MHz	-14 dB MIN

INSERTION LOSS:

FREQUENCY	ATTENUATION	FREQUENCY	ATTENUATION
100 KHz	-4 dB MAX	500 MHz	-3 dB MAX
.5 MHz	-1 dB MAX		
1.5 MHz	-0.5 dB MAX	*REFERENCE	ATTENUATION
100 MHz	-0.5 dB MAX	12.28 MHz	-.85 dB MAX TO -.2 dB MIN
300 MHz	-1 dB MAX		

MECHANICAL SPECIFICATIONS:

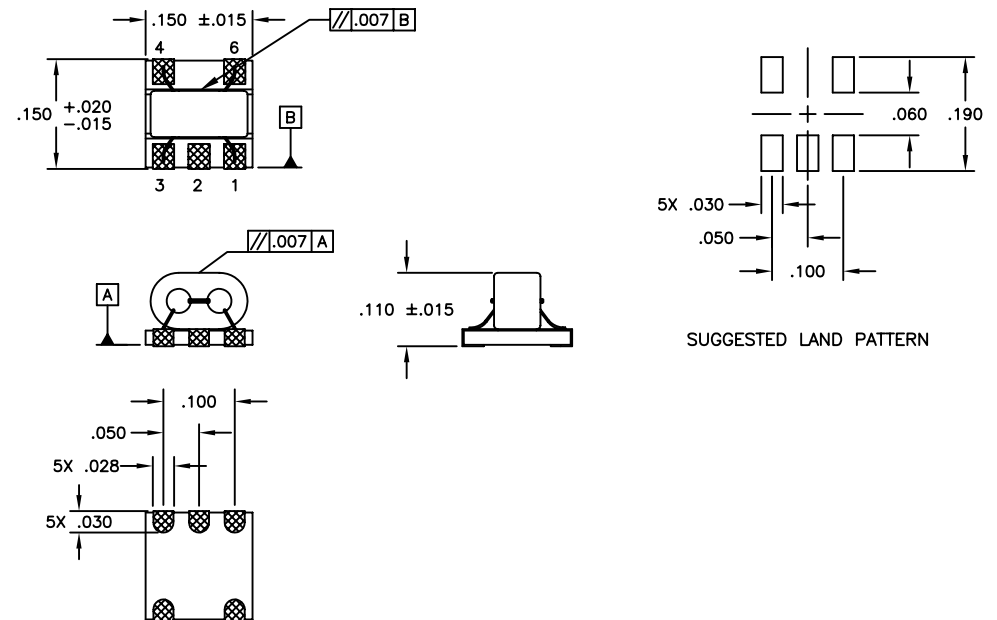

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (01/07/14)

PULSE CONFIDENTIAL
&
PROPRIETARY

PRODUCT SPECIFICATION:
XFMR, RF, SGL, RAC, 1:4CT, 0.5-300MHz

DWG. NO./ PART NO.	SHEET:	REV.
CX2047LNL	1	M15

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#)