

ISM 900MHz Helical SMD-Antenna

Ground cleared under antenna, clearance area 6.00 x 11.00 mm. Pulse Part Number: W3112A



Features

- Vertical mount on board
- Compact size WxLxH (2.5 x 8 x 8 mm)
- Low weight (390 mg)
- Lead Free materials
- Fully SMD compatible
 - Glue needed between antenna and PWB
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

Applications

- 900MHz ISM Band Systems
- Engineering samples available*

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

ISM 900MHz

Typical performance (testboard size 100 x 40 mm, PWB ground clearance area 6.00 x 11.00 mm)

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
902 – 928	0.9 (peak) -0.3 (band edges)	67 / -1.7 (peak) 50 / -3 (band edges)	-10	50	-40 to +85

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas




ISM 900MHz Helical SMD-Antenna

Ground cleared under antenna, clearance area 6.00 x 11.00 mm. Pulse Part Number: W3112A

Typical Electrical Characteristics (T=25 °C)

Typical Return Loss S11/ impedance, measured on the 100 x 40 mm test board with matching circuit



Dualband WLAN


3 Aug 2006 12:15:23

CH1Markers

- 1. -10.616 dB 902.000 MHz
- 2. -11.740 dB 928.000 000 MHz

CH1 S11 LOG

5 dB/REF 0 dB

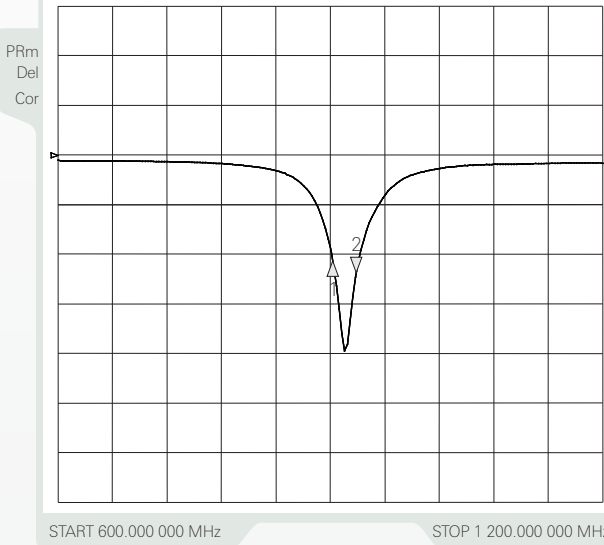


Dualband WLAN

3 Aug 2006 12:22:57

- 1. 92.414 Ω 0.4141 Ω 902.000 MHz
- 2. 29.924 Ω -3.8193 Ω 44.904 pF
- 928.000 000 MHz

CH1 S11 1 U FS

PRm Del Cor

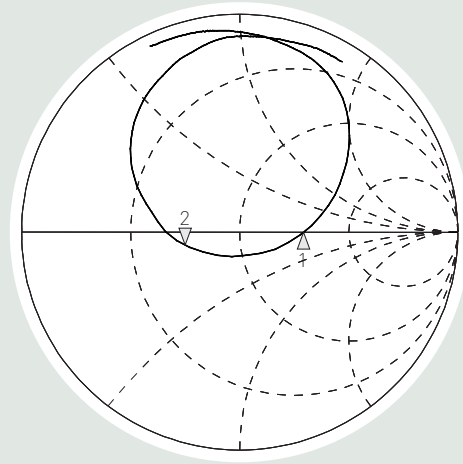


START 600.000 000 MHz


STOP 1 200.000 000 MHz

Free space efficiency and maximum gain, PWB ground clearance area 6.00 x 11.00 mm

ISM 900 MHz Ver Helical Antenna

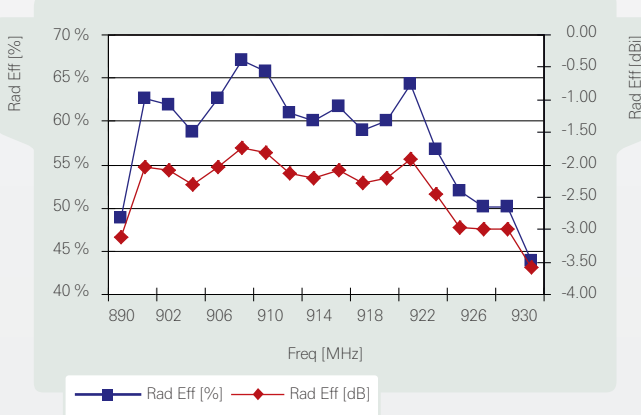

ISM 900 MHz Ver Helical Antenna

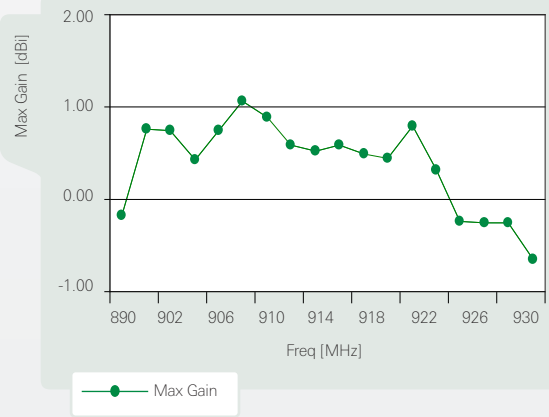

Pulse Finland Oy





Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



ISM 900MHz Helical SMD-Antenna

Ground cleared under antenna, clearance area 6.00 x 11.00 mm. Pulse Part Number: W3112A

Typical Free space Radiation Patterns

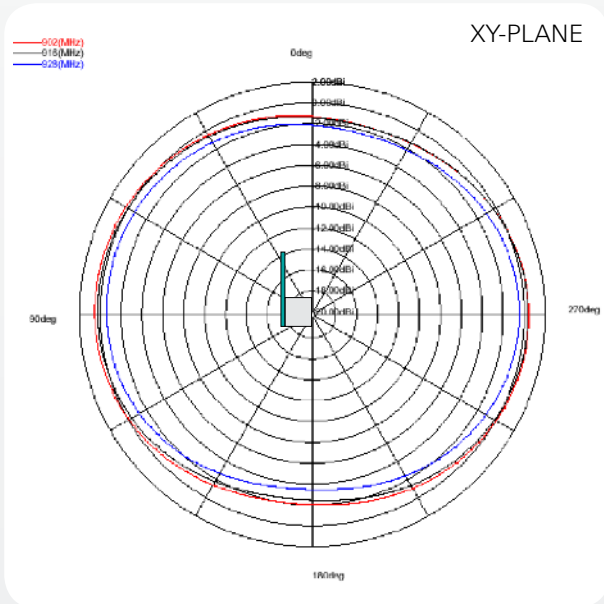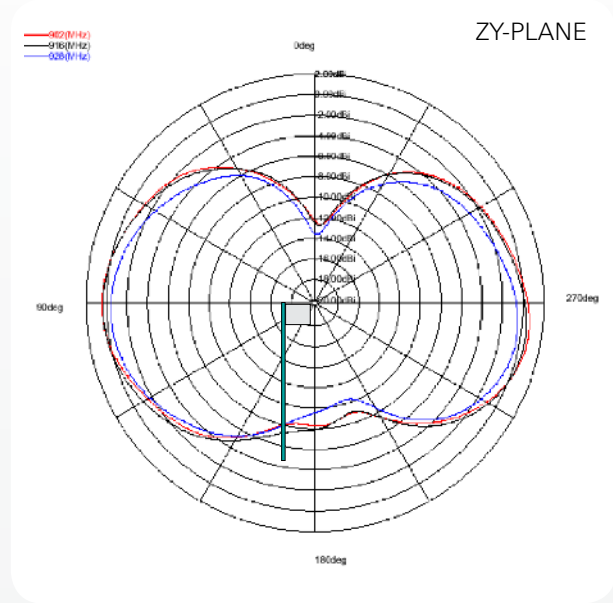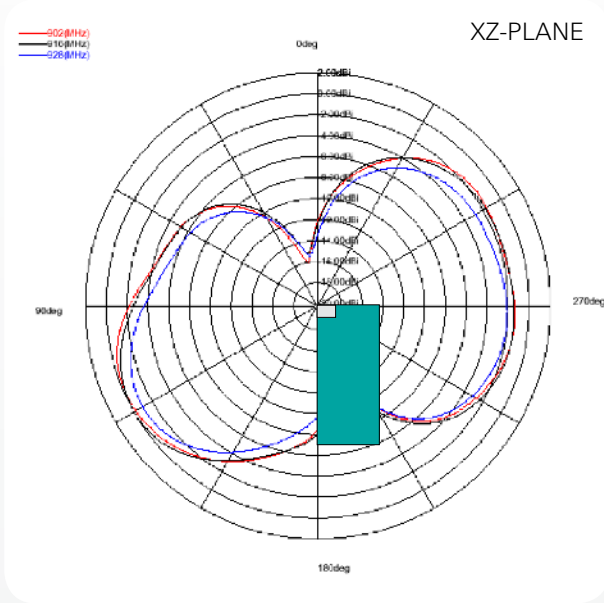

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antenna Development Tools](#) category:

Click to view products by [Pulse](#) manufacturer:

Other Similar products are found below :

[0868AT43A0020-EB1SMA](#) [EVALBGSA141MN10TOBO1](#) [A10393-U1](#) [PCSD.06.A](#) [B5771-U1](#) [WLAD.10](#) [NCSD.5820](#) [KIT-WIFI-ISM-01](#)
[EB_NN01-105B](#) [EB_NN01-105A](#) [EB_NN02-201-5G](#) [MIKROE-4063](#) [AEK-403-SP](#) [A10192-U1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#)
[W3095-K](#) [W3070-K](#) [W3011A-K](#) [W3010-K](#) [W3008C-K](#) [LORA-K](#) [ISM-K](#) [A10472-U1](#) [REFLECTOR-EVB-1](#) [A10340-U1](#) [ACAG0201-](#)
[2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#)
[ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#)
[ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [A10194-U1](#) [A10204-U1](#) [A5645H-EVB-1](#) [A5645-U1](#) [A5839-U1](#) [A5887H-EVB-1](#) [A6111-](#)
[U1](#) [M20047-EVB-1](#) [M20057-EVB-1](#)