




Page 1 of 10

GNSS patch antenna

W3216

1.57542GHz / 1.598-1.606GHz


Series: ANTENNA

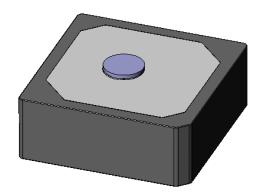

All dimensions are in inches (mm)

Issue: 1444

In the effort to improve our products, we reserve the right to make changes judged to be necessary. ${\tt CONFIDENTIAL}$ AND PROPRIETARY INFORMATION



FM50039 Rev 0, 5/2/2013







Page 2 of 10

GNSS patch antenna


W3216


1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

*) Typical performance (measured on 50x50mm ground plane)

<u>E</u>	LECTRICAL SPECIFICATIONS *)	
Frequency	1.57542 / 1.598-1.606	GHz
Nominal Impedance	50	Ω
RHCP Zenith Gain @ 1.57542GHz	-2	dBic
RHCP Zenith Gain @ 1.598-1.606GHz	-2	dBic
Combined Zenith Gain @ 1.57542GHz	2	dBi
Combined Zenith Gain @ 1.598-1.606GHz	2	dBi
Efficiency @ 1.57542GHz	60	%
Efficiency @ 1.598-1.606GHz	60	%
Polarization		RHCP

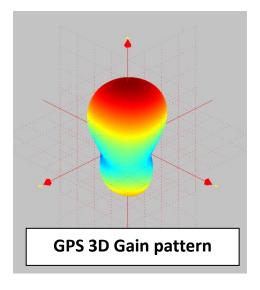

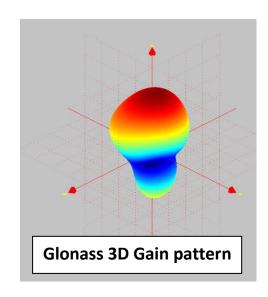

Issue: 1444

ROHS





Page 3 of 10


GNSS patch antenna

1.57542GHz / 1.598-1.606GHz

W3216

Series : ANTENNA

Antenna Dimensions

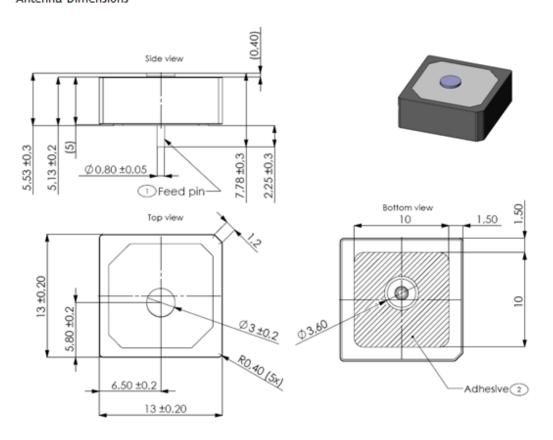

No.	Item	Description	
1	Feed pin	Silver plated brass	
2	Adhesive	0.13 mm thick double sided tape	
No. 1			

Feed pin manual soldering conditions:

- 300°C max soldering iron temperature, 5 seconds max

- Typical lead free solders are applicable

Electrode silver metallization may tarnish if antenna is stored / used in corrosive environment especially where chloride, sulphur or sulfide, alkali or acid salts exist in the air. Corrosive gases may cause oxidation of electrodes and reduce solderability

Issue: 1444

ROHS





Page 4 of 10

GNSS patch antenna

W3216

1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

MECHANICAL SPECIFICATIONS

Color Grey

Size (WxLxH) 13x13x5 mm

RoHS Compliance Yes

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40...+85 °C

TRAY PACKING SPECIFICATIONS

100pcs antennas per tray

17pcs trays per box

one empty tray per box

1600pcs antennas per box

Box size 520*368*264mm

Issue: 1444

COMPLIAN





Page 5 of 10

GNSS patch antenna


W3216

1.57542GHz / 1.598-1.606GHz


Series: ANTENNA

Charts

(Return Loss)

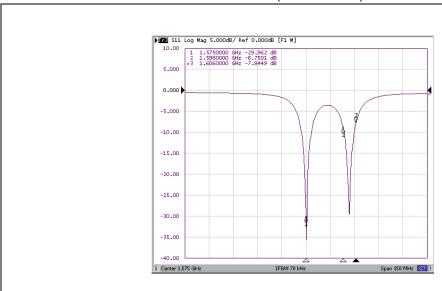

(Impedance)

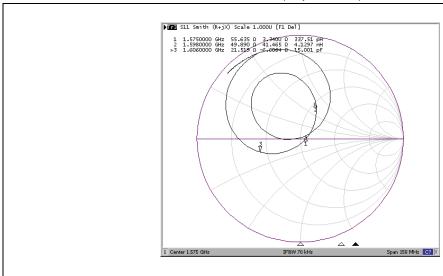

Issue: 1444

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden





Page 6 of 10


GNSS patch antenna

W3216


1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

(Free space Efficiency)

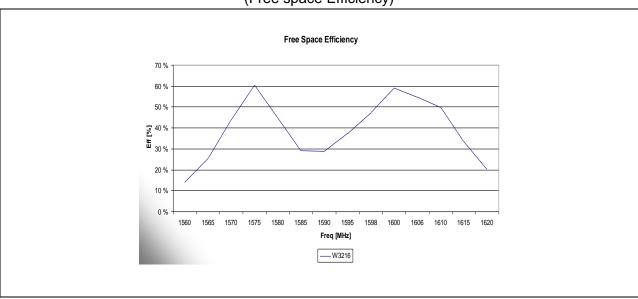

(Free space RHCP gain)

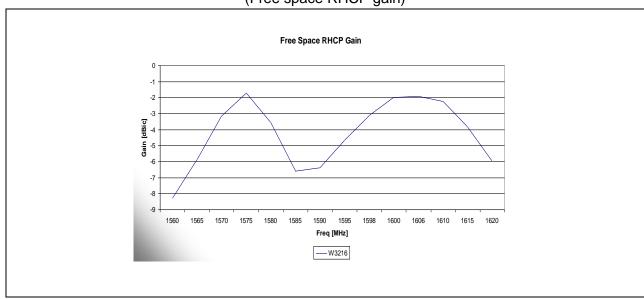

Issue: 1444

ROHS





Page 7 of 10


GNSS patch antenna

1.57542GHz / 1.598-1.606GHz


W3216

Series : ANTENNA

(GPS Elevation plane combined gain)

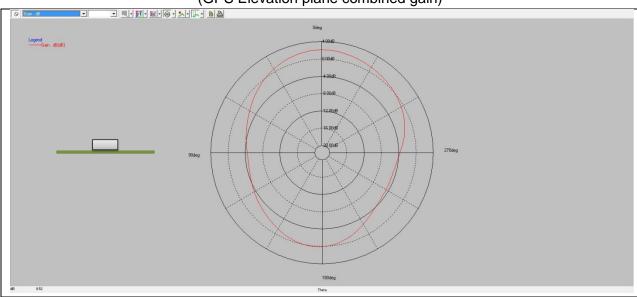

(GPS Azimuth plane combined gain, conical 45degree)

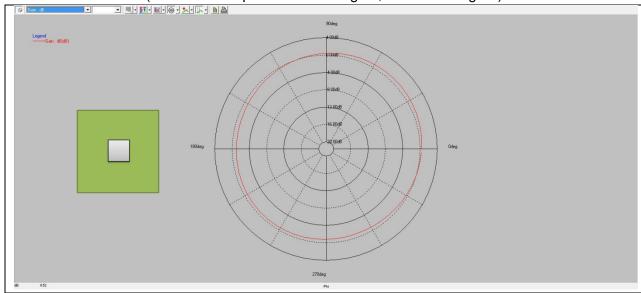

Issue: 1444

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden





Page 8 of 10


GNSS patch antenna

W3216


1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

(GPS Elevation plane RHCP gain)

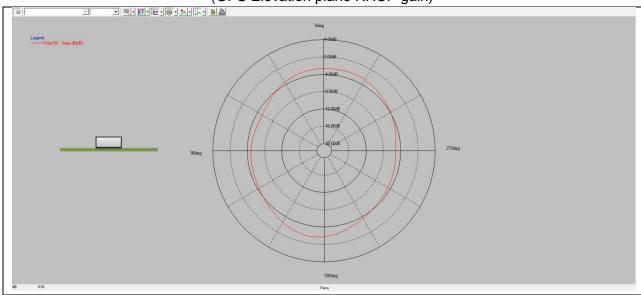

(GPS Azimuth plane RHCP gain, conical 45degree)

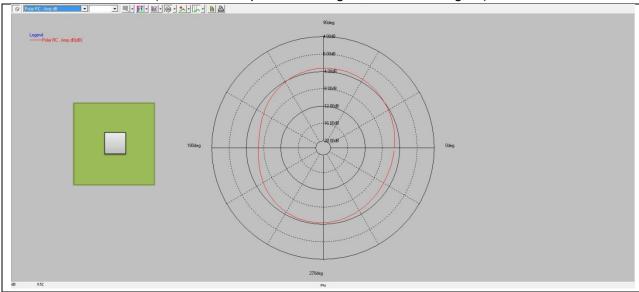

Issue: 1444

ROHS





Page 9 of 10


GNSS patch antenna

W3216


1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

(Glonass Elevation plane combined gain)

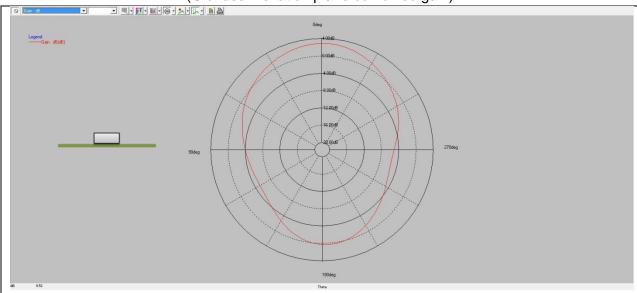

(Glonass Azimuth plane combined gain, conical 45degree)

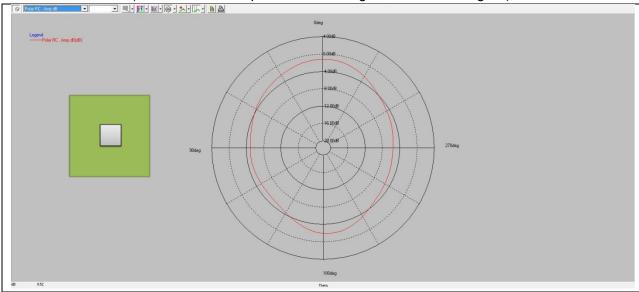

Issue: 1444

ROHS





Page 10 of 10


GNSS patch antenna

W3216


1.57542GHz / 1.598-1.606GHz

Series: ANTENNA

(Glonass Elevation plane RHCP gain)

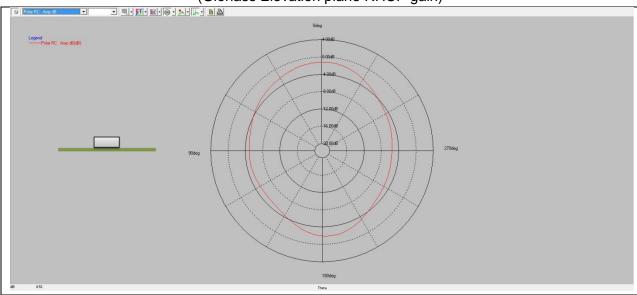

(Glonass Azimuth plane RHCP gain, conical 45degree)

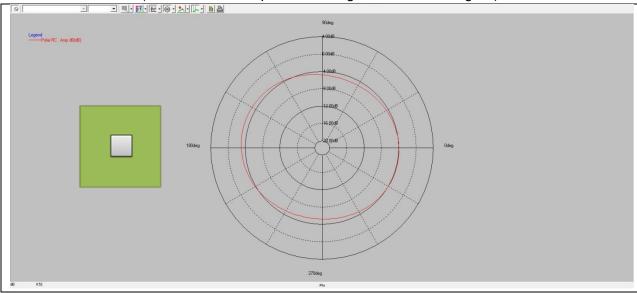

Issue: 1444

COMPLIANT

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Pulse manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352 MIKROE-2350