

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX



Features:

- 2G / 3G / 4G Div Ant for MiMo
- Used as pair for W3906B0100
- Can be used as Primary antenna
- 698-3600MHz
- Global LTE Bands:
 - B1-B23, B25-B29, B33-B42
 - N.A.; Europe, Asia (incl. Jap.)
- · Foldable for tight spaces

Applications:

- Challenging RF Environments
 Demanding:
 - Highest Peak Gain
 - Lowest ECC (Envelope Correlation Coeff.).
- Matched to Radio Modules from:
 - Sierra Wireless, Quectel, Telit, Huawei, Gemalto, uBlox, ZTE, and others.
- Security, Video, Graphics
- IoT, SmartGrid, Meters, Remote Monitoring, Sensor Networks



In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

All dimensions are in mm / inches

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



1

Pulse LARSEN Antennas A YAGEO Company

Description: LTE 698-3600MHz FPC Antenna


Series: Gemini

PART NUMBER: W3907XXXX

ELECTRICAL SPECIFICATIONS				
P/N	W3907B0100/ W3907B0127/ W3907BD0100	W3907BD0350		
Frequency	698-960/1427.9- 1510.9/1559- 1610/1695- 2200/2300- 2700/3400- 3600MHz	698-960/1427.9-1510.9/1559- 1610/1695-2200/2300- 2700/3400-3600MHz		
Return Loss(698-960MHz)	-6dB	-6dB		
Return Loss(1427.9-1510.9/1559- 1610/1695-2200/2300-2700/3400- 3600MHz)	-7.5dB	-7.5dB		
Average Total Efficiency(698-960MHz)	55%	49%		
Average Total Efficiency(1427.9- 1510.9MHz)	60%	48%		
Average Total Efficiency(1559-1610MHz)	60%	52%		
Average Total Efficiency(1695-2200MHz)	65%	48%		
Average Total Efficiency(2300-2700MHz)	70%	48%		
Average Total Efficiency(3400-3600MHz)	65%	40%		

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



2

Pulse **LARSEN** Antennas

Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

ELECTRICAL SPECIFICATIONS				
P/N	W3907B0100/ W3907B0127/ W3907BD0100	W3907BD0350		
Peak Gain(698-960MHz)	2.9dBi	1.0dBi		
Peak Gain(1427.9-1510.9MHz)	1.7dBi	1.1dBi		
Peak Gain(1559-1610MHz)	1.8dBi	1.4dBi		
Peak Gain(1695-2200MHz)	3.4dBi	2.2dBi		
Peak Gain(2300-2700MHz)	3.8dBi	2.0dBi		
Peak Gain(3400-3600MHz)	4.2dBi	1.4dBi		
Polarization	Linear	Linear		
Nominal Impedance	50ohm	50ohm		
Power Standing	3W	3W		

Typical free space performance measured on 2mm thickness PC plate

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



3



Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

MECHANICAL SPECIFICATIONS

Overall Length Antenna Color / Material Cable type Cable length 110.7X20.4mm BLACK FPC See table detail See table detaill

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature Storage Temperature RoHS Compliant -40~+85° C -40~+85° C Yes

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4




Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

MECHANICAL DRAWING

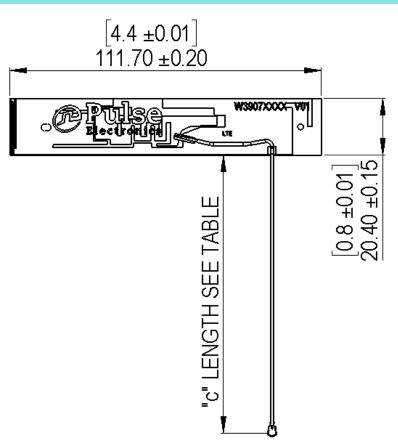

P.N	"C' LENGTH	CABEL TYPE	CONNECTOR TYPE
W3907B0100	100MM	AWG#32 1.13MM	Equivalent of I-PEX MHF
W3907BD0100	TOOMIN	AWG#36 0.81MM	Equivalent of I-PEX MHF4
W3907B0127	127MM	AWG#32 1.13MM	Equivalent of I-PEX MHF
W3907BD0350	350MM	AWG#36 0.81MM	Equivalent of I-PEX MHF4

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



5



Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Return Loss



Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Efficiency

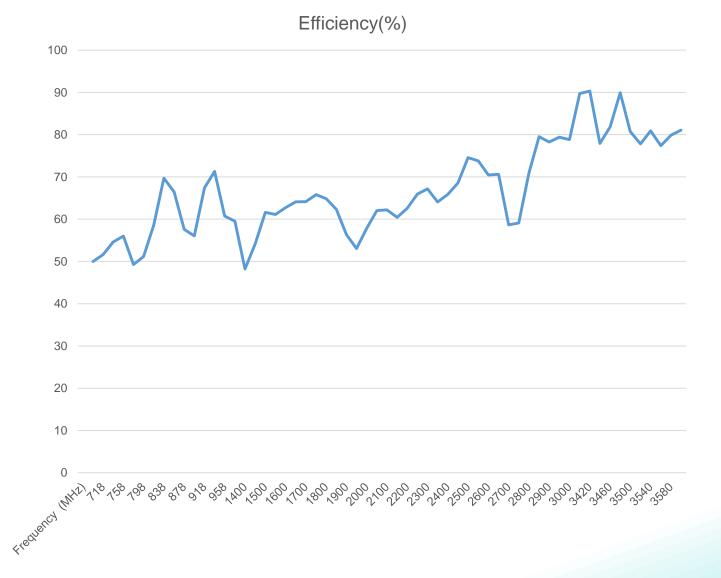

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



7



Description: LTE 698-3600MHz FPC Antenna


Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Peak Gain



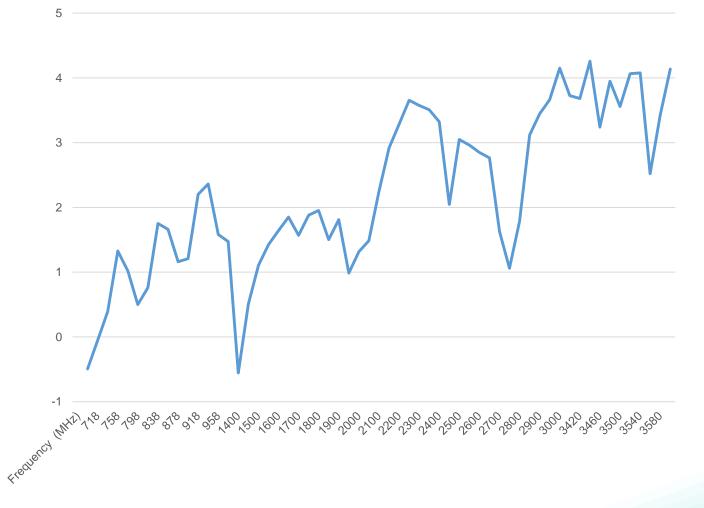

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8




Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 698-960MHz (800MHz)

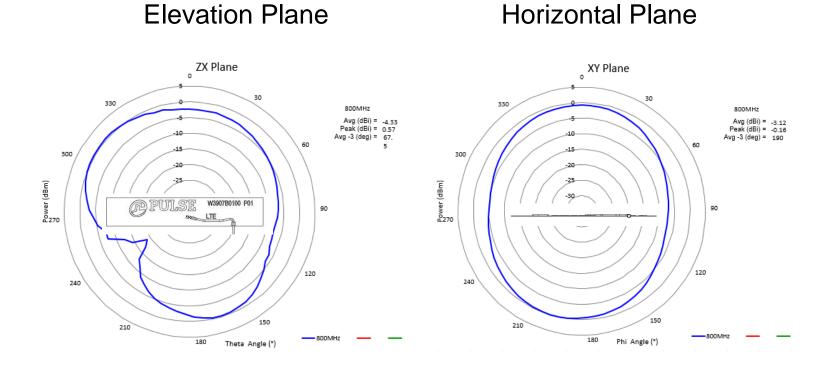

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

9



Description: LTE 698-3600MHz FPC Antenna

Series: Gemini


PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 1427.9-1510.9MHz (1450MHz)



Horizontal Plane

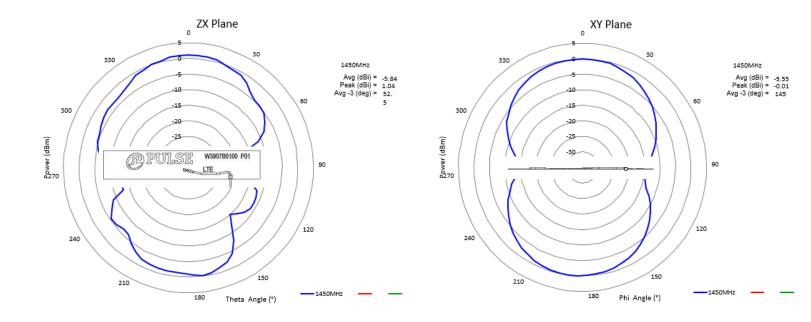

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: LTE 698-3600MHz FPC Antenna

Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 1559-1610MHz (1570MHz)

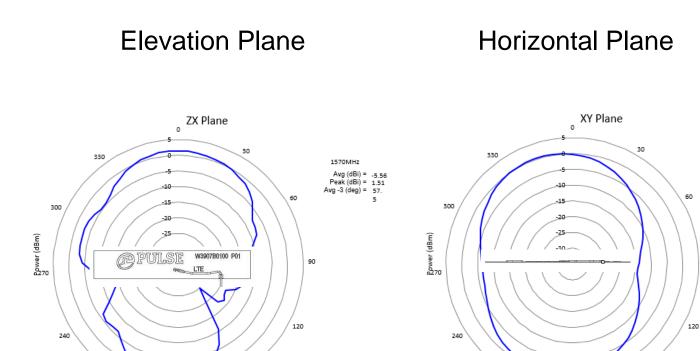

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

150

Theta Angle (°)

180

1570MHz

CONFIDENTIAL AND PROPRIETARY INFORMATION

210



1570MHz

90

1570MHz

150

Phi Angle (°)

180

210

Avg (dBi) = -4.69 Peak (dBi) = 0.47 Avg -3 (deg) = 150



Description: LTE 698-3600MHz FPC Antenna

Series: Gemini


PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 1695-2200MHz (1930MHz)

Elevation Plane

Horizontal Plane

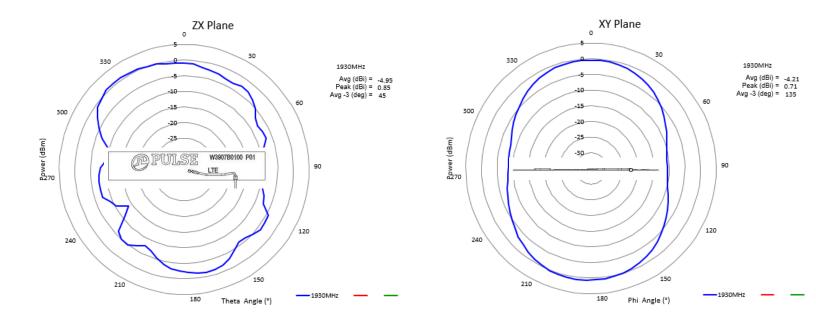

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: LTE 698-3600MHz FPC Antenna

Series: Gemini


PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 2300-2700MHz (2390MHz)

Elevation Plane

Horizontal Plane

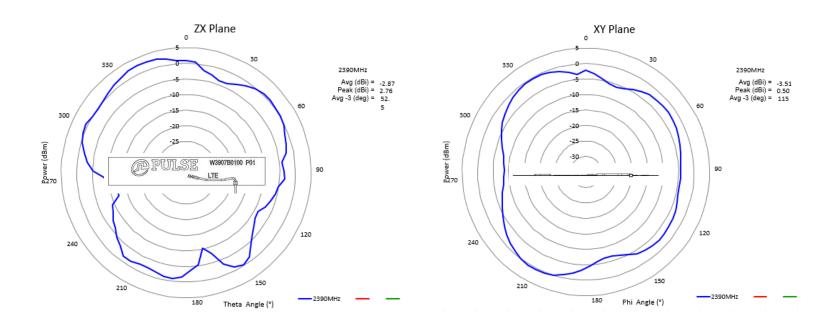

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION





Horizontal Plane

Description: LTE 698-3600MHz FPC Antenna


Series: Gemini

PART NUMBER: W3907XXXX

CHARTS

Typical free space radiation pattern 3400-3600MHz (3400MHz)

Elevation Plane

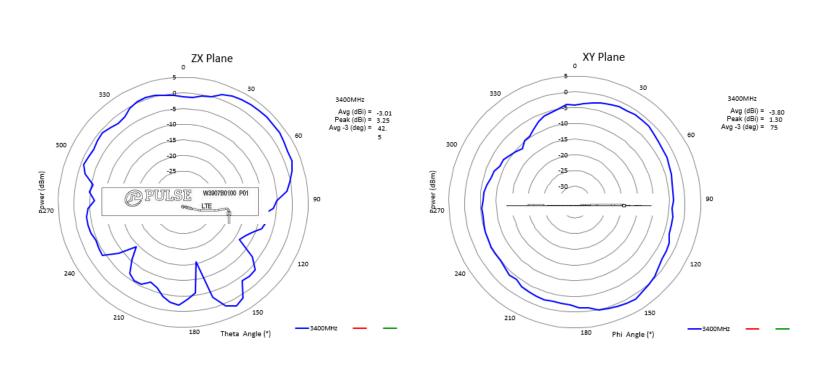

Note: Antenna tested on 2mm thickness PC plate with 100mm feed cable

Issue: 1907

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 14



Series: Gemini

Description: LTE 698-3600MHz FPC Antenna

PART NUMBER: W3907XXXX

PACKAGING

10pcs antenna per PE bag

10pcs PE bags per form bag

12pcs form bag per package box

- Total 1200pcs per package box
- Package box: 460mm*235mm*140mm

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



15

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pulse manufacturer:

Other Similar products are found below :

ICEFIN806DMN ICEFIN698/869DMN PH9085.011NL PE-0603CD060KTT PH9185.034NLT H1086NLT P0182T PA1494.442NL PE-0805CD030KTT PE-53363NLT 23Z106SM-T HX5400NL JXD0-4005NL ST6200QNL T3001NL HX2019 PE-67540NL PE-65968NL PE-65535NL T1142NLT H7019FNL P0841NL P0438T P0584 P0752.474T P1167.154T STQN1553-45 JY0-0016NL JG0-0098NL JG0-0025NL J20-0014NL W1911 HFB075100A HX6101NL JXD1-0025NL RO2408NMD P0469NL P0841SNLT PB2134NL ST2-12B42 PE-0805CM331JTT PE-51509NL 53119 J3026G01DNL 100B-1001XNL P0849SNL W3012-K HX5020NL HX5201NL PE-68210NL