

PulseLARSEN
Antennas

Series: Radome Omni

Description: RO, 5dBi, 860-930MHz, NF

PART NUMBER: RO8605NFC

Features:

- Omnidirectional antenna
- Gain 5dBi
- Polarization Vertical
- Connector N-female
- Length 812.4mm
- Power withstanding 50W
- IP67


Applications:

- 860-960MHz radios
- ISM 868 / 915MHz

All dimensions are in mm / inches

Issue:1651

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

ELECTRICAL SPECIFICATIONS

Antenna type Collinear dipole array

Frequency 860-930 MHz

Nominal Impedance 50Ω

VSWR 2:1

Gain 5 dBi

Efficiency 65 % Min

HPBW H-Plane 360 °

HPBW E-Plane 22 °

Polarization Vertical

ESD Protection DC Grounded

Power withstanding 50 W

Connector type N-Female





Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

MECHANICAL SPECIFICATIONS

Plastic radome Pultruded Fiberglass

Color White

Ingress Protection IP67

Weight 275 g

Wind-loading 201.2 kph (125 mph)

Antenna Length 812.4 mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40 to +85° C









Series: Radome Omni

PART NUMBER: RO8605NFC

MECHANICAL DRAWING

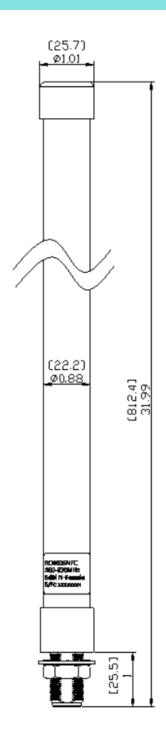

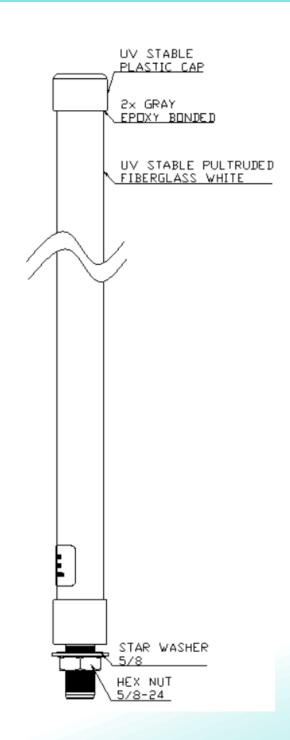






Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

S11 Parameter

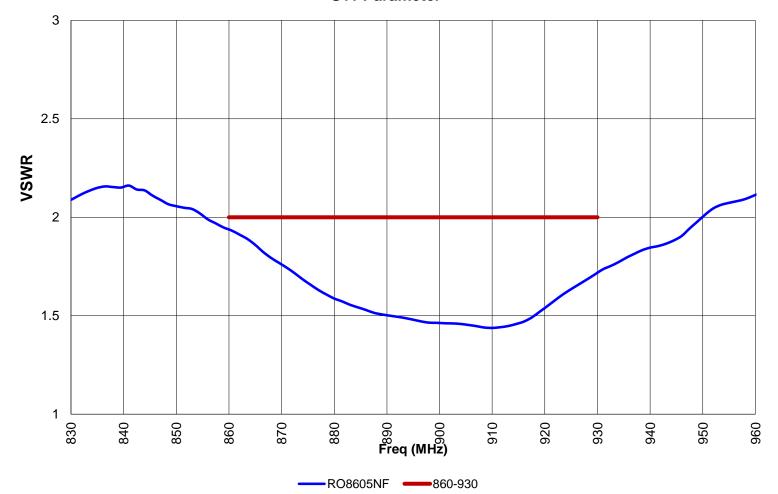








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

Peak Gain vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

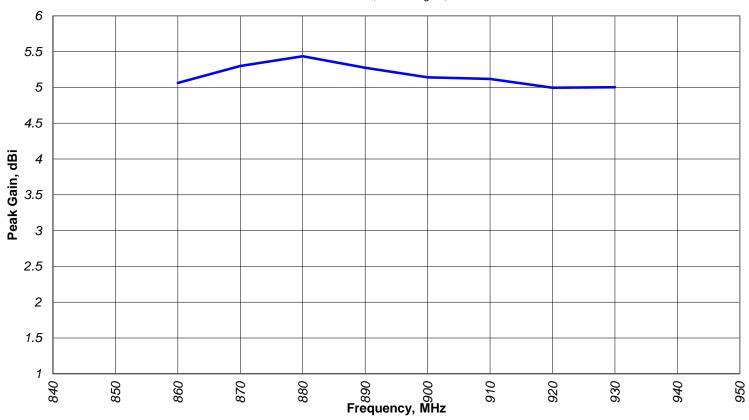

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

Efficiency vs Frequency RO8605NF

Measured at Pulse, USA - Aug 22, 2016

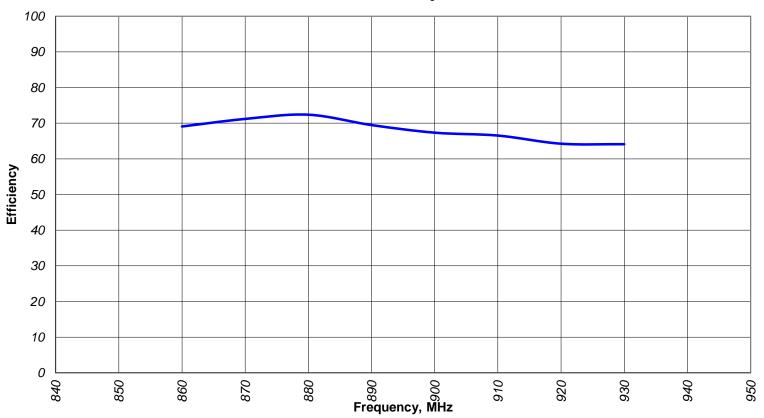

860-930








Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

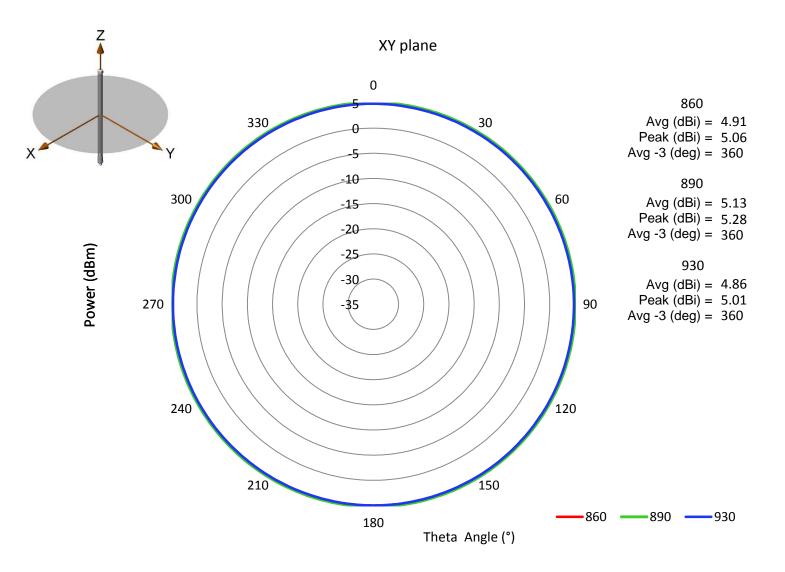






Series: Radome Omni

PART NUMBER: RO8605NFC

CHARTS

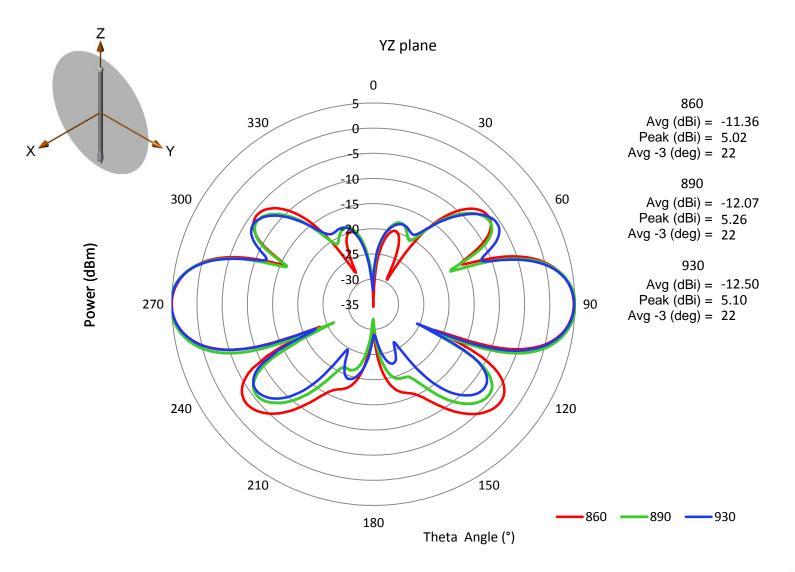



Description: RO, 5dBi, 860-930MHz, NF

Series: Radome Omni

PART NUMBER: RO8605NFC

PACKAGING

Pack each Antenna in PE bag, 40 sets in one carton box with one big PE bag

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352