


Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

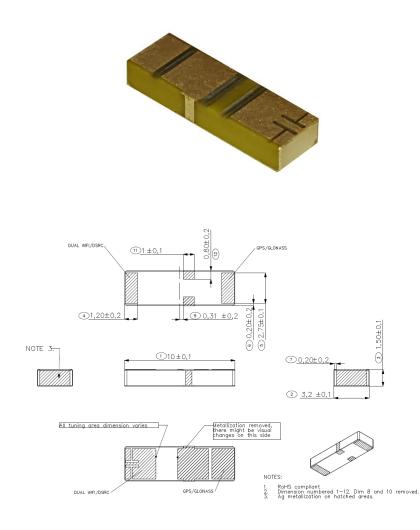

Features:

- 3 in 1 solution on a ceramic chip with two separate feeds.
- Need smaller antenna space on PCB to integrate GPS/GLONASS, Dual WiFi and DSRC bands
- Compact Size (L x W x H) 10 x 3.2 x 1.5mm.
- Fully SMD compatible

Applications:

- GPS / GLONASS (1575-1610MHz)
- IEEE 802.11 a/b/g/n compliant 2.4 and 5GHz. (2400-2485/ 4900-5850MHz)
- DSRC (5850-5925MHz)
- Mobile navigation device

All dimensions are in mm / inches

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



1



Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

ELECTRICAL SPECIFICATIONS			
Frequency, Port 1	1.575-1.610 GHZ		
Frequency, Port 2	2.4-2.485/ 4.9-5.925 GHz		
Normal Impedance	50 Ohm		
VSWR, Port 1	<2.5:1		
VSWR, Port 2	<2:1at low band <2.8:1 at high band		
Efficiency (Typ.), Port 1	60 %		
Efficiency (Typ.), Port 2	80/ 50 %		
Peak Gain, Port 1	1.5 dBi		
Peak Gain, Port 2	2.5/ 3.5 dBi		
Isolation (Min.) at 1.575-1.610 GHz	22 dB		
Isolation (Min.) at 2.4-2.485 GHz	20 dB		
Isolation (Min.) at 4.9-5.925 GHz	22 dB		
Polarization	Linear		
Interface	SMD Mount		

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



2



Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

MECHANICAL SPECIFICATIONS

Block material	Dielectric ceramic
Plating material	Ag
Weight	0.24 g
RoHS Compliant Product	
Tape and reel packing	
Lead free materials	

Lead free soldering compatible

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-30 to +80° C

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP


PART NUMBER: W3095

MECHANICAL DRAWING

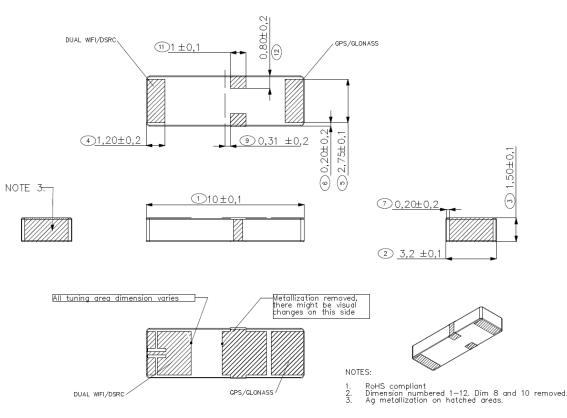

Dimensions: (mm)

Details of antenna pad dimension on the bottom in mm.

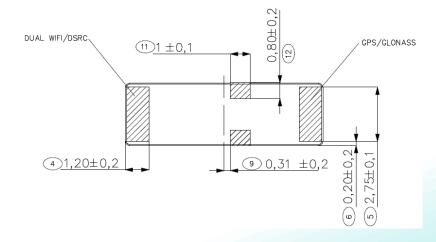

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

4




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

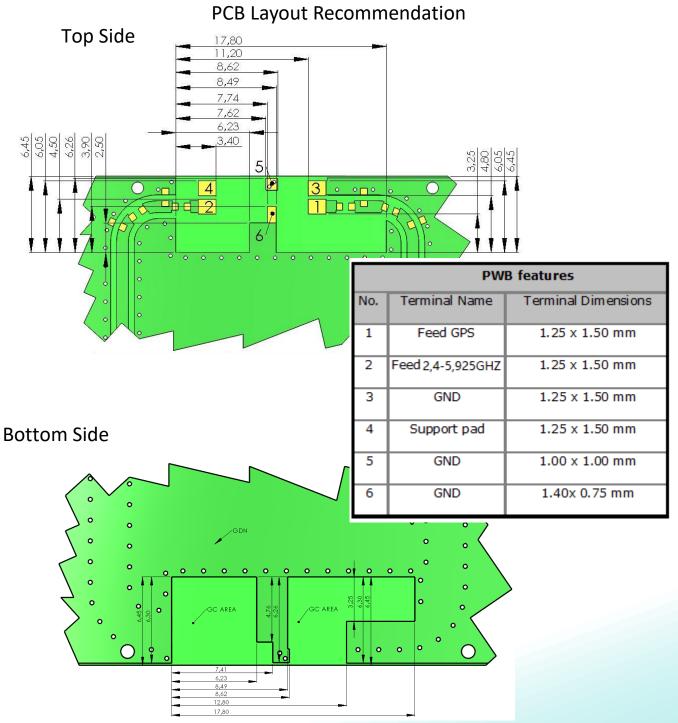

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




Description: GNSS-DUAL WIFI-DSRC ANT


Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

Antenna Alignment on PCB Layout

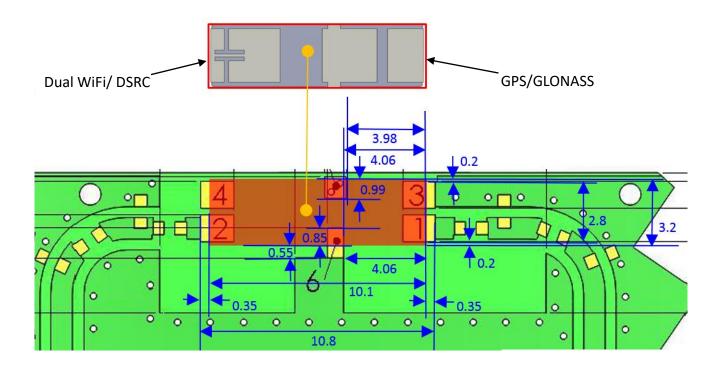



Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

OTHER SPECIFICATIONS

Suggested Matching on PCB

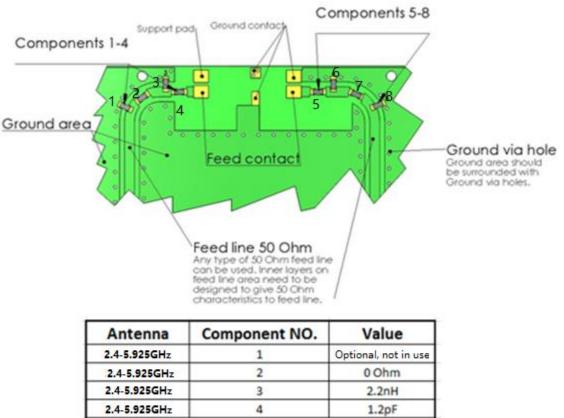

	-	
2.4-5.925GHz	4	1.2pF
GPS/Glonass	5	0 Ohm
GPS/Glonass	6	1.8pF
GPS/Glonass	7	0 Ohm
GPS/Glonass	8	Optional, not in use

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



7




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP


PART NUMBER: W3095

CHARTS

Typical GPS/GLONASS antenna Return Loss

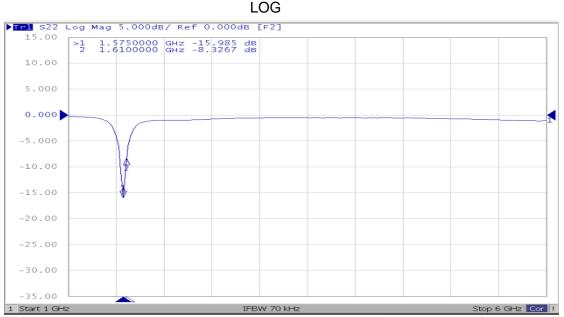

VSWR

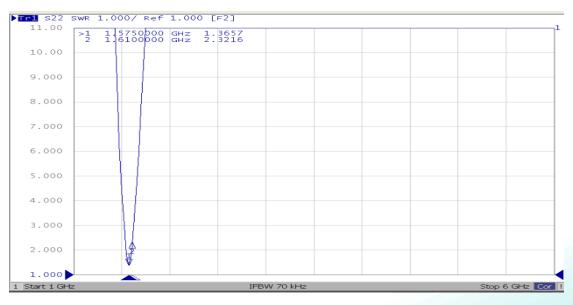

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS



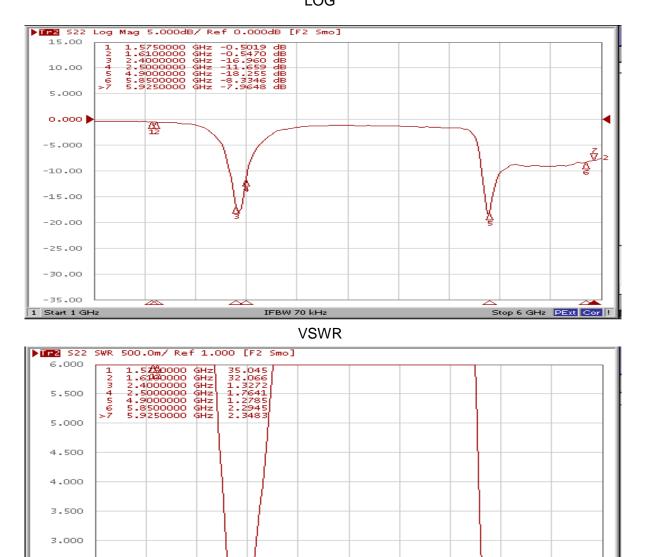

2.500

2.000

1.500

1.000

1 Start 1 GHz

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

~

4

 \sim

IFBW 70 kHz

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



¥

RóHS

Stop 6 GHz PExt Cor !




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

Typical Isolation

PART NUMBER: W3095

CHARTS

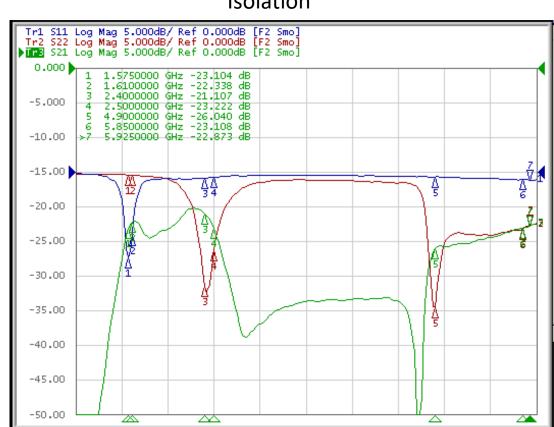

Isolation

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

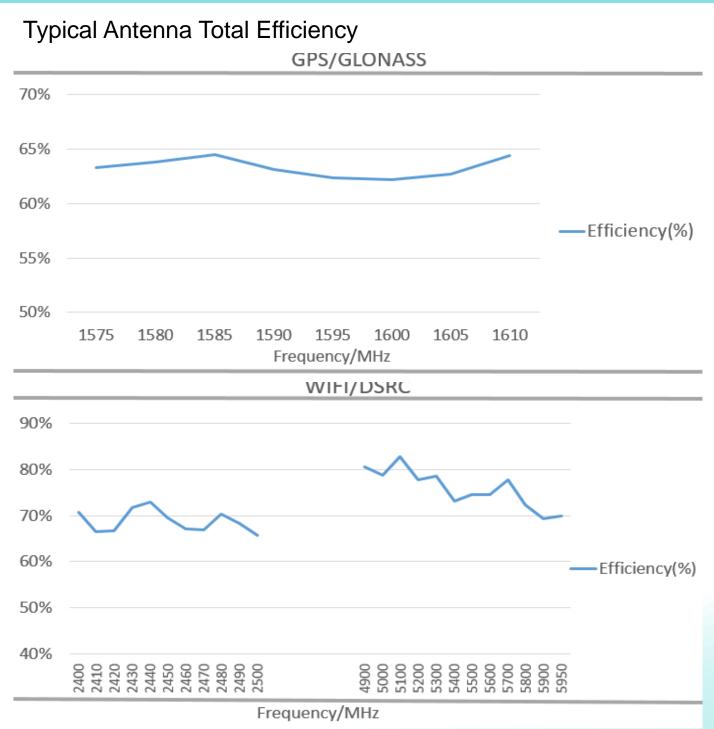

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

11

RoHS




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

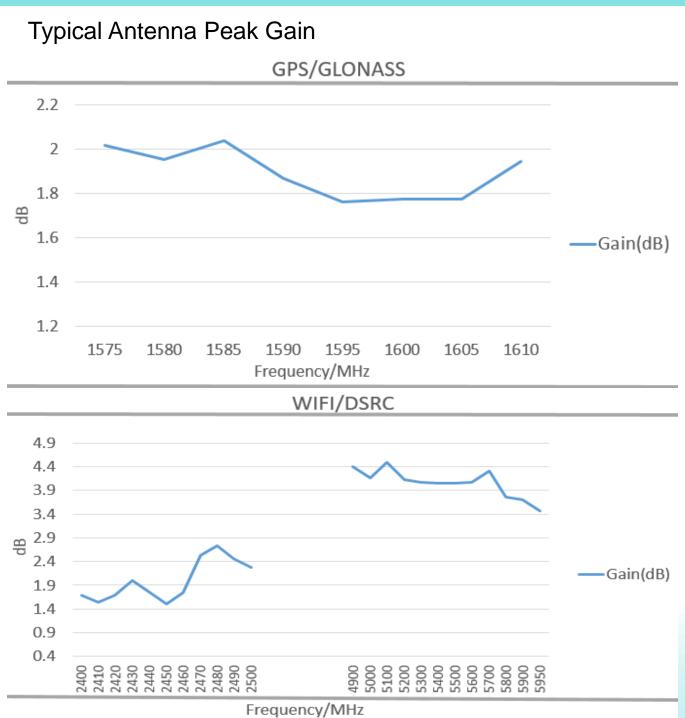

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

12

RoHS




Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

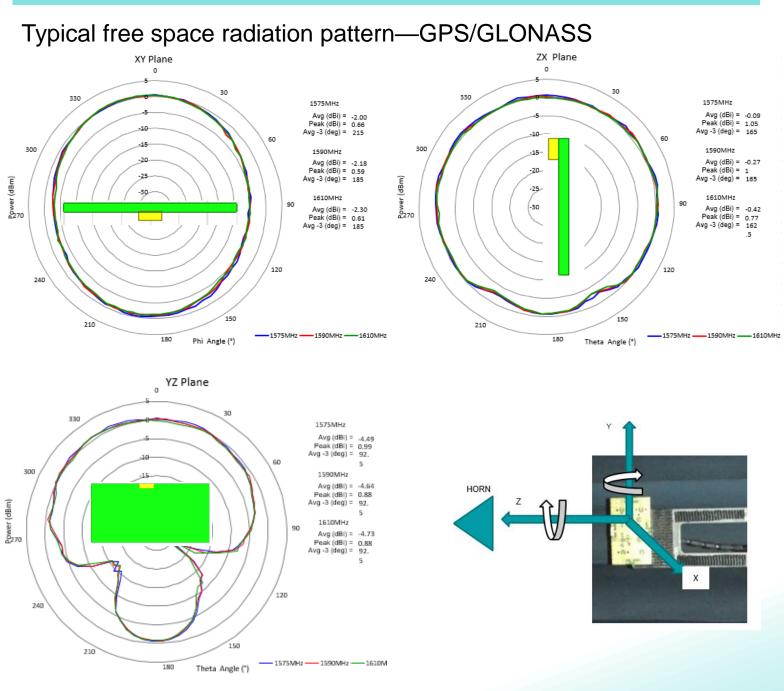

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

Typical free space radiation pattern-2.4G

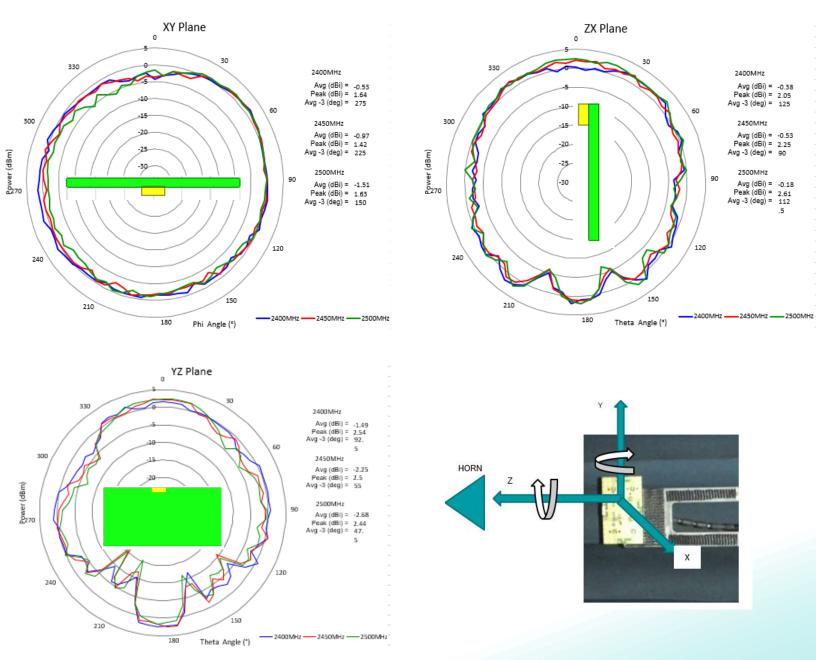

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

CHARTS

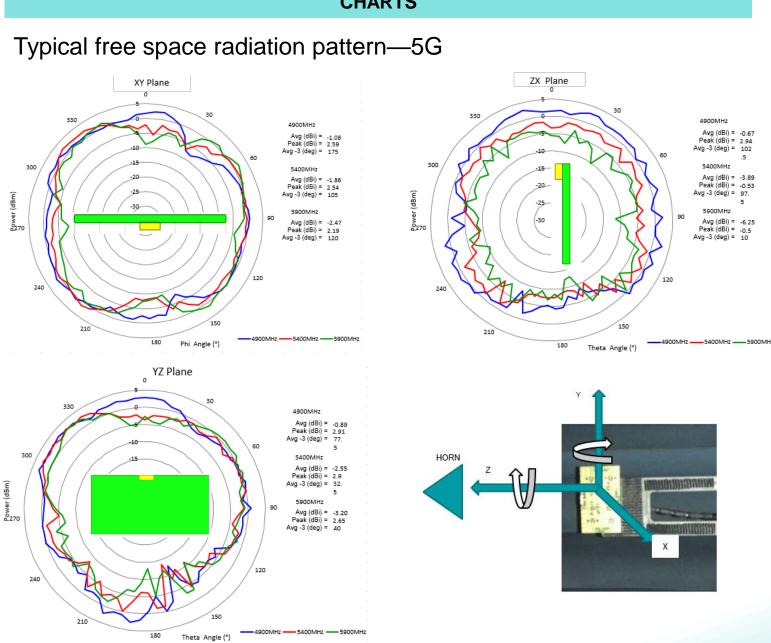

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: GNSS-DUAL WIFI-DSRC ANT

Series: CERAMIC CHIP

PART NUMBER: W3095

PACKAGING

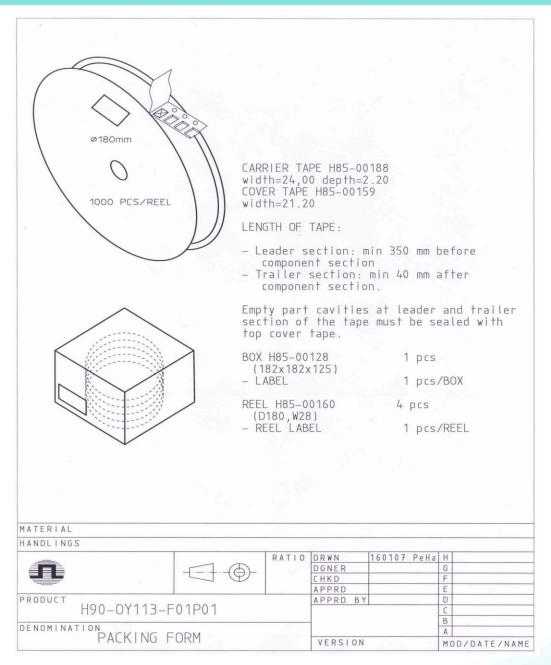

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



16



Description: GNSS-DUAL WIFI-DSRC ANT


Series: CERAMIC CHIP

PART NUMBER: W3095

Block Orientation

Antenna soldering pads facing down to the bottom of the carrier tape

Top view of the carrier tape

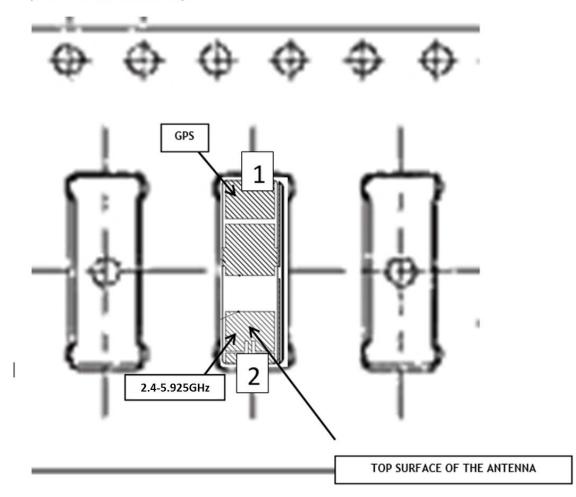

Issue: 1804

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



17

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antenna Development Tools category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below :

0868AT43A0020-EB1SMA EVALBGSA141MN10TOBO1 A10393-U1 PCSD.06.A B5771-U1 KIT-LTE-GNSS-01 KIT-WIFI-ISM-01 A10472-U1 REFLECTOR-EVB-1 A10340-U1 ACAG0201-2450-EVB ACAG0301-15752450-EVB ACAG0301-1575-EVB ACAG0301-24505500-EVB ACAG0301-5500-EVB ACAG0801-2450-EVB ACAG1204-433-EVB ACAG1204-868-EVB ACAG1204-915-EVB ACAR0301-SW2-EVB ACAR3005-C2WB-EVB ACAR3005-S824-EVB ACAR3705-S698-EVB ACAR4008-S698-EVB A10137-D A10194-U1 A10204-U1 A5645H-EVB-1 A5645-U1 A5887H-EVB-1 A6111-U1 M20057-EVB-1 SR42W001-U1 SR42W009-U1 SR4G008-U1 SR4G013-U1 SR4G053-EVB-1 SR4L049-EVB-1 SRC5G027-U1 SRCW004-U1 1001312-01 M310220-01 M620720-01 M830120-01 M830520-01 EB_NN01-105A EB_NN02-201-5G CCKLTE450-NA AEK-GNCP-TH258L15 MPA-104- KIT