


Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

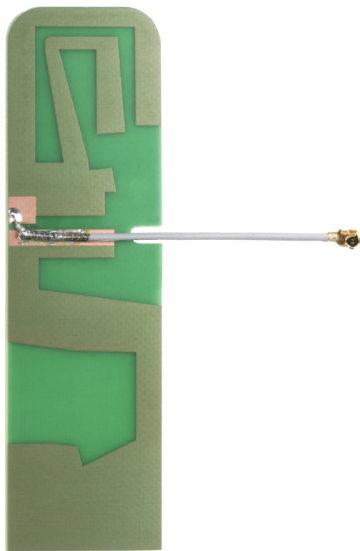

Features

- Very Low profile
- Compact size W x L x H (25 x 87 x 0.2 mm)
- Low weight (1.35 g)
- Cable feed with I-PEX connector (U.FL compatible)
- Lead free materials
- Lead free soldering compatible
- RoHS Compliant Product

Applications

- Frequency range (GSM 850 / GSM 900 / DCS / PCS)

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on device mechanics

GSM 850: 824 – 894 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
824 – 894	1.33	50 / -3.0	-7	50	-45 to +85

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

GSM 900 : 880 – 960 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [$^{\circ}$ C]
880 – 960	1.50	55 / -2.6	-6.5	50	-45 to +85

DCS : 1710 – 1880 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [$^{\circ}$ C]
1710 – 1880	3.75	50 / -3.0	-8	50	-45 to +85

PCS : 1850 – 1990 MHz


Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [$^{\circ}$ C]
1850 – 1990	3.45	50 / -3.0	-8	50	-45 to +85

Cable and Connector Configuration

Cable length: 56 mm

Cable outer diameter: 1.13 mm

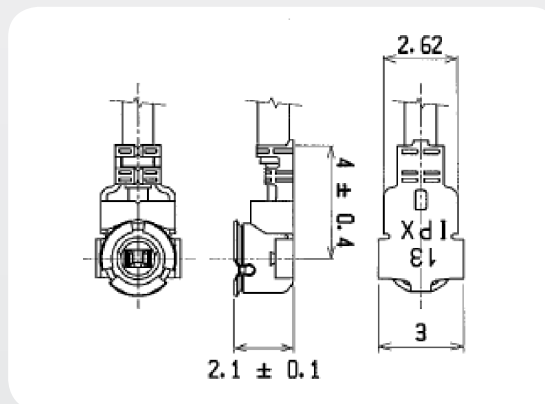

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas




Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

Test Unit and Antenna Location

Test unit size 150 x 100 x 40mm

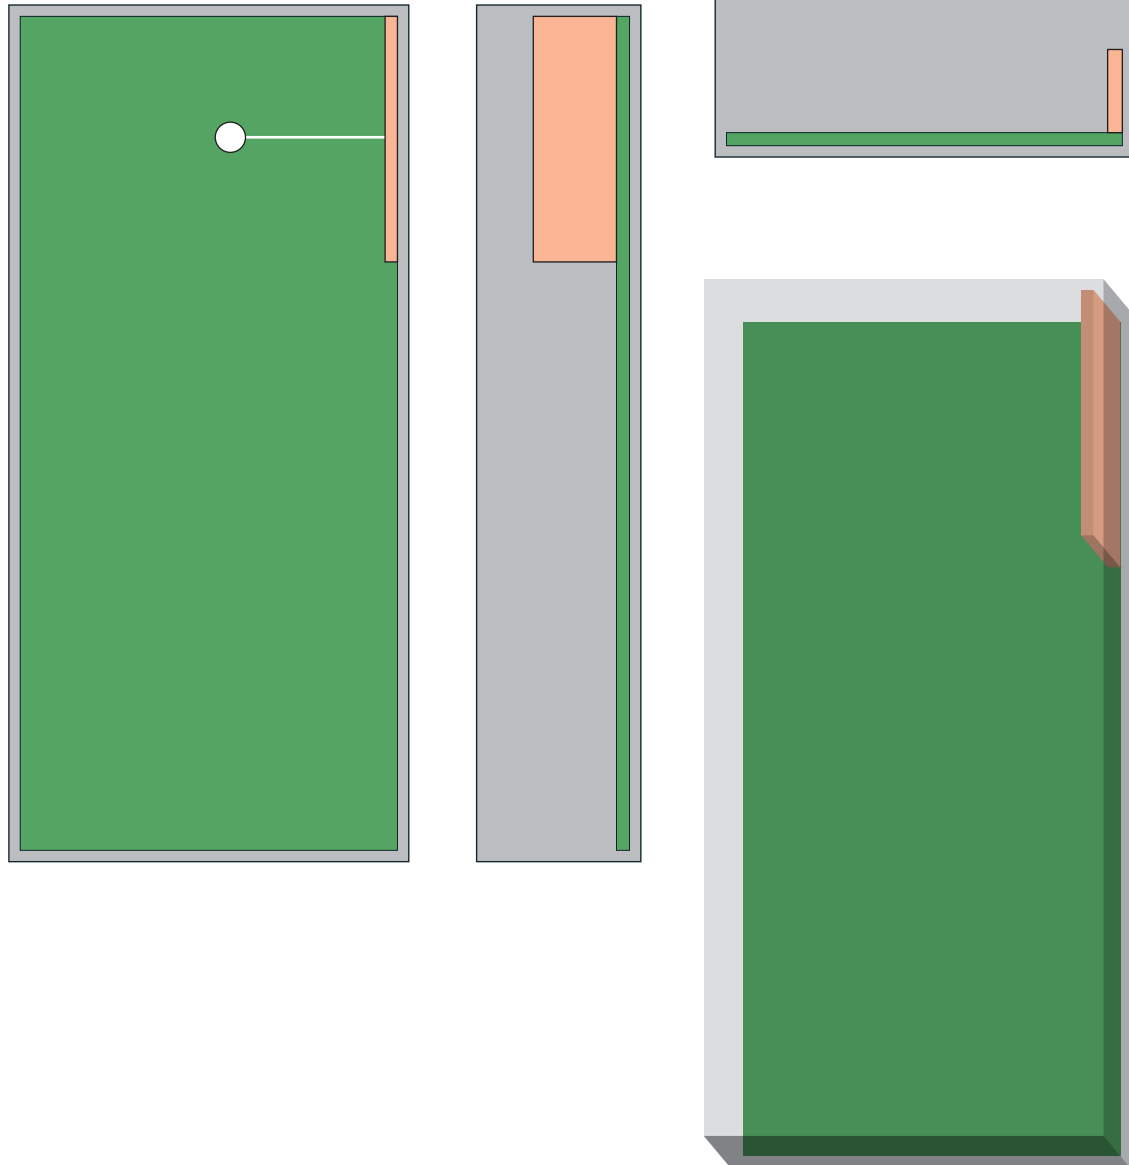

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501



www.pulseeng.com/antennas

Internal Quad Band PWB Antenna


(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

Typical Electrical Characteristics 600 – 2300 MHz (T=25 °C)


Measured on the test board, Typical Return Loss S11/ impedance

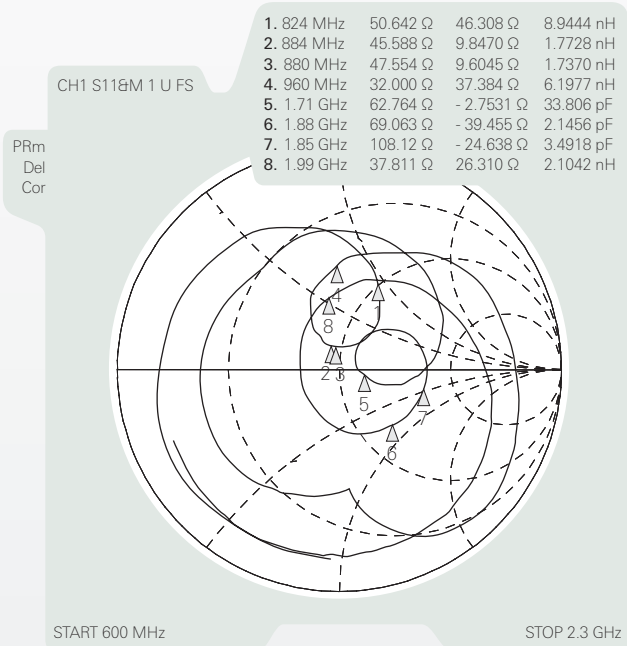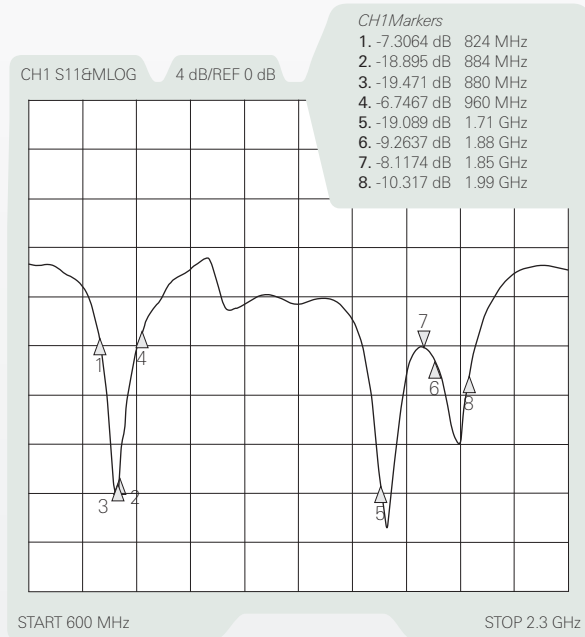

3501 Internal Quad Band Antenna Efficiency

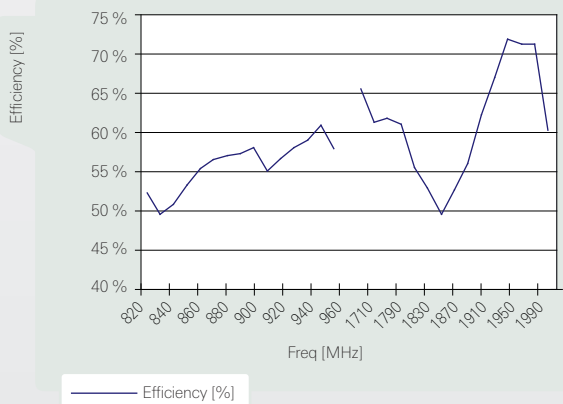

3501 Internal Quad Band Antenna Max Gain

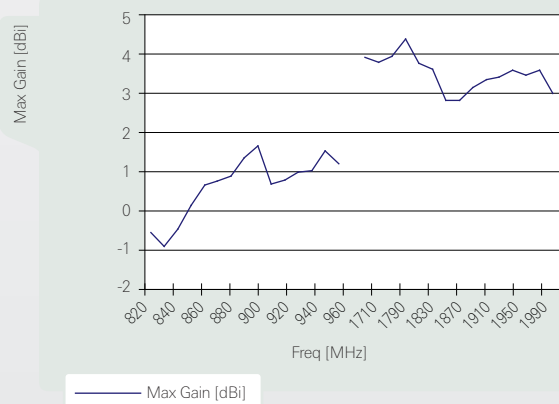

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501





www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

824 – 894 MHz Typical Free Space Radiation Patterns

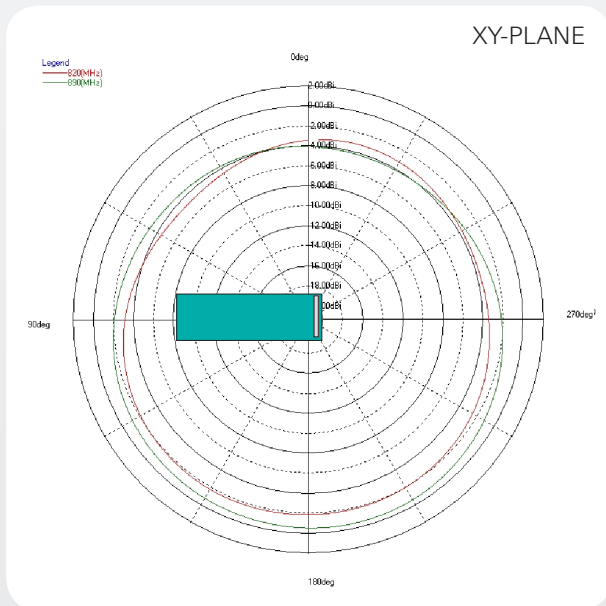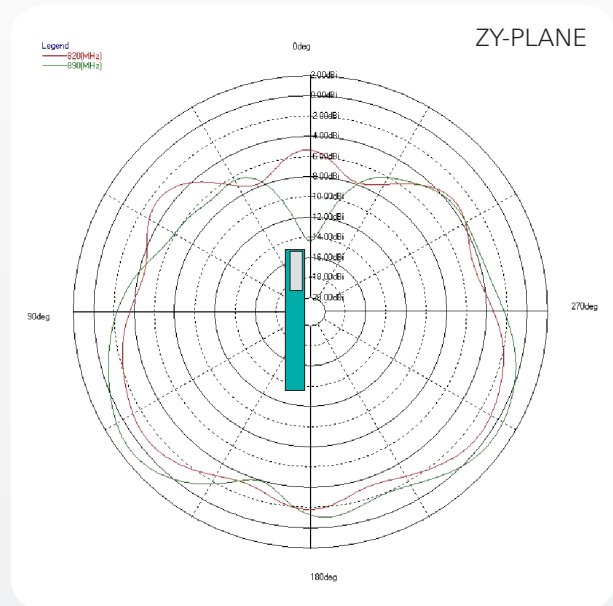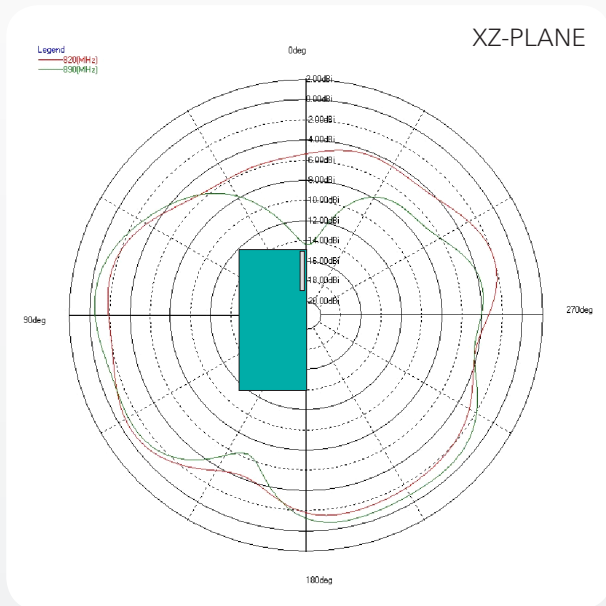

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501





www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

880 – 960 MHz Typical Free Space Radiation Patterns

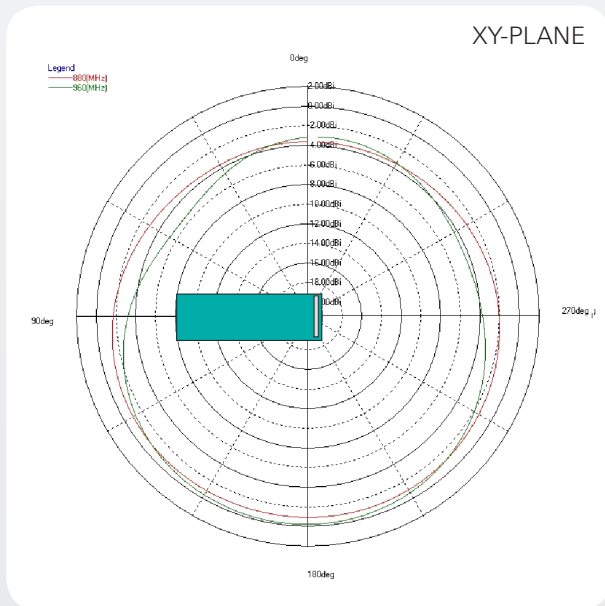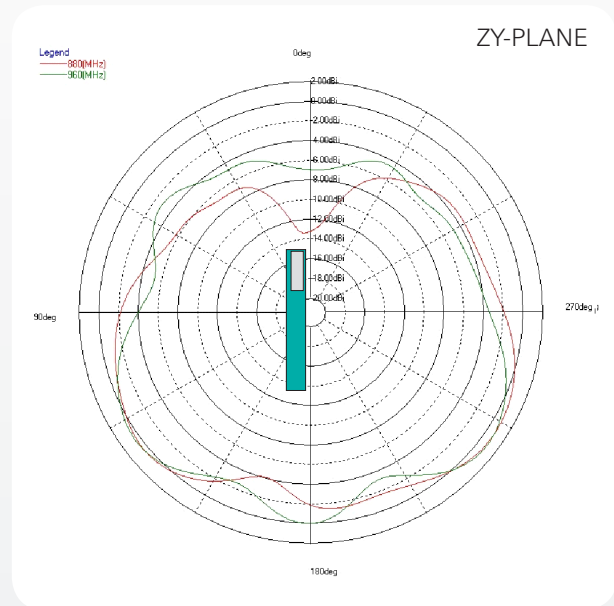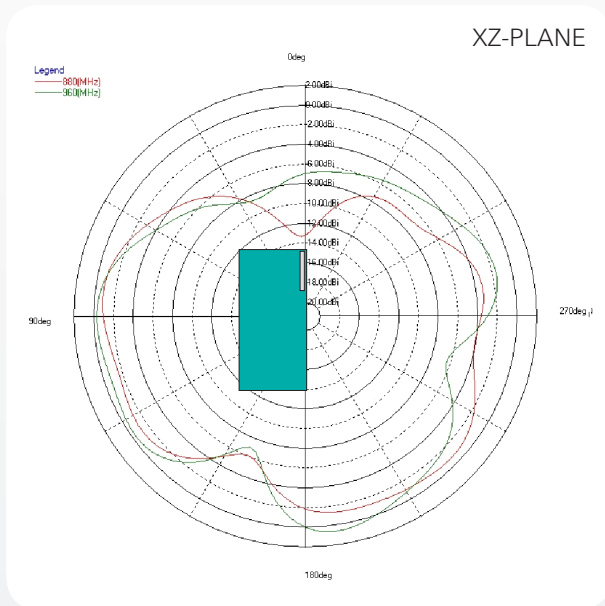

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501





www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

1710 – 1880 MHz Typical Free Space Radiation Patterns

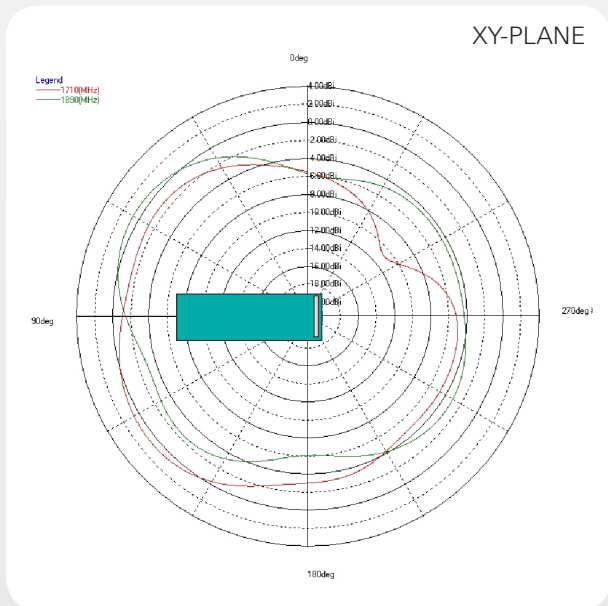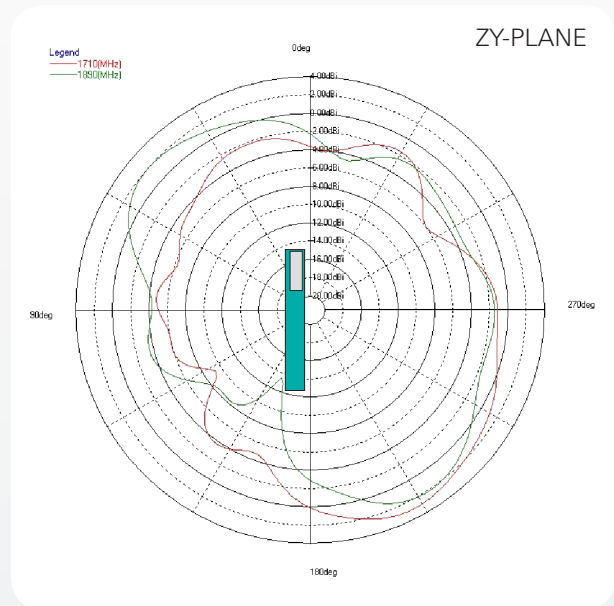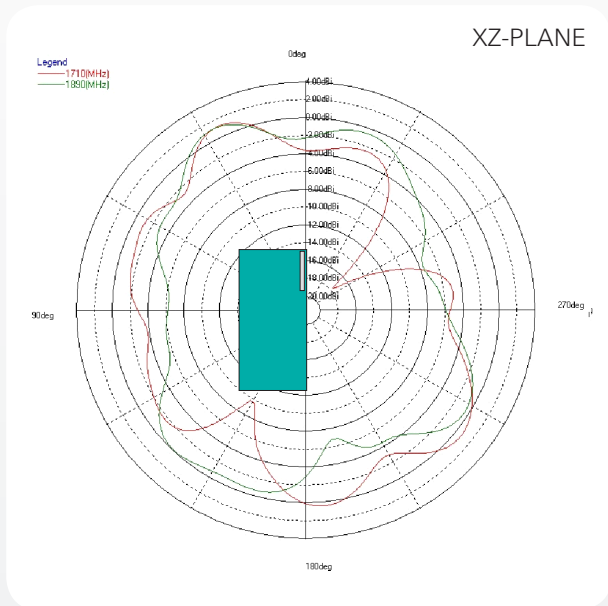

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501





www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(25 x 87 x 0.2 mm, PWB antenna) Pulse Part Number: W3501

1850 – 1990 MHz Typical Free Space Radiation Patterns

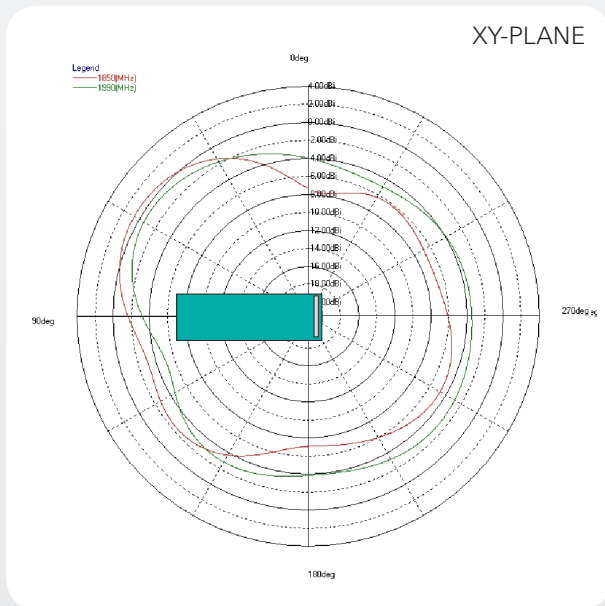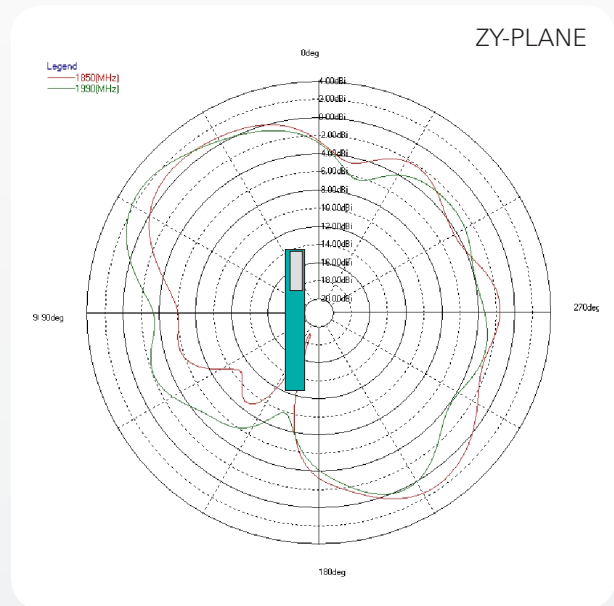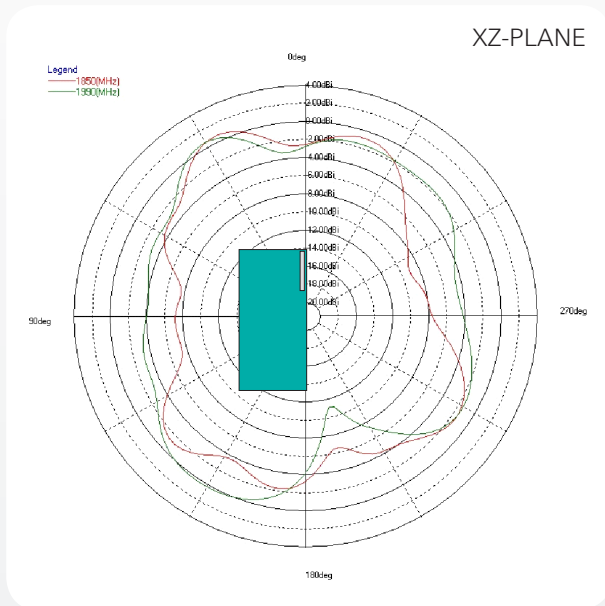

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [PulseLarsen](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#) [MIKROE-2350](#)