




Page 1 of 7

Radome Omni – Omni directional Antenna

W5067

698-960/1710-2170/2400-2700MHz

Series: ANTENNA

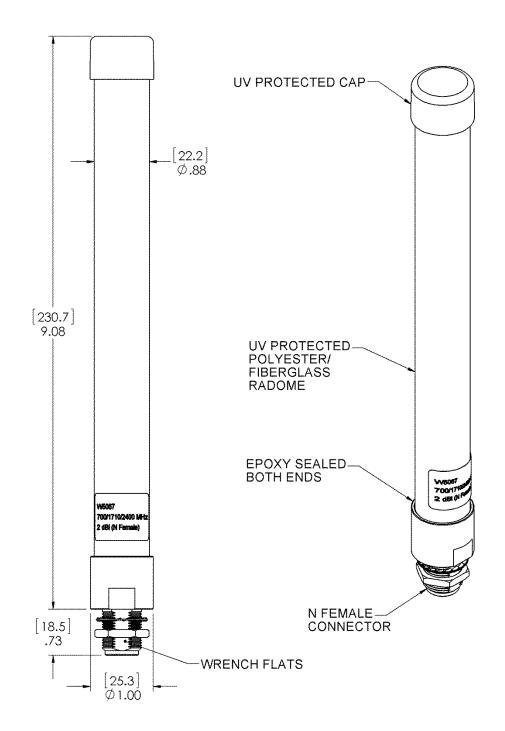

All dimensions are in inches (mm)

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION







Page 2 of 7

Radome Omni – Omni directional Antenna

W5067

698-960/1710-2170/2400-2700MHz

Series: ANTENNA

|--|

Antenna type Dipole (All electrical performance measured "in free space")

Frequency 698-960/1710-2170/2400-2700 MHz

Nominal Impedance 50 $\,\Omega$

VSWR 2:1 Max

Average Peak Gain 700 0.7 dBi

Average Peak Gain 1710 1.0 dBi

Average Peak Gain 2400 2.0 dBi

Efficiency 61 % Avg

HPBW / Horizontal Plane Omni

HPBW / Vertical Plane 700 56 ° TYP

HPBW / Vertical Plane 1710 36 ° TYP

HPBW / Vertical Plane 2400 24 ° TYP

Polarization: Vertical

Power withstanding 3 W

Connector type N-Female

MECHANICAL SPECIFICATIONS

Plastic radome Pultruded polyester/fiberglass – UV protected

Color White

Ingress Protection IP67

Weight 141 g

Overall length 9.08 INCHES

Side loading @ 1 ft 30 Lbs

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION







Page 3 of 7

Radome Omni - Omni directional Antenna


W5067

Series : ANTENNA


698-960/1710-2170/2400-2700MHz

Charts

Vertical plane

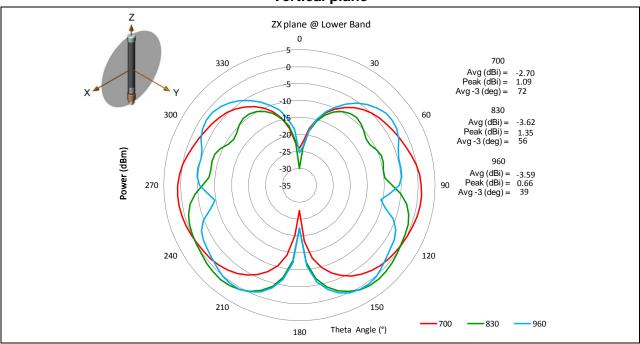

Vertical plane

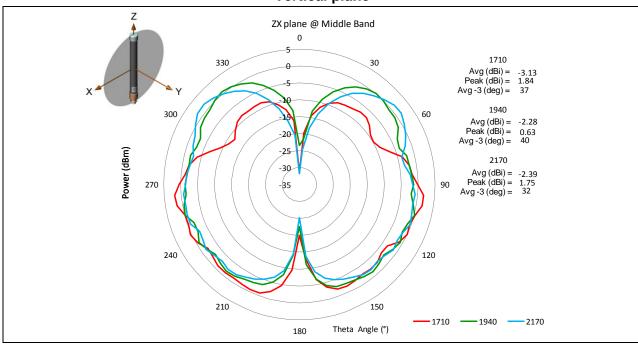

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden





Page 4 of 7


Radome Omni - Omni directional Antenna

W5067


698-960/1710-2170/2400-2700MHz

Series: ANTENNA

Vertical plane

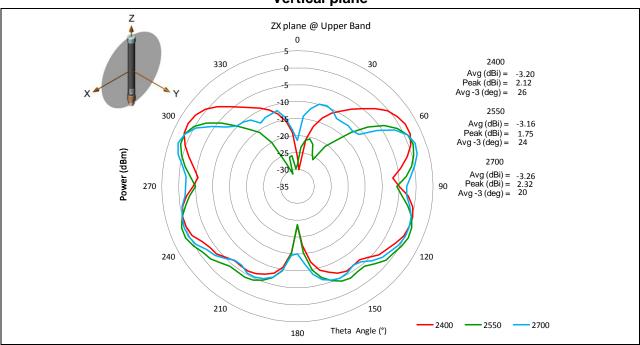

Horizontal plane

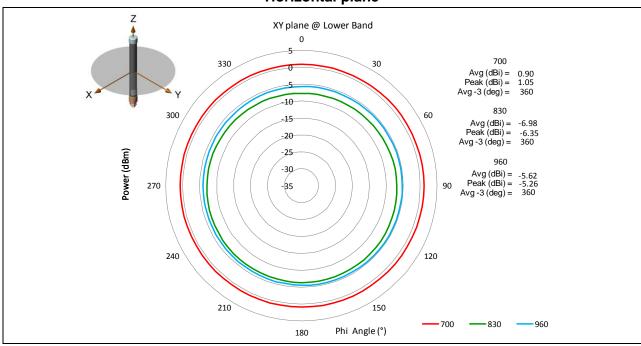

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden





Page 5 of 7


Radome Omni - Omni directional Antenna

W5067


Series : ANTENNA

698-960/1710-2170/2400-2700MHz

Horizontal plane

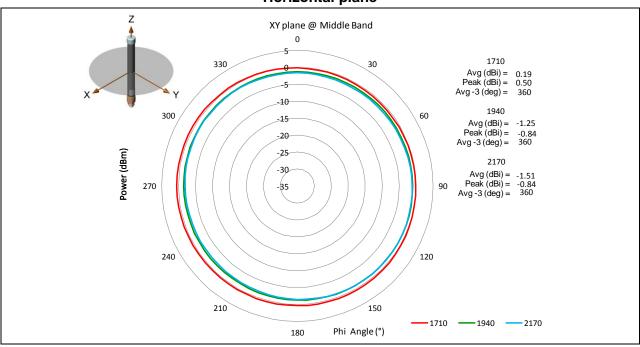

Horizontal plane

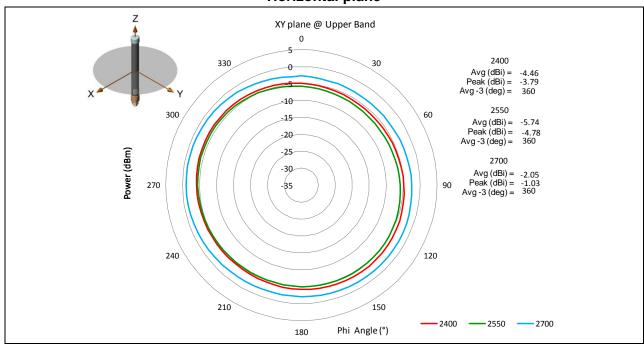

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden






Page 6 of 7

Radome Omni – Omni directional Antenna


W5067

698-960/1710-2170/2400-2700MHz Series: ANTENNA

VSWR

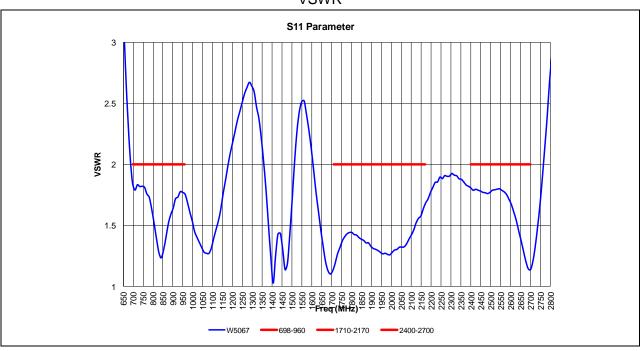

Peak Gain

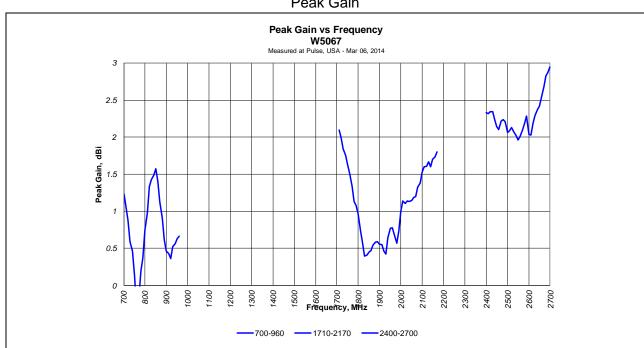

Issue: 1414

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden





Page 7 of 7


Radome Omni - Omni directional Antenna

W5067

698-960/1710-2170/2400-2700MHz

Series: ANTENNA

Efficiency

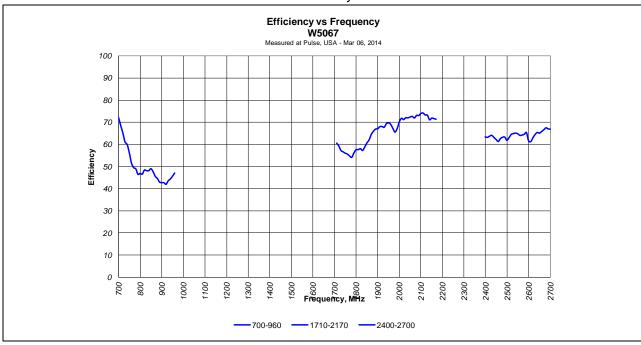

Issue: 1414



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by PulseLarsen manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352 MIKROE-2350