
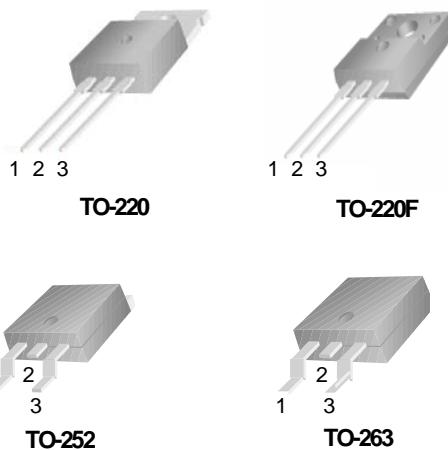


**APPLICATIONS**

- High frequency switch power supply
- Free wheeling diodes, polarity protection applications

**FEATURES**

- Common cathode structure
- Low power loss, high efficiency
- High Operating Junction Temperature
- Guard ring for overvoltage protection, High reliability
- RoHS product

**ORDER INFORMATION**

Product	Package	Pin Assignment			Packing
		1	2	3	
MBR10100CT	TO-220	A	K	A	Tube
MBR10100FCT	TO-220F	A	K	A	Tube
MBR10100YCT	TO-263	A	K	A	Tape Reel
MBR10100DCT	TO-252	A	K	A	Tape Reel

**ABSOLUTE RATINGS (T<sub>c</sub>=25°C)**

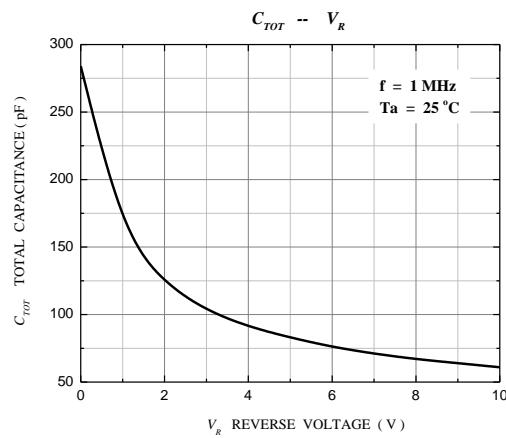
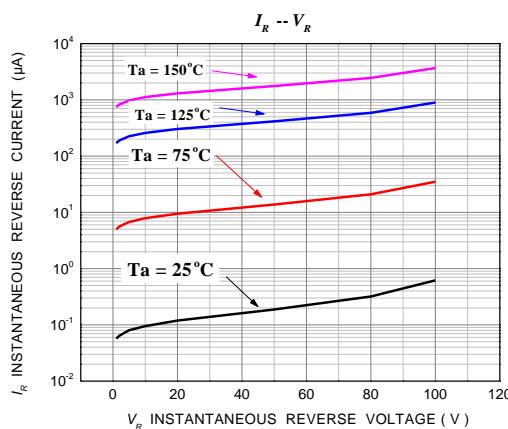
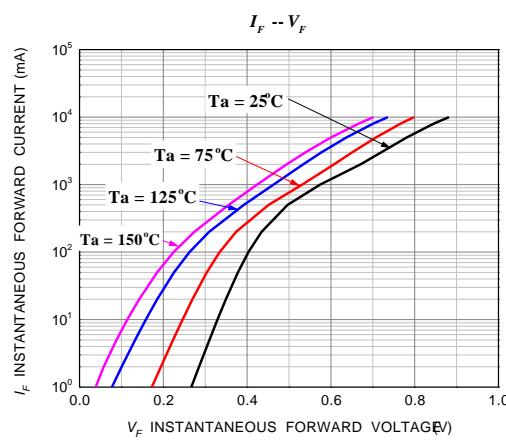
Parameter			Symbol	Value	Unit		
Repetitive peak reverse voltage			V <sub>RRM</sub>	100	V		
Maximum DC blocking voltage			V <sub>DC</sub>	100	V		
Average forward current T <sub>c</sub> =150°C (TO-220/263/ TO-252) T <sub>c</sub> =125°C (TO-220F)	per device		I <sub>F(AV)</sub>	10	A		
				5			
Surge non repetitive forward current 8.3 ms single half-sine-wave (JEDEC Method)			I <sub>FSM</sub>	152	A		
Maximum junction temperature			T <sub>j</sub>	150	°C		
Storage temperature range			T <sub>STG</sub>	-40~+150	°C		

**ELECTRICAL CHARACTERISTICS**

Parameter	Tests conditions		Value(min)	Value(typ)	Value(max)	Unit
$I_R$	$T_j = 25^\circ C$	$V_R = V_{RRM}$			5	$\mu A$
$V_F$	$T_j = 25^\circ C$	$I_F = 5A$		0.80	0.85	V

**THERMAL CHARACTERISTICS**

Parameter	Symbol	Value(min)	Value(max)	Unit
Thermal resistance from junction to case	$R_{th(j-c)}$		2.0	$^\circ C/W$
			2.0	
			3.0	
			4.0	

**ELECTRICAL CHARACTERISTICS (curves)**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by PUOLOP manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)  
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)  
[SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)  
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)  
[NTE505](#) [NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)  
[ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#)  
[10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)