
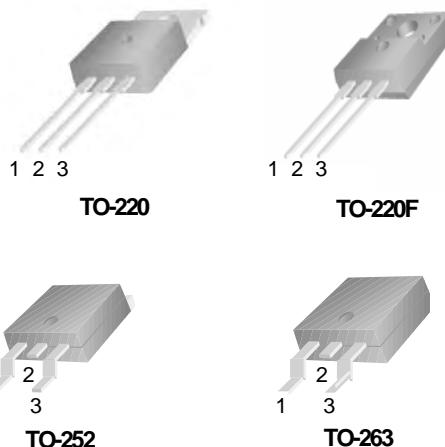


APPLICATIONS

- High frequency switch power supply
- Free wheeling diodes, polarity protection applications

**FEATURES**

- Common cathode structure
- Low power loss, high efficiency
- High Operating Junction Temperature
- Guard ring for overvoltage protection, High reliability
- RoHS product

**ORDER INFORMATION**

Product	Package	Pin Assignment			Packing
		1	2	3	
MBR20150CT	TO-220	A	K	A	Tube
MBR20150CT	TO-220F	A	K	A	Tube
MBR20150YCT	TO-263	A	K	A	Tape Reel
MBR20150DCT	TO-252	A	K	A	Tape Reel

ABSOLUTE RATINGS (T_c=25°C)

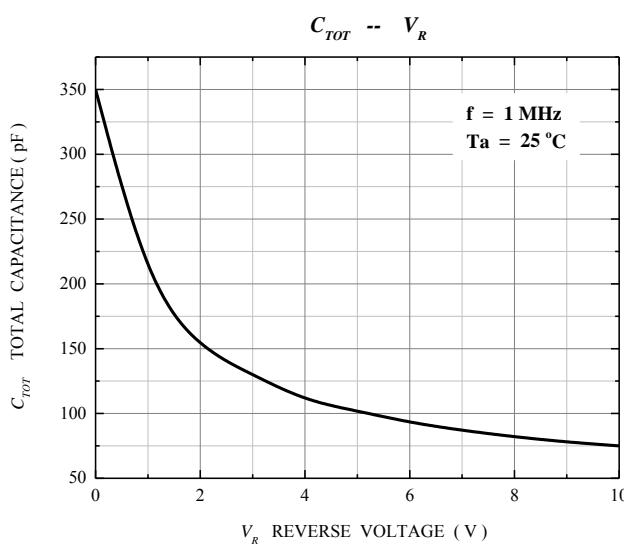
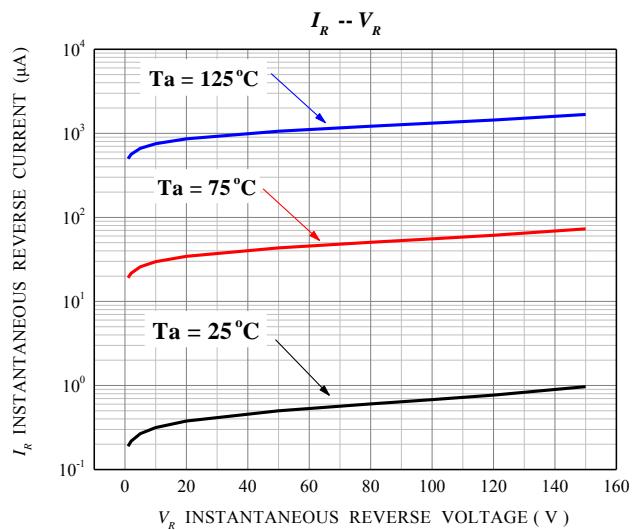
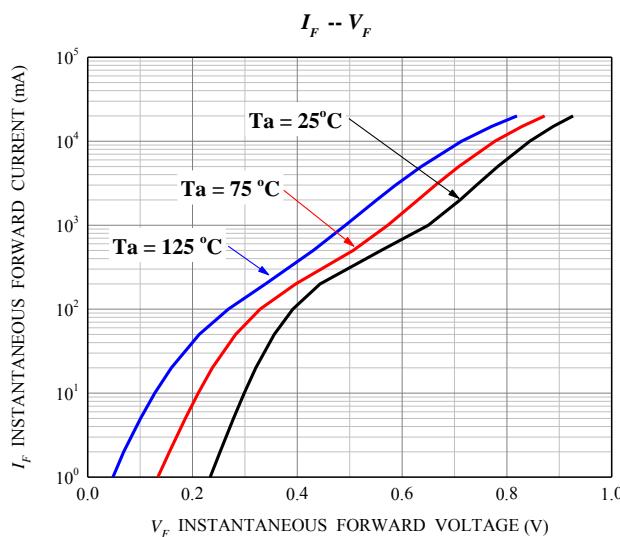
Parameter			Symbol	Value	Unit
Repetitive peak reverse voltage			V _{RRM}	150	V
Maximum DC blocking voltage			V _{DC}	150	V
Average forward current T _c =150°C (TO-220/263/ TO-252) T _c =125°C (TO-220F)	per device		I _{F(AV)}	20	A
	per diode			10	
Surge non repetitive forward current 8.3 ms single half-sine-wave (JEDEC Method)			I _{FSM}	200	A
Maximum junction temperature			T _j	150	°C
Storage temperature range			T _{STG}	-40~+150	°C

ELECTRICAL CHARACTERISTICS

Parameter	Tests conditions		Value(min)	Value(typ)	Value(max)	Unit
I_R	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			10	μA
V_F	$T_j = 25^\circ\text{C}$	$I_F = 10\text{A}$		0.85	0.90	V

THERMAL CHARACTERISTICS

Parameter	Symbol	Value(min)	Value(max)	Unit
Thermal resistance from junction to case	$R_{th(j-c)}$	2.0	2.0	$^\circ\text{C}/\text{W}$
			2.0	
			3.0	
			4.0	

ELECTRICAL CHARACTERISTICS (curves)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by PUOLOP manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)