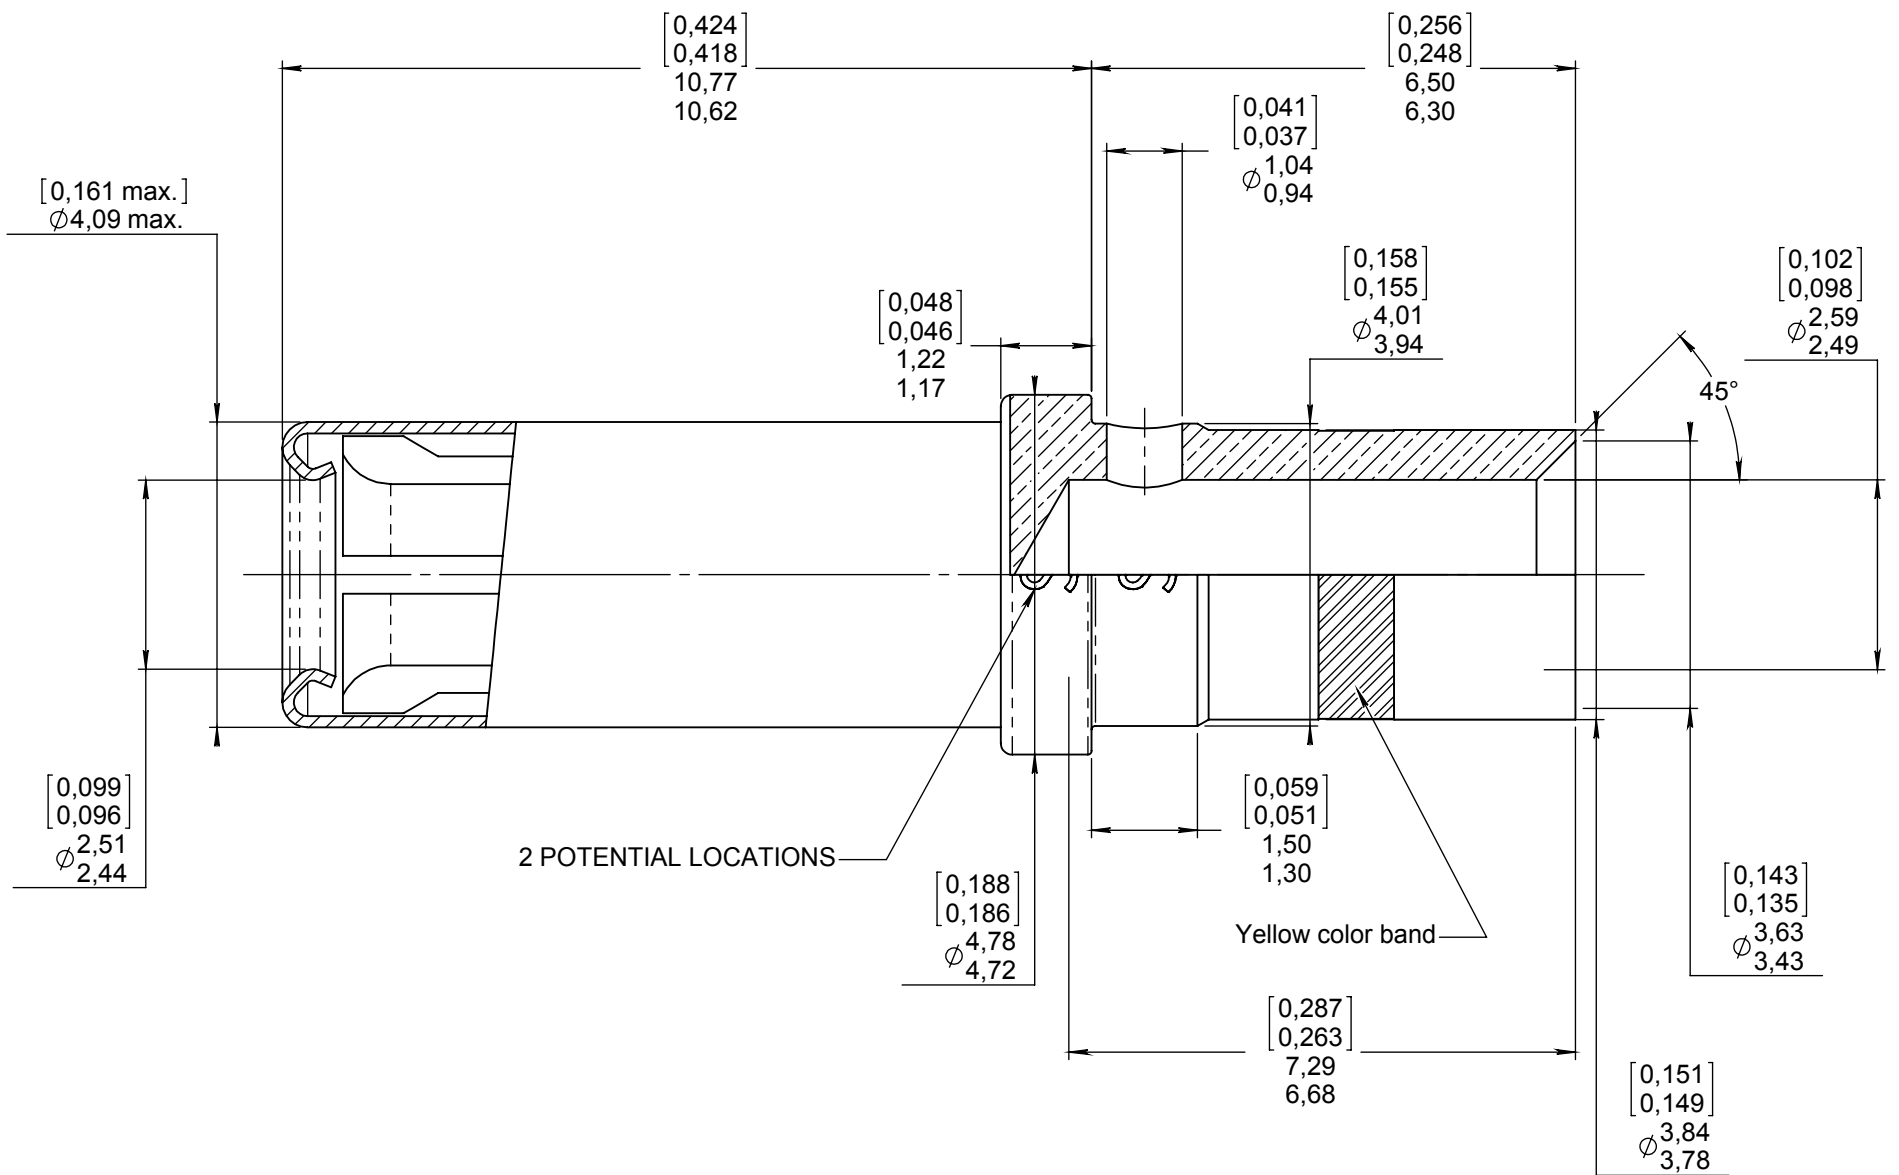


Series
EPX
SIZE 12 CRIMP SOCKET CONTACT
Issue:
May 30, 2016
Page
1/1

MATERIAL :

 CONTACT BODY : BERYLLIUM COPPER PER ASTM B 196
 PROTECTION SLEEVE : STAINLESS STEEL PER SAE AMS-5514

FINISH :

 CONTACT BODY : PLATING .00005 INCH OF GOLD PER SAE AMS-2422 OVER NICKEL PER SAE AMS-QQ-N-290
 PROTECTIVE SLEEVE : PASSIVATED PER SAE AMS-QQ-P-35


WIRING INSTRUCTIONS :

 WIRES ACCOMODATED : AWG 12 - 14 - 16
 INSULATION DIAMETER : 3.40 max (0.133)
 STRIP LENGTH : 0.236 (6)

TOOLING : (ORDERED SEPARATLY)

 CRIMPING TOOL : M22520/1-01 (RADIALL P/N : 282 291)
 SELECTOR POSITION : 8 FOR AWG 12
 7 FOR AWG 14
 6 FOR AWG 16

 POSITIONER : M22520/1-02 (RADIALL P/N : 282 972)
 INSERTION/EXTRACTION TOOL : M81969/14-04 (RADIALL P/N : 282 549 004)

DIMENSIONS : mm (inch are given for information only)


CREATION	May 30, 16	Protective sleeve 4.01/4.09 >>> 4.09 max	YON P.	VIEIRA D.
	Jan 25, 08	Ins/ext tool updated	Pailot N	Pessard M.
PEN:	May 16, 07	Add "16" in wires accomodated and "6 for AWG 16" in selector position, Dimensions updated	Malty S	Pessard M
NOM: FALETTI L	Oct 8 98	Syntax error: crack was creak ;updated finish ; Ø1.04/0.94 was Ø1.05/0.95 ; added 2 "S" locations, 10.76[.424]/10.63[.418] was 10.75[.423]/10.50[.413], Ø4.09 [.161] was Ø4.01 [.159]	Garcia L	Verneau O
DATE: Jan 17 1990	Issue	Revisions	Name	Approved
APPR.:				

617350EN

RADIALL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)
[765-18-0080D](#) [829992-1](#) [902-77-02113](#) [PS00/A0620/6300](#) [PS25/A0420/63](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#)
[MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-](#)
[W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#)