


718921 R 191 970 071

SMA 2.9 MALE - SMA 2.4 FEMALE

SERIES: ADAPT

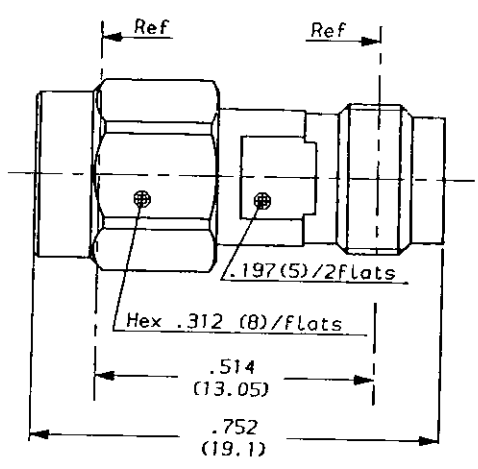

WEIGHT 0 oz (..... g)

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-46	GHz
TEMPERATURE RATING	-65 / +165	°C
VSWR	1.05+0.005 f (GHz)	Max
RF INSERTION LOSS	0.25	dB Max
VOLTAGE RATING	-	V _{rms}
DIELECTRIC WITHSTANDING VOLTAGE	750	V _{rms}
INSULATION RESISTANCE	5000	MΩ
HERMETIC SEAL	NA	cc/s cm ³ /s
LEAKAGE (pressurized only)	NA	psi kg/cm ²
-	-	-
-	-	-

STANDARDISATION	NA
CABLE RETENTION	NA Lb Max NA N Max
CENTER CONTACT RETENTION	
Axial force - mating end	20 Lb N min
Axial force - opposite end	20 Lb N min
Torque (Max)	20 N mm NA inch.oz NA cm.N
MATING TORQUE RECOMMENDED	7.08 to 9.73 inch.lb cm.N
-	-
-	-

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
Body+O.C SMA 2.4	Stainless steel	Passivated
Outer contact SMA 2.9	Brass	Gold over nickel
Center contact	Beryllium copper	Gold over nickel
Insulator	Kapton	-
Gasket	Silicon	-
Coupling nut	Stainless steel	Passivated
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.

Initiated on 26-05-89
Superseded on -----

The information given here is subject to change without notice. Design changes may be in order to improve the product.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series category:](#)

Click to view products by [Radiall manufacturer:](#)

Other Similar products are found below :

[5945-9503-000](#) [MCX/F-SMA/M](#) [R192417010](#) [ADBJ20-E1-BJ379](#) [ADM2](#) [ADPL75-A1-PL75](#) [242191](#) [9317505](#) [29-3835P](#) [AD130](#) [ADBJ20-E1-PL74](#) [ADBJ77-E1-UPL20](#) [ADRMF370](#) [242215](#) [242228](#) [R125680000W](#) [R192430000](#) [UAD95](#) [1057367-1](#) [8311505](#) [R114704000](#)
[R451034500](#) [R451030500](#) [R451543000](#) [HDVDPN](#) [ADBJ20-K1-PL20](#) [R451570000](#) [R192419000](#) [R451034000](#) [J9](#) [J3WE-5](#) [R451032500](#)
[242201RP](#) [17K132-K00S5](#) [AD-RSMAF-RTNC](#) [53K156-K00N5](#) [02K119-K00E3](#) [29S132-K01N5](#) [53S156-K00N5](#) [02S119-S00E3](#) [28K132-K00N5](#) [02S109-K00S3](#) [27-8200TP](#) [242235](#) [ADBJ20-E1-BJ89](#) [000-2900](#) [321-102-003 \(SMA-50/2-H155/W1.03 AU\)](#) [1057377-1](#) [321-350-001 \(SMA-50-R/2-RG316/N2.01\)](#) [RF2-03-T-00-50-G](#)