



Connect to the future

Service cordons
BP 30 Rue Velpeau
37110 CHATEAU-RENAULT

FICHE TECHNIQUE CORDON

TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER : R285.426.000

Issue : 00


Date : 01/06/04

Customer : FARNELL UK

Specification : NA

Edition / Issue : - NA Date : NA

All dimensions are in mm

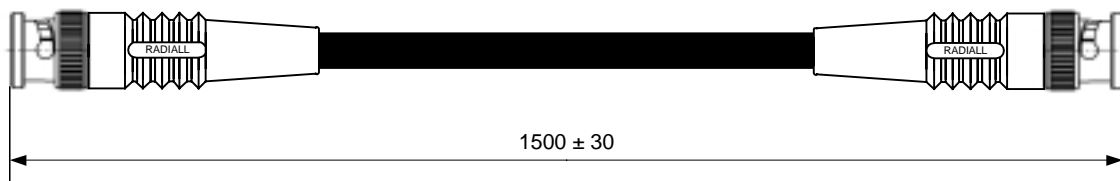

Connectors designation :	Connector 1 : BNC straight plug crimp type (R141.082.161) Torque Wrench : NA	Connector 2 : BNC straight plug crimp type (R141.082.161) Torque Wrench : NA
Cable designation :	KX15 (C291.305.010)	
Cable colour :	Black	
Outer diameter :	4.95mm	
Marking:	NA	

ELECTRICAL CHARACTERISTICS :

High Frequency

Characteristic impedance : **50Ω**

Frequency range : **DC-1GHz**

Insertion Loss : **NA**

Return Loss. : **NA**

Low Frequency

Insulation Resistance : **5000 Mohms mini**

Voltage Rating : **500 Vrms maxi**

CUSTOMER'S APPROVAL

Service or
Company's stamp

Name
Date

MECHANICAL CHARACTERISTICS :

Static bending radius : **20mm**

Cable crush resistance : **NA**

Life (connectors) : **100 matings**

ENVIRONMENTAL CHARACTERISTICS :

Temperature range : **-35°C/+70°C**

J.MOLLES	04/23	01/06/04	Création / First Issue	O. LE FOULER	1/1
Nom / Name	Edition / Issue	Date	Modification	Vérfié par / Checked by	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Radiall](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-](#)
[COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#)
[GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-](#)
[1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#)