






BNC FEMALE COAXIAL TERMINATION 4 GHZ 1W

PAGE 1/2 ISSUE 27-05-15A SERIES TERMINATION PART NUMBER R404115150

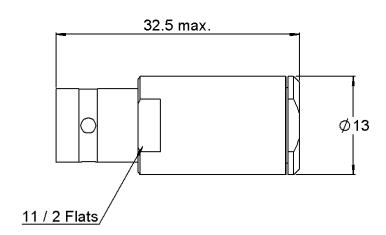



Scale 1:1



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body Center contact	STAINLESS STEEL BERYLLIUM COPPER	PASSIVATED GOLD OVER NICKEL
Outer contact	-	-
Insulator	PTFE	
Gasket	-	
Substrate	ALUMINA CERAMIC	
Resistor	THIN FILM	
Others parts	STAINLESS STEEL	PASSIVATED





BNC FEMALE COAXIAL TERMINATION 4 GHZ 1W

PAGE <b>2/2</b>	ISSUE <b>27-05-15A</b>	SERIES TERMINATION	PART NUMBER <b>R404115150</b>
-----------------	------------------------	-----------------------	-------------------------------

## **ELECTRICAL CHARACTERISTICS**

Frequency (GHz) DC - 1 1 - 4 V.S.W.R ( $\leq$ ) 1.05 1.12

Operating Frequency Range	DC - 4	GHz
Impedance	50	Ω
DC Resistance	50	Ω ± 5%
Peak power at 25°C (1µs, 1‰)	50	W
Average power at 25°C	25°C 1 W (Free Air Cooled)	
		W (Conduction Cooled)
		,


#### **MECHANICAL CHARACTERISTICS**

Connectors	BNC	Female	MIL C 39012
Weight	<b>20,6700</b> g		

# **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature range	-55/+125	°C
Storage temperature range	-55/+125	°C

### Power derating Versus temperature



#### **SPECIFICATION**

## **OTHER CHARACTERISTICS**

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Terminators category:

Click to view products by Radiall manufacturer:

Other Similar products are found below:

M39030/3-04S M39030/3-04S M39030/3-09S M39030/3-11N TNG1-9-78-D3 TNA2-50 TNG1-6-78 TNH1-1-50 R404280000 TNGFL1-1-78 R4042N5000 53S1RR-001N3 142275 56S1RR-001N4 65\_BNC-50-0-7/133\_NE 71S1RR-001N4 02S17R-001D3 R404240120 R404260000 HT-10-2 FL LCX 50-OHM-RSMA M39030/3-04N TNA1-6-50 131-3801-811 TNA1-1-50 65\_N-50-0-51/113\_NE 65\_BNC-50-0-2/133\_NE 65\_N-50-0-1/133\_NE 65002\_N-50-1/122\_NE 65\_MMCX-50-0-31/111\_OE 18K15R-0.5E3 2702702 TRM-2161-M0-35M-02 53S17R-001N3 1100.19.0001 6701.01.B 18S24H-40ML5 TRM-2053-M0-NNN-02 R404759000 M39030/6-02N TRM-2053-MC-NNN-02 M39030/3-03S SF8012-6009 6701.01.A 65\_MCX-50-0-4/111\_NE 65\_716-50-0-2/003\_-E 65\_SMB-50-0-1/111\_NE M39030/3-12N 82-5722-RFX 8018-6174