

E-Box M12, 1 pushbutton flat white, illuminated, FLEXLAB

1.22.392.000/2000



General information

Color of housing cap grey

Dimensions

Dimensions 123,2 mm x 40 mm, height depending on actuators used

Mechanical design


| | |
|----------------|------------------------------------|
| Mounting | with clip in 40 mm aluminum rails |
| Connection | M12 |
| Plug M12 | 4-pin |
| Actuator 1 | Pushbutton FLEXLAB (1NO); 1NO: 3-4 |
| LED actuator 1 | LED white; 1-2 |

Electrical characteristics

| | |
|------------------------|--------|
| Operating current min. | 1 mA |
| Operating current max. | 100 mA |
| Rated power max. | 250 mW |

Other specifications

| | |
|----------------------------|-----------------------------|
| Protection as per EN 60529 | IP65 |
| Protection class | II |
| Operating temperature min. | -25 °C |
| Operating temperature max. | +70 °C |
| Operating life / B10 | depending on actuators used |
| ROHS compliant | yes |
| REACH compliant | yes |

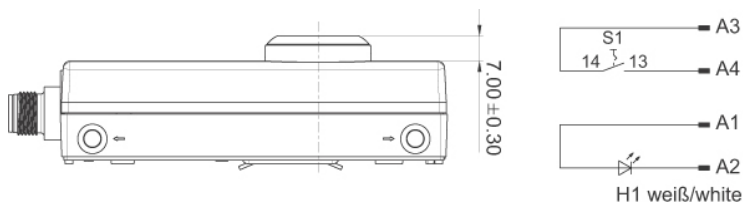

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Emergency Stop Switches / E-Stop Switches](#) category:

Click to view products by [Rafi](#) manufacturer:

Other Similar products are found below :

[84-6830.0020](#) [AVN302N-R](#) [3050.1302Y](#) [44-710](#) [84-6841.2B20](#) [ZA2BV05](#) [951FY000-WO](#) [ER6022-022N](#) [952+2000-00](#) [ES3S51653001](#)
[601+0000-OP](#) [E100-A2A22S05A](#) [XCSEA802](#) [XCSB502](#) [2TLA030051R0100](#) [D2D 1009M](#) [D2D 1013H](#) [AZM 170SK-02ZRKA 24VAC/DC](#)
[84-6820.0020A](#) [84-6820.0040](#) [XY2CH13250H29](#) [XCSDMR590L01M12](#) [XCSTA892](#) [XCSMP80L5](#) [FB1W-HW1B-M220B](#) [FB1W-HW1B-](#)
[X401R](#) [84-5221.2B20](#) [AZM KEY \(M5\)](#) [AZ 17/170-B15](#) [AZM 161SK-12/12RKA-110/230](#) [AZM 415-11/11ZPK 24VAC/DC](#) [AZM 415-](#)
[11/11ZPKA 24VAC/DC](#) [AZM 161-B1S](#) [AZ 15/16-B1-2245](#) [AZ 17/170-B11](#) [AZ 17-11ZI B5](#) [BNS 40S-12Z 10,0M](#) [AZ 16-02ZVRK-ST](#)
[AZ/AZM 415-B2](#) [AZ/AZM 415-B3](#) [MZM 100-B1.1](#) [A-K8P-M12-S-G-5M-BK-2-X-A-4-69](#) [A-K8P-M12-S-G-10M-BK-2-X-A-4-69](#) [A-K5P-](#)
[M12-S-G-10M-BK-2-X-A-4-69](#) [A-K4P-M12-S-G-2M-BK-2-X-A-4-69](#) [AZ/AZM201-B30-RTAG1P1-SZ](#) [SK-BETÄTIGER M3](#) [SK-BET.M4](#)
[KPL. M.KAP.](#) [BETÄTIGER A1 KPL.](#) [SKT-U1Z M3](#)