

# MD1705

## Multilayer Chip Antenna for Extra Wide Band (Preliminary Information)

## MD1705 Multilayer Chip Antenna

### ◆ Features

- Size : 17.0mm(L)X5.0mm(W)X1.63mm(H)
  - Light weight and low profile
  - Omni-directional in azimuth
- Lead (Pb) Free

### ◆ Applications


- Broad Band wireless communications

## Specifications


Frequency range	800~2100MHz
Peak gain	1 dBi
Operation temperature	-40 ~ +85 °C
Storage temperature	-40 ~ +100 °C
VSWR	2.5 (Max)
Input Impedance	50 Ohm
Power handling	5W (Max)
Bandwidth	1300 MHz (typ.)
Azimuth beam width	Omni-directional
Polarization	Linear
Soldering pad	Natural tin

# Pin configuration

Top view

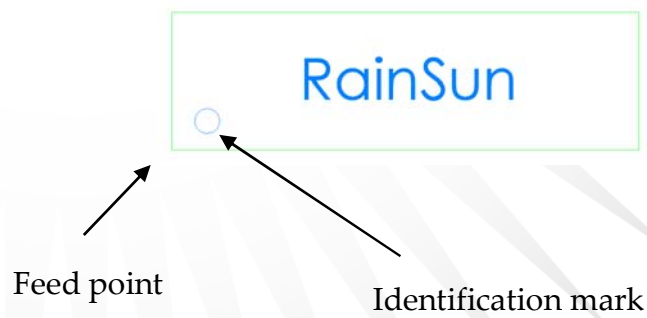

Bottom view

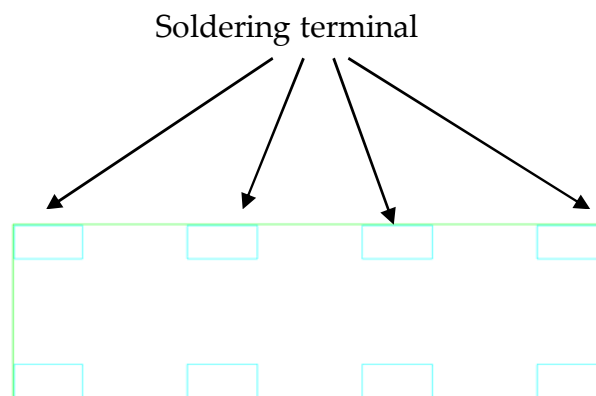


# Dimensions

Top view




Bottom view

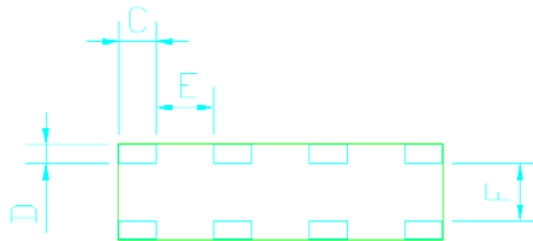

Symbol	Dimensions (mm)
A	$17.0 \pm 0.1$
B	$5.0 \pm 0.1$
C	$2 \pm 0.1$
D	$1 \pm 0.1$
E	$3 \pm 0.1$
F	$3 \pm 0.1$

# Recommended Test Board Pattern

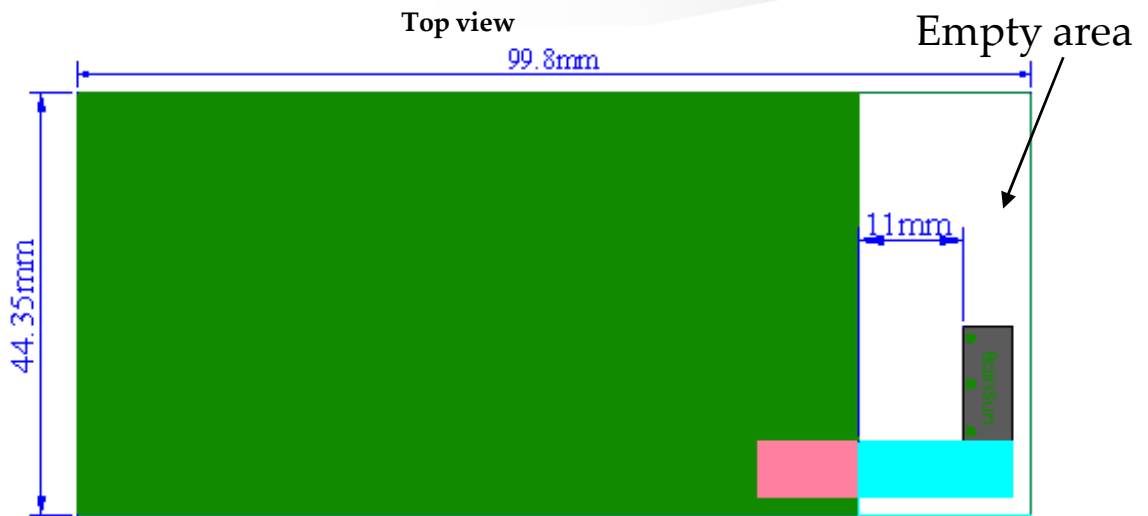


- GND plane
- Matching circuit
- 50 Ohm feeding line


Unit : mm

Board thickness : 0.8mm  
Board material : FR4

**Fig-1**

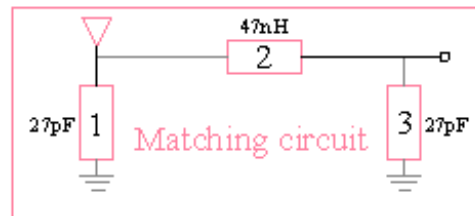

## Testing Setup

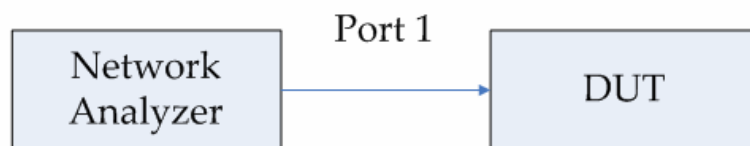

## Measurement



### Testing Instrument:

Anritsu 37369C VNA( Vector Network Analyzer)

VNA calibrate with 1 path reflection only calibration sequence on test board feed point.


The test board dimension and it's layout is the same as Fig-1.

# Typical Electrical Characteristics

## Return loss

S11 FORWARD REFLECTION

LOG MAGNITUDE      REF=0.000 dB      10.000 dB/DIV

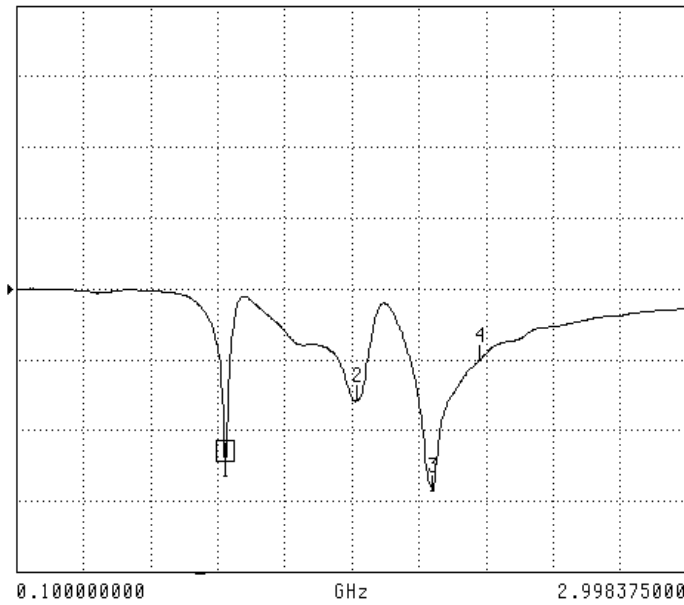

CH 1 - S11  
REFERENCE PLANE  
0.0000 mm


MARKER 1  
1.003437500 GHz  
-26.470 dB

MARKER TO MAX  
▶MARKER TO MIN

2 1.571312500 GHz  
-15.852 dB  
3 1.899500000 GHz  
-28.509 dB  
4 2.102312500 GHz  
-10.127 dB

MARKER READOUT  
FUNCTIONS

S11 FORWARD REFLECTION  
IMPEDANCE

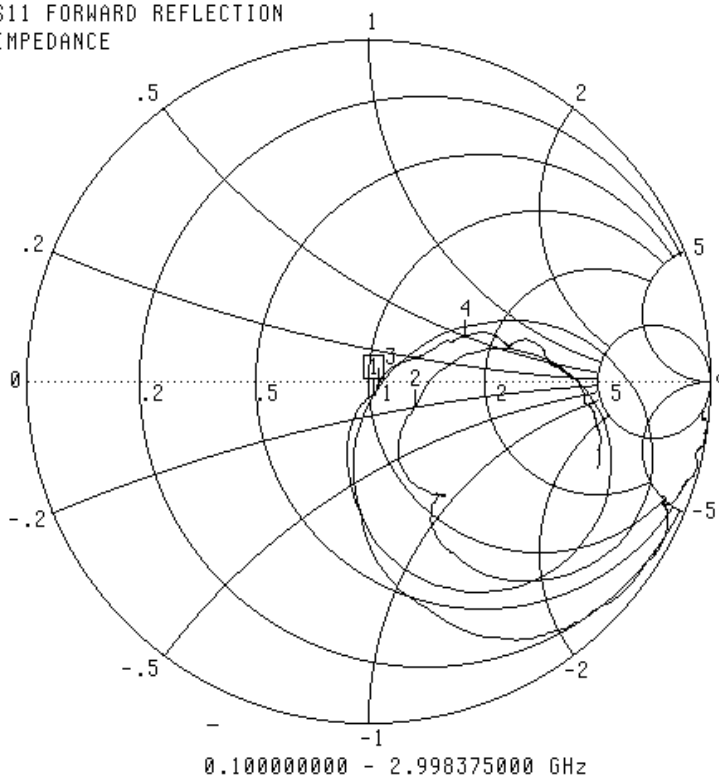

CH 1 - S11  
REFERENCE PLANE  
0.0000 mm

MARKER 1  
1.003437500 GHz  
51.730 Ω  
-4.515 jΩ

MARKER TO MAX  
▶MARKER TO MIN

2 1.571312500 GHz  
65.462 Ω  
-10.503 jΩ  
3 1.899500000 GHz  
53.446 Ω  
-1.792 jΩ  
4 2.102312500 GHz  
85.346 Ω  
24.220 jΩ

MARKER READOUT  
FUNCTIONS

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Antennas](#) category:*

*Click to view products by [Rainsun](#) manufacturer:*

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W6102B0100](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#)  
[A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [A75-](#)  
[001](#) [W3118A](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [C37](#) [MAF94051](#) [FRX380](#) [MA9-5N](#)  
[B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [PSQ24495-91RSM](#) [5200232](#) [MIKROE-2393](#) [DA5-32RADOME](#)  
[5200227](#) [GPSCPMM00](#) [W1049B030](#) [SPDA17RP918](#) [GPSCP00](#) [AN 303](#) [ANTDOM-05-01-WPM](#) [EXW30BNX](#)  
[OSCAR1A/5M/SMAM/S/S/31](#)