# Fast recovery diode RF051VA2S

## Applications

High speed switching


## ● Features

- 1) Small mold type (TUMD2)
- 2) Ultra high switching speed
- 3) High reliability.


#### Constructure


Silicon epitaxial planar

# ●Dimensions (Unit:mm)

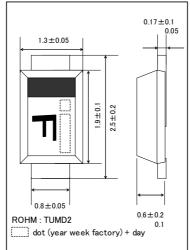


## ●Land size figure (Unit : mm)





## ●Taping dimensions (Unit: mm)

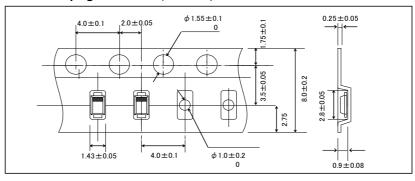

## ● Absolute maximum ratings (Ta=25°C)


Parameter	Symbol	Limits	Unit
Reverse voltage (repetitive)	$V_{RM}$	200	V
Reverse voltage (DC)	$V_R$	200	V
Average rectified forward current	lo	0.5	Α
Forward current surge peak (60Hz-1cyc)	I <sub>FSM</sub>	5	Α
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C


# ●Electrical characteristic (Ta=25°C)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Forward voltage	$V_{F}$	-	-	0.98	V	I <sub>F</sub> =0.5A
Reverse current	I <sub>R</sub>	-	-	10	μΑ	V <sub>R</sub> =200V
Reverse recovery time	trr	-	-	25	ns	I <sub>F</sub> =0.5A,I <sub>R</sub> =1A,Irr=0.25*IR



#### •Electrical characteristic curves

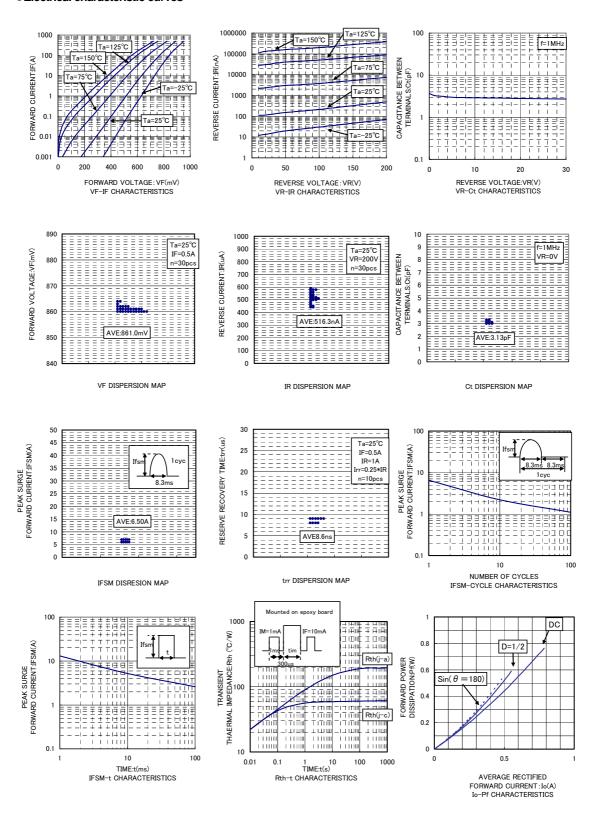

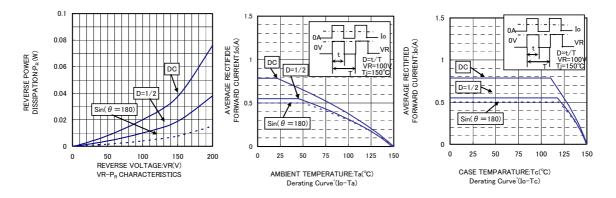



ESD DISPERSION MAP

#### **Notes**

- No technical content pages of this document may be reproduced in any form or transmitted by any
  means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
  use and operation. Please pay careful attention to the peripheral conditions when designing circuits
  and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
  otherwise dispose of the same, no express or implied right or license to practice or commercially
  exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

70HFR40 RL252-TP 150KR30A 1N5397 NTE5841 NTE6038 SCF5000 1N4002G 1N4005-TR JANS1N6640US 481235F
RRE02VS6SGTR 067907F MS306 70HF40 T85HFL60S02 US2JFL-TP A1N5404G-G CRS04(T5L,TEMQ) ACGRA4007-HF
ACGRB207-HF CLH03(TE16L,Q) ACGRC307-HF ACEFC304-HF NTE6356 NTE6359 NTE6002 NTE6023 NTE6039 NTE6077
85HFR60 40HFR60 70HF120 85HFR80 D126A45C SCF7500 D251N08B SCHJ22.5K SM100 SCPA2 SCH10000 SDHD5K VS12FL100S10 ACGRA4001-HF D1821SH45T PR D1251S45T NTE5990 NTE6358 NTE6162 NTE5850