

TECHNICA	AL DATA SHEET	Rosenberger		
BNC 50 Ω	INSULATION RING	51 Z 322-000		

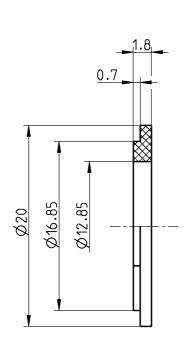

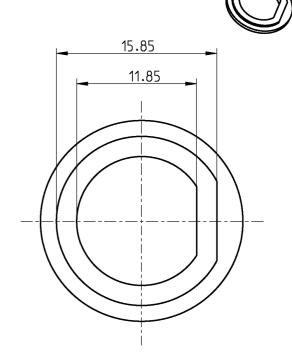

All dimensions are in mm; tolerances according to ISO 2768 m-H

Documents Panel piercing	B 103	
Material and plating Connector parts Body	Material PS	Plating
Mechanical data Recommended torque	max 2 Nm	
Environmental data RoHS	compliant	
Weight Weight	0.3 g/pc	

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

_									
	Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
ſ	Anne Barbet	26/01/09	Sa. Krautenbacher	18.03.14		d00	14-0352	T. Krojer	18.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG							el.: +49 8684 18-0		Page
	P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de						Fax: +49 8684 18-499		
1							mail: info@rosenberger.de		1 / 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connector Accessories category:

Click to view products by Rosenberger manufacturer:

Other Similar products are found below:

89674-0712 F702RX24 FERRULE-174 R141802000 R141805000 R141842000 R161862000 R161862000 R280752000 R280907000 R694261906 RFI21-13 RFI75-13-D2 RFI75-4-D2 AX102906 AX102907 18097-0013 HP-375 HP-500 2098-0294-00 2098-3251-94 KA-81-05 89674-0805 F1 FERRULE-223 202102-11 213337-1 220222-2 24092671A 24092678A R280468000 R280510000 R282862060 RFI155-1 RFI25-12-D3 RFI25-5-D3 RFI75-12-D2 RFI75-2-D2 RFI75-4-D3 RFI77-6 360HS001M2508M6 4-1532137-4 5-21085-0 105274-1000 111062-0490 112122-SOD-LUG 112-NUT-KNURL IPP-2014 R280490020