

Drg No :- C 44061

INSTALLATION DRAWING

ISSUE	REVISION	DATE
1	FIRST ISSUE	10/7/00

SPECIFICATION

ACTUATING FORCE :- 0.7N [2.5ozf] MAX

RELEASE FORCE :- 0.09N [0.32ozf] MIN

FREE POSITION :- 12.4 [0.49] MAX

OPERATING POSITION :- 10.9±0.85 [0.43]

MOVEMENT DIFFERENTIAL :- 0.45 [0.018] MAX

OVERTRAVEL (AVAILABLE) :- DEPRESS TO CASE

TESTED AND STAMPED TO UL & CSA REQUIREMENTS

APPROVAL RATING :-
5AMP - 250 V.A.C.


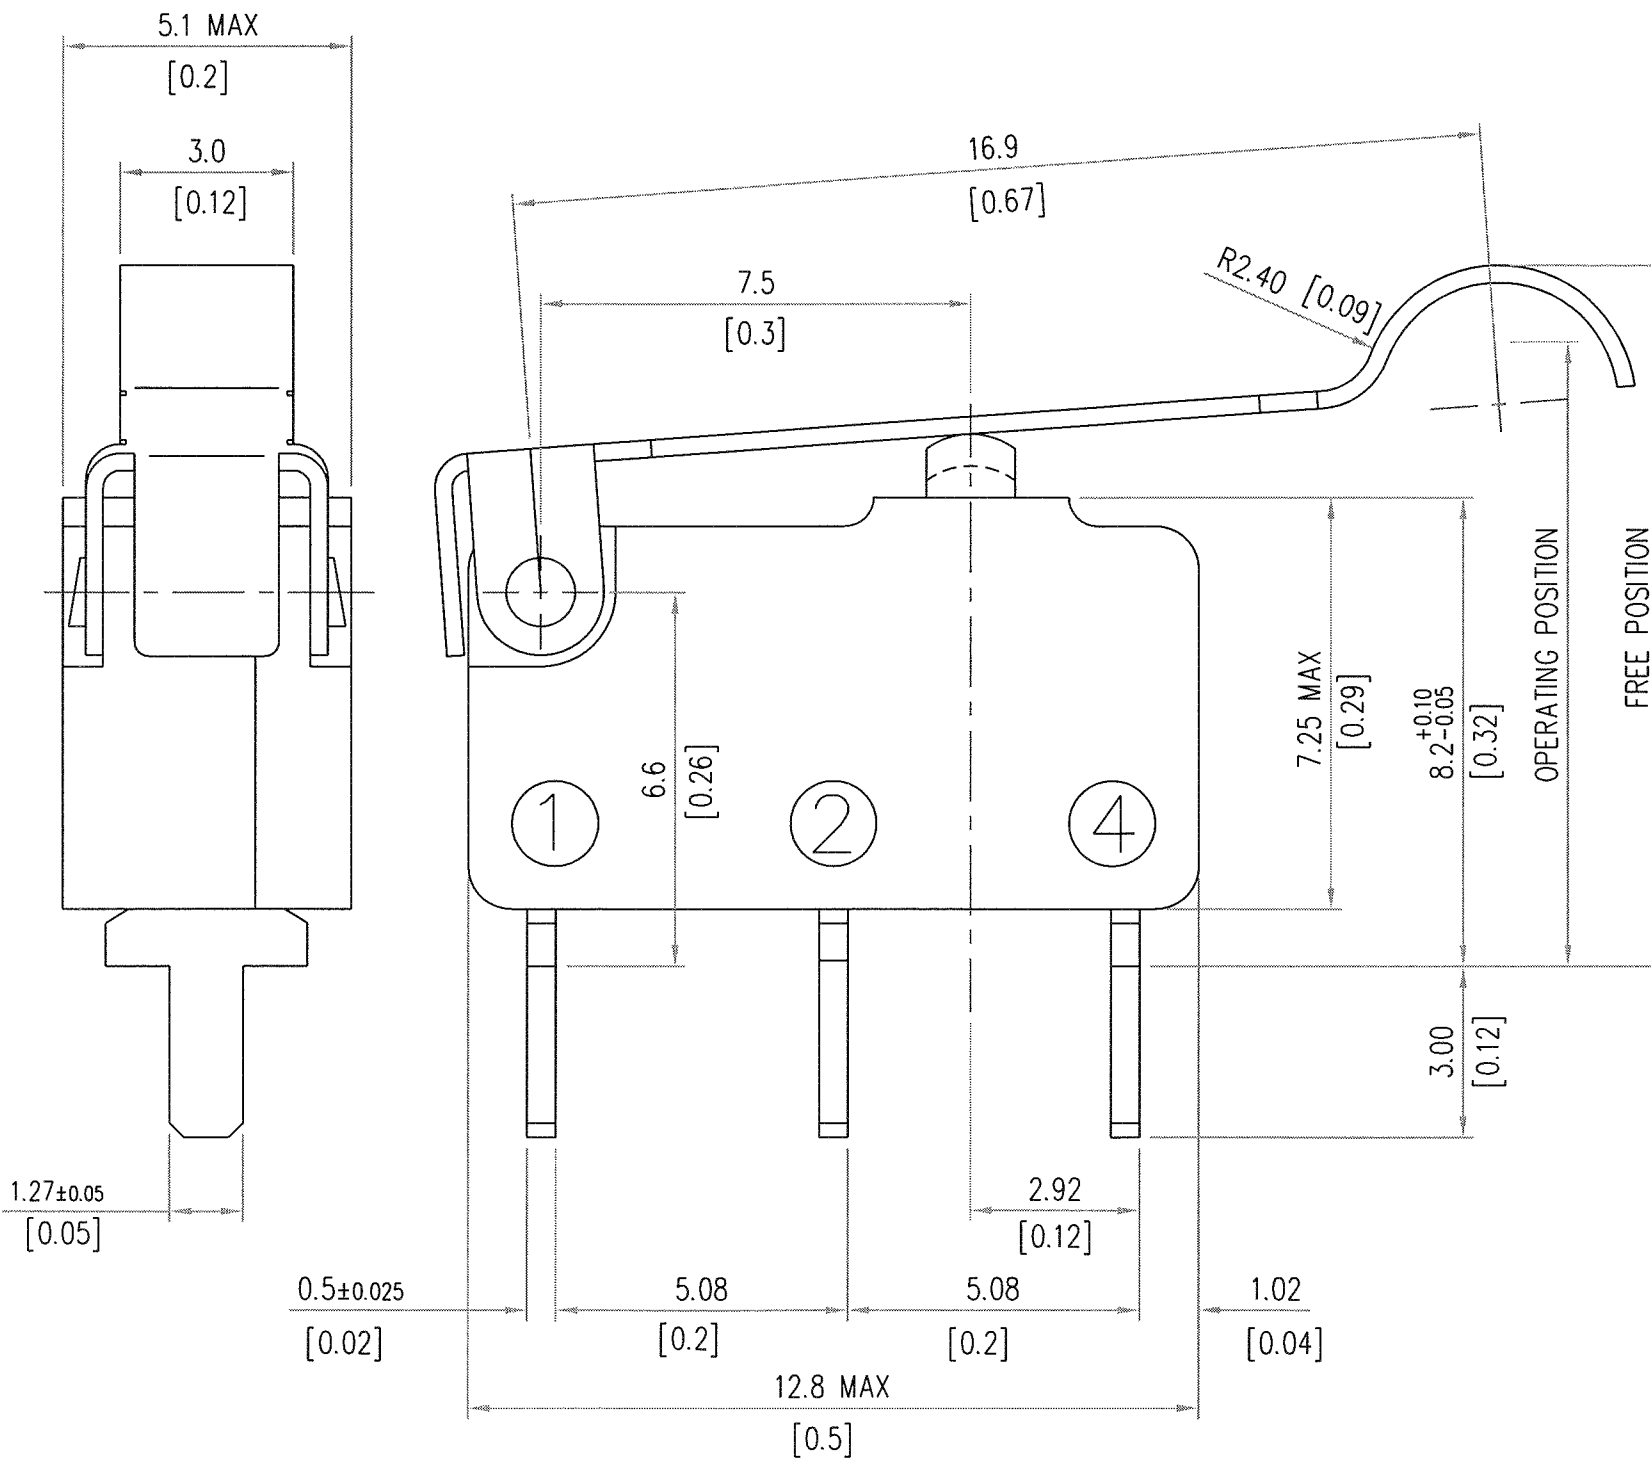


DIAGRAM OF CONNECTIONS

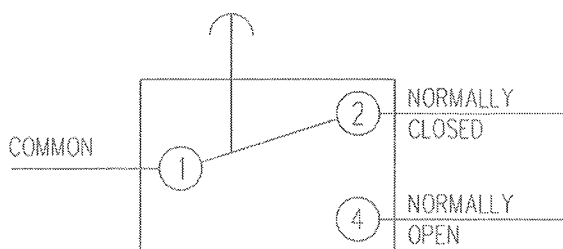

DEGREE OF PROTECTION :- ENCLOSURE IEC IP40

24 OCT 2000

SAIA-Burgess Electronics

SWITCHES • MOTORS • CONTROLLERS

SAIA-Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322



DO NOT SCALE !
This drawing must only be amended on CAD system

TOLERANCES UNLESS STATED:-
NO DECIMAL PLACE ±0.50 1 DECIMAL PLACES ± 0.25
2 DECIMAL PLACES ±0.15 ANGULAR ±1°
INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

DRAWN

T.BELL.

Approved

DATE

10/7/00

DRAWING OFFICE

SCALE

8:1

ENGINEERING

DATE ISSUED

QUALITY ASSURANCE

TITLE / DESCRIPTION

F5T8YC UL

Drg No :- C 44061

A3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [Saia-Burgess](#) manufacturer:

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)