


# Power Inductor; CIG Series

## DC-DC converter Type

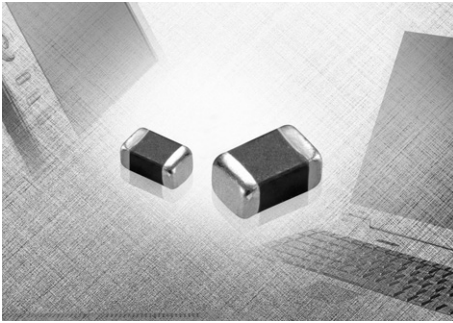


### General Features

- Low profile (1.0mm max height)
- Magnetically shielded and Low DC resistance
- Lead free termination and internal electrode
- Monolithic structure for high reliability

### Application

- Mobile phones, DSC, DVC, PDA etc. for DC-DC Converter

### Dimensions

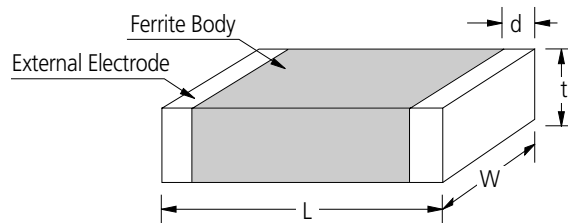

SIZE CODE	Dimension (mm)			
	L	W	t	d
CIG10F Series	1.6±0.15	0.8±0.15	0.5 max	0.1~0.5
CIG10W Series	1.6±0.15	0.8±0.15	0.8 max	0.1~0.5
CIG21F Series	2.0±0.1	1.25±0.1	0.5 max	0.2~0.7
CIG21W Series	2.0±0.2	1.25±0.2	1.0 max	0.2~0.7
CIG21L Series	2.0±0.1	1.25±0.1	1.0 max	0.2~0.7
CIG21C Series	2.0±0.1	1.25±0.1	1.0 max	0.2~0.7
CIG22L Series	2.5±0.2	2.0±0.2	1.0 max	0.3~0.8
CIG22H Series	2.5±0.2	2.0±0.2	1.2 max	0.3~0.8
CIG22B Series	2.5±0.2	2.0±0.2	1.0 max	0.3~0.8

### Part Numbering


**CI G 22 L 4R7 M N E**  
 (1) (2) (3) (4) (5) (6) (7) (8)

- (1) Chip inductor
- (2) Power inductor
- (3) Dimensions (10:1608, 21:2012, 22:2520)
- (4) Product Series (W: Normal Type, L: Low Rdc Type, F: Low profile Type, H: High Current Type, B: High Current & Low Profile Type)
- (5) Inductance (R47: 0.47uH, 2R2: 2.2uH, 4R7: 4.7uH)
- (6) Tolerance (M: ±20%)
- (7) Thickness Option (N: Standard, A: Thinner than standard, B: Thicker than standard)
- (8) Package Style (C: Paper tape / 7" reel, E: Embossed tape / 7" reel)


**CIG 1608(0603) Type - Low Profile**

Part No.	Inductance ( $\mu$ H) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. I <sub>dc</sub> (A) $\Delta T = 40^\circ\text{C}$
CIG10FR47MNC	0.47 $\pm$ 20 %	0.20 $\pm$ 30 %	0.80
CIG10F1R0MNC	1.0 $\pm$ 20 %	0.30 $\pm$ 30 %	0.70
CIG10F1R5MNC	1.5 $\pm$ 20 %	0.35 $\pm$ 30 %	0.60
CIG10F2R2MNC	2.2 $\pm$ 20 %	0.45 $\pm$ 30 %	0.50

**INDUCTANCE**

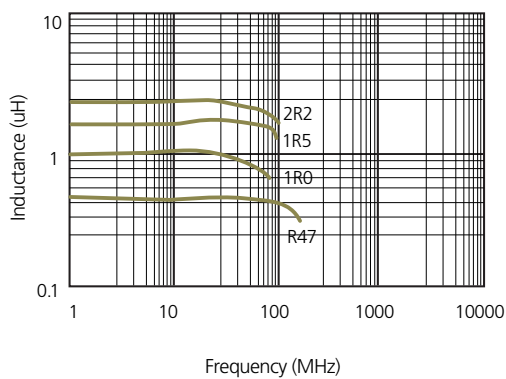


**DC BIAS CHARACTERISTIC**

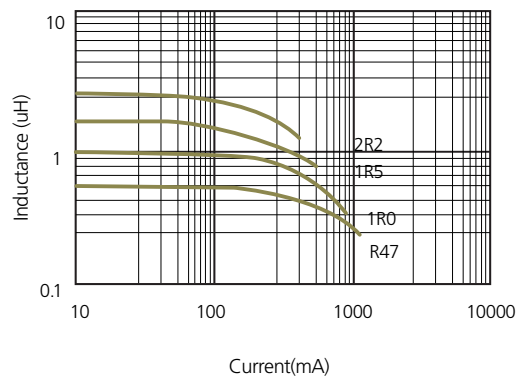


**CIG 1608(0603) Type**

Part No.	Inductance ( $\mu$ H) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. I <sub>dc</sub> (A) $\Delta T = 40^\circ\text{C}$
CIG10WR47MNC	0.47 $\pm$ 20 %	0.15 $\pm$ 20 %	1.10
CIG10W1R0MNC	1.0 $\pm$ 20 %	0.20 $\pm$ 20 %	0.95
CIG10W1R5MNC	1.5 $\pm$ 20 %	0.25 $\pm$ 20 %	0.80
CIG10W2R2MNC	2.2 $\pm$ 20 %	0.30 $\pm$ 20 %	0.75
CIG10W3R3MNC	3.3 $\pm$ 20 %	0.40 $\pm$ 20 %	0.70
CIG10W4R7MNC	4.7 $\pm$ 20 %	0.50 $\pm$ 20 %	0.62

**INDUCTANCE**

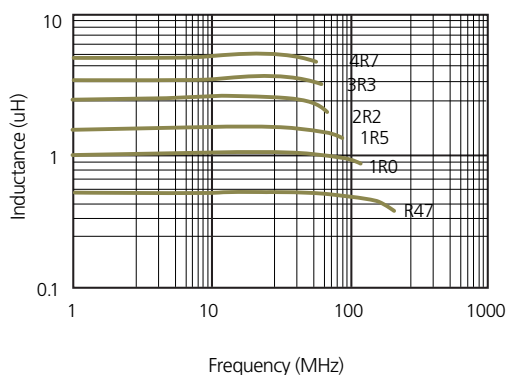

**DC BIAS CHARACTERISTIC**

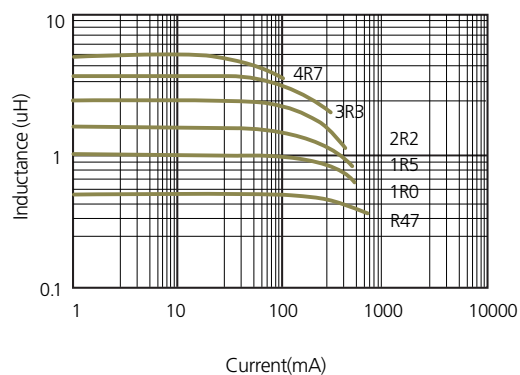





### CIG 2012(0805) Type - Low Profile

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG21FR47MNC	$0.47 \pm 20\%$	$0.12 \pm 25\%$	1.10
CIG21F1R0MNC	$1.0 \pm 20\%$	$0.19 \pm 25\%$	0.80
CIG21F1R5MNC	$1.5 \pm 20\%$	$0.25 \pm 25\%$	0.70
CIG21F2R2MNC	$2.2 \pm 20\%$	$0.34 \pm 25\%$	0.60

INDUCTANCE

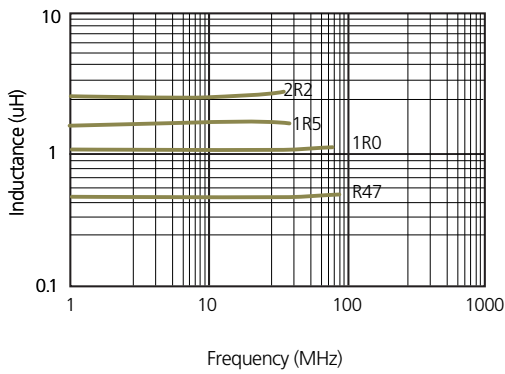


DC BIAS CHARACTERISTIC

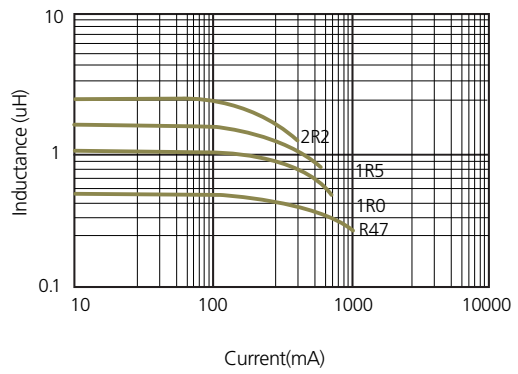


### CIG 2012(0805) Type

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG21W1R0MNE	$1.0 \pm 20\%$	$0.13 \pm 20\%$	1.05
CIG21W1R5MNE	$1.5 \pm 20\%$	$0.15 \pm 20\%$	0.96
CIG21W2R2MNE	$2.2 \pm 20\%$	$0.20 \pm 20\%$	0.81
CIG21W3R3MNE	$3.3 \pm 20\%$	$0.25 \pm 20\%$	0.73
CIG21W4R7MNE	$4.7 \pm 20\%$	$0.30 \pm 20\%$	0.65

INDUCTANCE

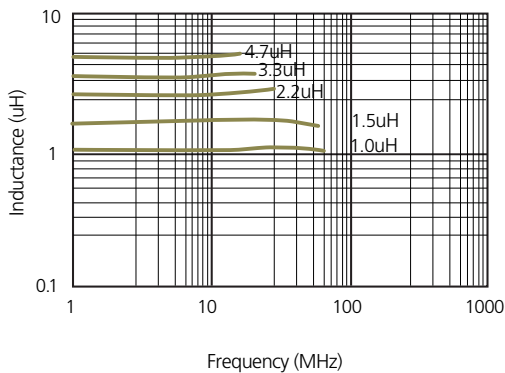


DC BIAS CHARACTERISTIC

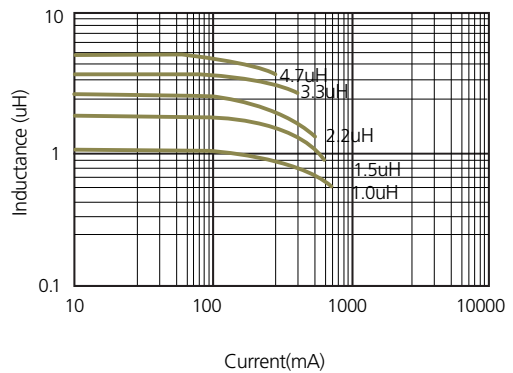


**CIG 2012(0805) Type - Low RDC**

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG21LR47MNE	$0.47 \pm 20\%$	$0.08 \pm 20\%$	1.30
CIG21L1R0MNE	$1.0 \pm 20\%$	$0.11 \pm 20\%$	1.15
CIG21L1R5MNE	$1.5 \pm 20\%$	$0.14 \pm 20\%$	1.05
CIG21L2R2MNE	$2.2 \pm 20\%$	$0.16 \pm 20\%$	0.95
CIG21L3R3MNE	$3.3 \pm 20\%$	$0.22 \pm 20\%$	0.80
CIG21L4R7MNE	$4.7 \pm 20\%$	$0.26 \pm 20\%$	0.75

**INDUCTANCE**

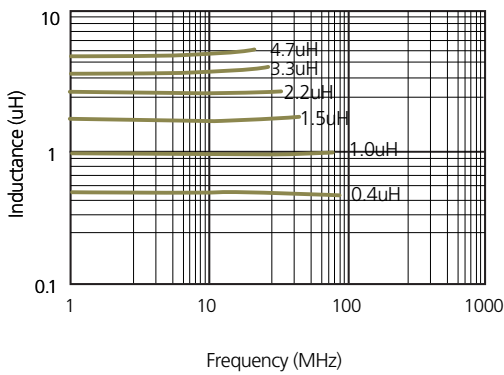


**DC BIAS CHARACTERISTIC**

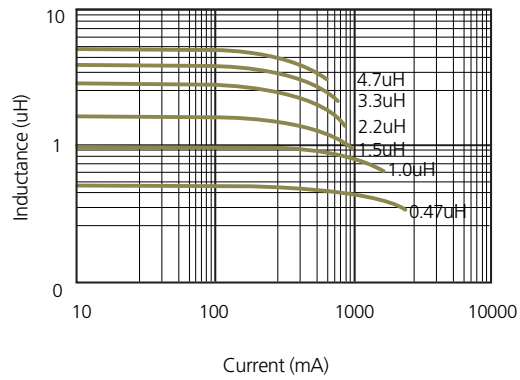


**CIG 2012(0805) Type - Choke**

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG21C2R2MNE	$2.2 \pm 20\%$	$0.25 \pm 20\%$	0.77
CIG21C4R7MNE	$4.7 \pm 20\%$	$0.43 \pm 20\%$	0.58

**INDUCTANCE**

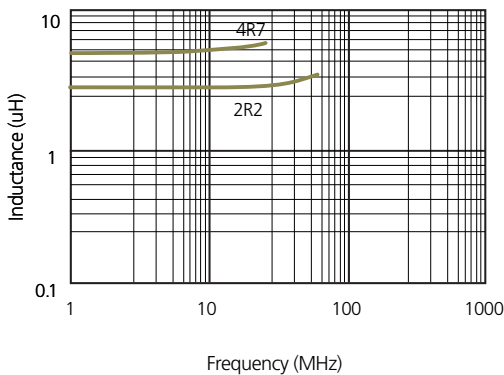



**DC BIAS CHARACTERISTIC**

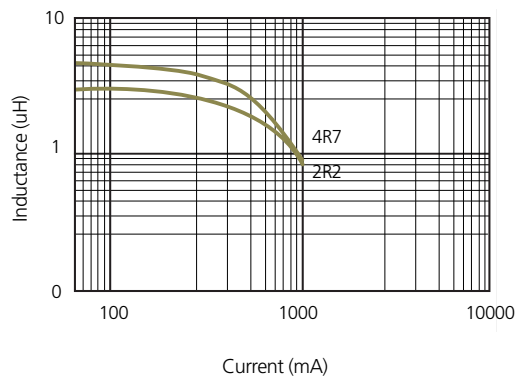





### CIG 2520(1008) Type - High Current

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) Typ. $\Delta T = 40^\circ\text{C}$
CIG22H1R0MNE	$1.0 \pm 20\%$	$0.083 \pm 20\%$	2.0
CIG22H2R2MNE	$2.2 \pm 20\%$	$0.116 \pm 20\%$	1.6
CIG22H3R3MNE	$3.3 \pm 20\%$	$0.133 \pm 20\%$	1.5
CIG22H4R7MNE	$4.7 \pm 20\%$	$0.233 \pm 20\%$	1.0

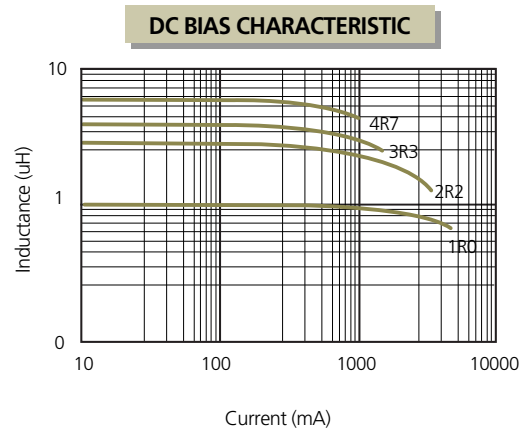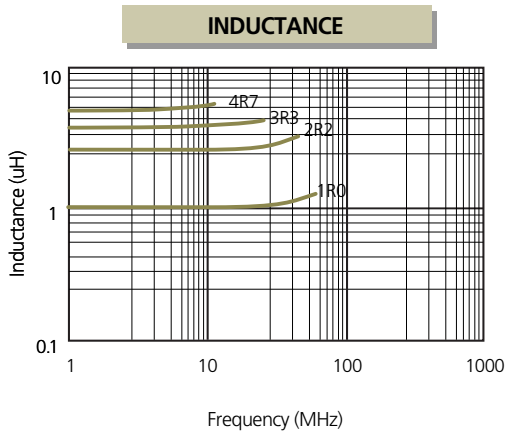

### CIG 2520(1008) Type - High Current and Low Profile



Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG22B1R0MNE	$1.0 \pm 20\%$	$0.12 \pm 20\%$	1.2
CIG22B2R2MNE	$2.2 \pm 20\%$	$0.18 \pm 20\%$	1.1
CIG22B3R3MNE	$3.3 \pm 20\%$	$0.21 \pm 20\%$	1.05
CIG22B4R7MNE	$4.7 \pm 20\%$	$0.25 \pm 20\%$	1.0

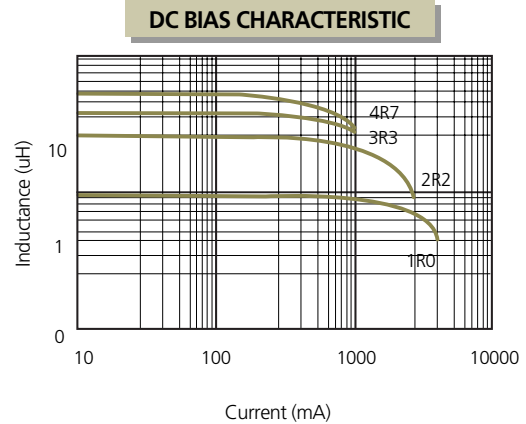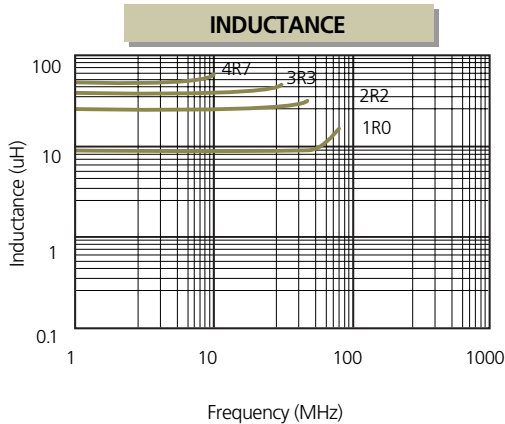

**CIG 2520(1008) Type - Low RDC**

Part No.	Inductance ( $\mu\text{H}$ ) @1MHz	DC Resistance ( $\Omega$ )	Rated Current. Idc (A) $\Delta T = 40^\circ\text{C}$
CIG22L1R0MNE	1.0 $\pm$ 20 %	0.06 $\pm$ 25 %	1.6
CIG22L1R2MNE	1.2 $\pm$ 20 %	0.065 $\pm$ 25 %	1.5
CIG22L1R5MNE	1.5 $\pm$ 20 %	0.07 $\pm$ 25 %	1.5
CIG22L2R2MNE	2.2 $\pm$ 20 %	0.08 $\pm$ 25 %	1.3
CIG22L3R3MNE	3.3 $\pm$ 20 %	0.10 $\pm$ 25 %	1.2
CIG22L4R7MNE	4.7 $\pm$ 20 %	0.11 $\pm$ 25 %	1.1
CIG22L6R8MNE	6.8 $\pm$ 20 %	0.20 $\pm$ 30 %	0.8
CIG22L100MNE	10.0 $\pm$ 20 %	0.32 $\pm$ 30 %	0.6

\* Test equipment: Agilent 4291B+16193A

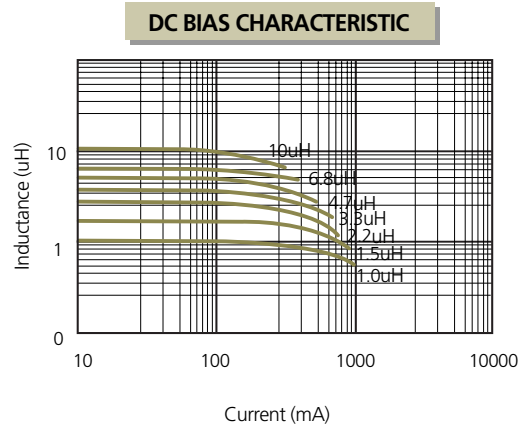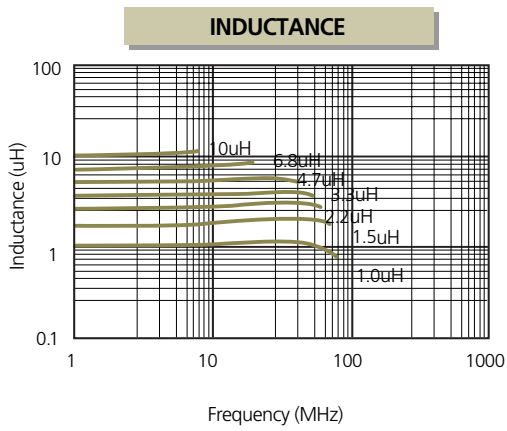

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT category](#):*

*Click to view products by [Samsung manufacturer](#):*

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)  
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)  
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)  
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)  
[KHC201E225M76N0T00](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#) [1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#)  
[2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#) [CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#)  
[CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#) [CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#)  
[CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#) [CGA3E1X7R1C474K](#)  
[CGA3E2C0G1H561JT0Y0N](#)