



SMPM TO 65 GHz

SMPM Ganged Block: GPPB

Mates With:
PRFIA



GPPB	GENDER	NO. OF ROWS	NO. OF POSITIONS	PLATING	ST	SM	CHANNEL PITCH
	-PF = Plug Full Detent -PS = Plug Smooth Bore -PC = Catcher's Mitt	-1	-02, -04, -06, -08, -10	-EG = 50 μ" (1.27 μm) heavy Gold center contact, 10 μ" (0.25 μm) Gold outer body			-1N = 3.56 mm (.140") Pitch

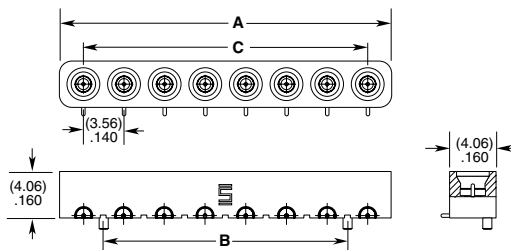

GPPB-PF-1-08-EG-ST-SM-1N SHOWN

NO. OF POSITIONS	A	B	C
-02	(7.62) .300	N/A	(3.56) .140
-04	(14.73) .580	(7.11) .280	(10.67) .420
-06	(21.84) .860	(14.22) .560	(17.78) .700
-08	(28.96) 1.14	(21.34) .840	(24.89) .980
-10	(36.07) 1.42	(28.45) 1.12	(32.00) 1.26

ALSO AVAILABLE

(8.33 mm) .328" Pitch
(5.08 mm) .200" Pitch
Edge Mount termination
Contact: RFGroup@samtec.com


DUAL PORT SOLDERLESS COMPRESSION MOUNT

SMPM Ganged Block: GPPC

Mates With:
GC47, GC86, PRFIA



GPPC	GENDER	1	2	PLATING	ORIENTATION	TERMINATION	PACKAGING
	-PF = Plug Full Detent -PS = Plug Smooth Bore			-EP = 50 μ" (1.27 μm) heavy Gold center contact, Passivated outer body	-ST = Straight	-CMM = Compression Mount	Leave blank for individually bagged -B = Full Tray (Multiples of 100 required)

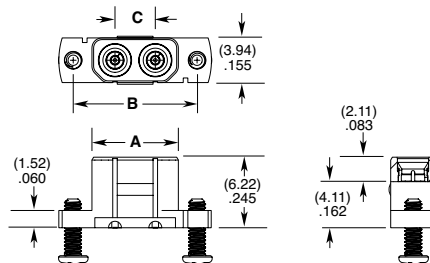

GPPC-PX-1-2-EP-ST-CMM-X SHOWN

NO. OF POSITIONS	A	B	C
-02	(7.62) .300	(10.92) .430	(3.56) .140

Adaptors or visit Samtec.com?PRFIA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[89674-0827](#) [6059674-1](#) [630059-000](#) [6501-1071-002](#) [6769](#) [7002-1541-010](#) [7002-1572-002](#) [7004-1512-000](#) [7009-1511-004](#) [7101-1541-010](#)
[7101-1571-002](#) [7105-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-040](#) [7242-1511-000](#) [7405-1521-005](#) [7405-1521-802](#)
[804S01D04M040](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [PL11C-026](#) [PL40-36](#) [9408-1113-000](#) [980-](#)
[8666-005](#) [11 SMA-50-2-6 / 111 NE](#) [11 SMA-50-3-6 / 111 NE](#) [1-201144-1](#) [120919](#) [R107003010W](#) [R112186000](#) [R113053000W](#) [R113082097](#)
[R113236000](#) [R114083000](#) [R114670000W](#) [R123415000W](#) [R124076320](#) [R124076450](#) [R124175123](#) [R125075000W](#) [R125075001](#)
[R125172000W](#) [R125415030](#) [R141007161](#)