


Product availability: Stock - Normally stocked in distribution facility

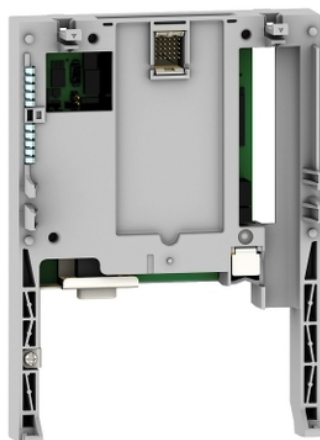

### Main

|                              |  |
|------------------------------|--|
| Product or component type    | Communication card   |
| Range compatibility          | Altivar 71<br>Altivar 61Q<br>Altivar 71Q<br>Altivar 61   |
| Communication port protocol  | Modbus TCP   |
| Product specific application | For daisy chain mounting   |
| Connector type               | 1 RJ45   |
| Transmission rate            | 10 Mbps<br>100 Mbps  |
| Physical interface           | Ethernet 2   |
| Web services                 | Altivar chart<br>FDR Agent<br>Altivar viewer<br>Ethernet statistics<br>IO Scanner<br>Data editor<br>E-mail<br>Security |

### Complementary

|                              |   |
|------------------------------|---|
| Exchange mode                | Half duplex and full duplex   |
| Communication data link      | MAC : IEEE 802.3<br>LLC : IEEE 802.2  |
| Communication network type   | IP conforming to RFC791   |
| Communication transport type | 8 connections maximum<br>TCP conforming to RFC793<br>UDP  |
| Concept                      | Transparent Ready class C20   |
| Web server                   | Embedded  |
| Communication service        | CiA 402 profile<br>Communication monitoring can be inhibited, adjustable<br>Diagnostics (08)<br>FTP<br>I/O profile<br>I/O scanning service can be inhibited<br>Read device identification (43)<br>Read holding registers (03)<br>Read input registers (04)<br>Read/Write multiple registers (23)<br>SNMP<br>TFTP<br>Write multiple registers (16)<br>Write single register (06) |
| Display type                 | 1 LED 10/100 Mbps (speed)<br>1 LED FLT (Ethernet fault)<br>1 LED RX (reception)<br>1 LED STS (IP address)<br>1 LED TX (transmission)<br>Graphic display terminal control word received<br>Graphic display terminal reference received<br>Web server   |
| Product weight               | 0.66 lb(US) (0.3 kg)  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

### Ordering and shipping details

|                       |                              |
|-----------------------|------------------------------|
| Category              | 22135 - ATV61-71 ACCESSORIES |
| Discount Schedule     | CP4C                         |
| GTIN                  | 00785901538646               |
| Nbr. of units in pkg. | 1                            |
| Package weight(Lbs)   | 0.65000000000000002          |
| Returnability         | Y                            |
| Country of origin     | ID                           |

### Offer Sustainability

|                           |  |
|---------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including:   |
| ----- Substance 1         | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| ----- Substance 2         | Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm.                  |
| ----- More information    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)