

## Miniature Surface-Mount Contacts

### SM-204Q/BR

1" (25mm) Gap, Closed Loop., Center Leads, Brown

### SM-204Q/W

1" (25mm) Gap, Closed Loop, Center Leads, White

#### Features:

- Miniature "flange type" surface-mount magnetic contacts perfect for sliding doors and windows where space is limited
- Screw or adhesive mount (adhesive backing tape included)
- Mounting flange breaks off for extra miniature size
- High-impact weatherproof ABS plastic case
- Contact reed switch is SPST, deactivated rhodium on gold under-plating for a longer expected life
- 1" (25mm) Gap
- 15" (38cm) leads extend from center of switch
- For closed loop circuits
- Mounting screws included
- Lifetime limited warranty




SM-204Q/BR shown



#### Specifications:

Model number	SM-204Q/BR	SM-204Q/W
Circuit type	Closed loop	
Operation gap	1" (25mm)	
Color	Brown	White
Terminals	15" (38cm) leads from center	
Material	Case	High-impact ABS plastic
	Contacts	Deactivated rhodium on gold under-plating
Contact rating	0.1A@100VDC (max)	
	1.0A@10VDC (max)	
	10W (max)	
Temperature	-15°~160°F (-25°~70°C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	1 <sup>3</sup> / <sub>8</sub> "x <sup>3</sup> / <sub>8</sub> "x <sup>1</sup> / <sub>4</sub> " (35x10x6mm)	
Magnet dimensions	1 <sup>3</sup> / <sub>8</sub> "x <sup>3</sup> / <sub>8</sub> "x <sup>1</sup> / <sub>4</sub> " (35x10x6mm)	
Magnet type	Alnico 5	

#### Dimensions:

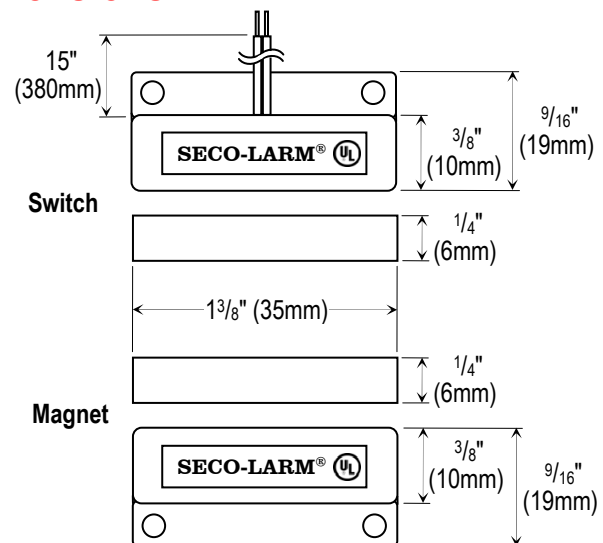

#### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiSM-204Q\_150504.docx

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SECO-LARM](#) manufacturer:*

Other Similar products are found below :

[SD-7202GC-PEQ](#) [SS-040Q WHITE](#) [NE-SE01-020Q](#) [SM-226RQ](#) [E-941SA-1200](#) [CA-1616Q](#) [SS-090-2H1](#) [RA-4961-DSQ](#) [SL-1301-BAQ/B](#)  
[SM-4303-TQ/W](#) [SS-090-2H0](#) [E-936-S45RRGQ](#) [SA-027WQ](#) [SD-997B-GBQ](#) [SL-126Q/A](#) [SM-4201-LQ](#) [SL-1301-BAQ/C](#) [SK-1011-SDQ](#)  
[SM-4601-LQ](#) [SA-025Q](#) [SM-200Q/BR](#) [NJ-P101M-PQ](#) [SL-126Q/B](#) [SL-126Q/C](#) [SM-207-5Q/BR](#) [SL-1301-BAQ/R](#) [SM-4601-L3Q](#) [SL-1312-](#)  
[SA/R](#) [SM-205Q/BR](#) [SM-4105-LQ/B](#) [SS-073Q](#) [SL-126Q/R](#) [SM-216Q/GY](#) [CA-1610-3FLQ](#) [SM-4301-TQW](#) [SM-226LQ](#) [SM-4105-LQ/W](#)  
[CA151T](#) [SM-300Q/W](#) [SM-204Q/W](#) [SM-226L-3Q](#) [E-941SA-80Q](#) [CA-161T](#) [SS-072Q](#)