



Grove - PIR Motion Sensor

SKU 101020020

This is a simple to use PIR(Passive Infrared) motion sensor with Grove compatible interface. Simply connect it to Stem shield and program it, when anyone moves in its detecting range, the sensor outputs HIGH on its SIG pin.

The detecting range and response speed can be adjusted by 2 potentiometers soldered on its circuit board, The response speed is from 0.3s - 25s, and max 6 meters of detecting range.

Specification

- Grove compatible interface
- Voltage range: 3V–5V
- Size: 20mm x 40mm
- Detecting angle: 120 degree
- Detecting distance: max 6m (3m by default)
- Adjustable detecting distance and holding time

Application Ideas

- Motion sensor
- Thief-guarding System
- Switch
- Industrial automation

Documents

For all Grove users (especially beginners), we provide you guidance PDF documents. Please download and read through [Preface - Getting Started](#) and [Introduction to Grove](#) before your using of the product.

Note

Potentiometers are not included.

Technical details


Dimensions	40mm x20mm x15mm
Weight	G.W 12g
Battery	Exclude
Voltage range	3V-5V
Detecting angle	120 degree
Detecting distance	max 6m (3m by default)



Part List

Grove - PIR Motion Sensor	1
---------------------------	---

ECCN/HTS

ECCN	6A002.a.3.f
HSCODE	9031900090
ROHS	1

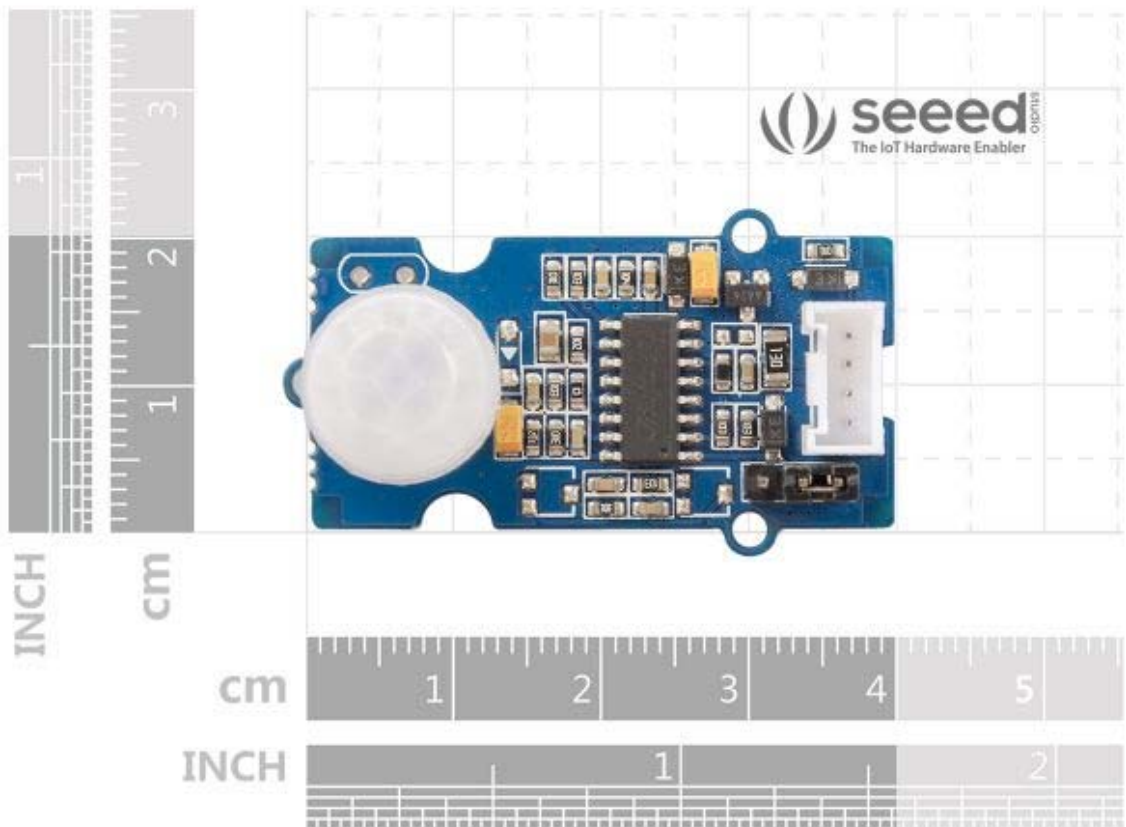

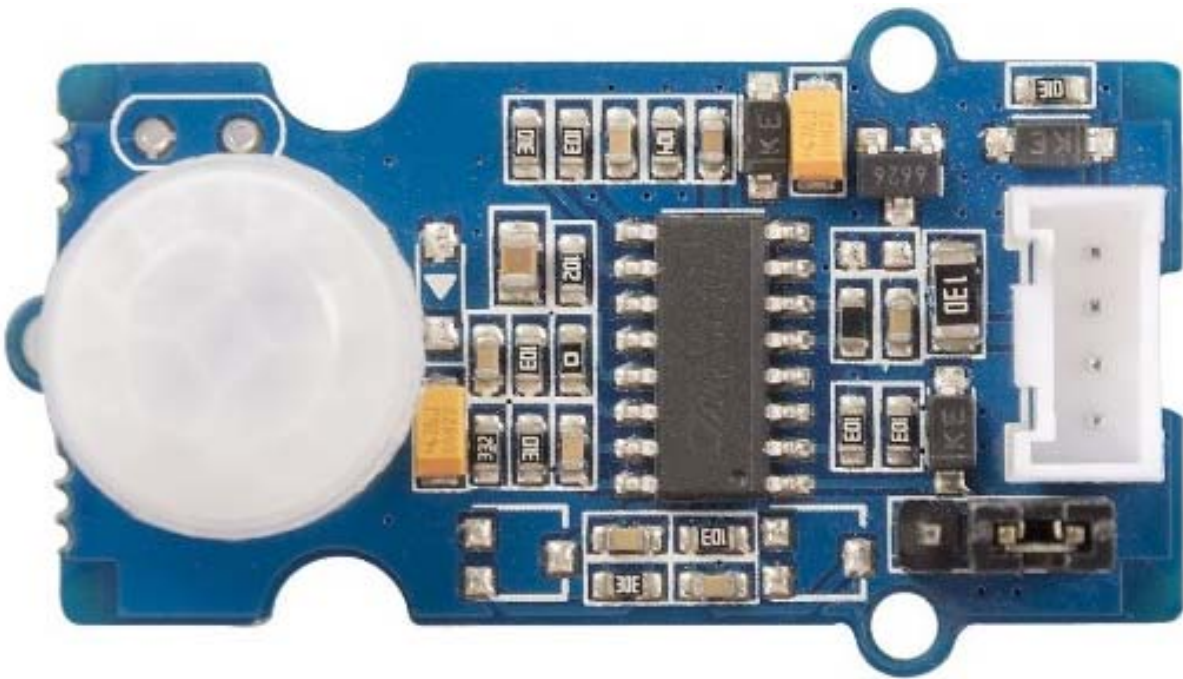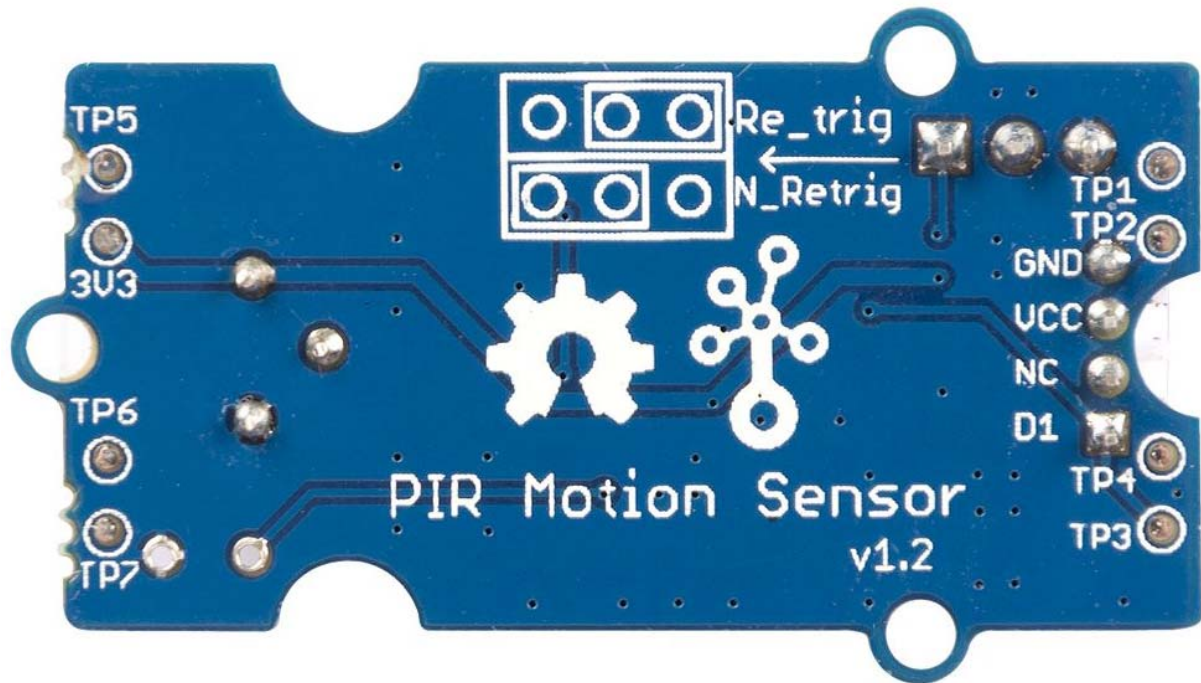

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Position Sensor Development Tools](#) category:

Click to view products by [Seeed Studio](#) manufacturer:

Other Similar products are found below :

[EVAL-ADXRS450Z-S](#) [AS5215 DB](#) [AS5215 AB](#) [1007214](#) [SCA3100-D04-PCB](#) [SCA830-D07-PCB](#) [STEVAL-MKI043V1](#) [EVAL-ADXRS453Z-S](#) [MIKROE-3661](#) [LXE3302AR001](#) [1032](#) [1007214-1](#) [172](#) [178](#) [BOOSTXL-PGA460](#) [ADA4571R-EBZ](#) [EVAL-ADXRS453Z-V](#) [STEVAL-MKI045V1](#) [STEVAL-MKI042V1](#) [STEVAL-MKI037V1](#) [ZEPIR000103KITG](#) [ADIS16060/PCBZ](#) [SEN-08503](#) [SEN-13162](#) [IMX-070](#)