


# 2N3903 / 2N3904

## NPN Silicon Epitaxial Planar Transistor

for switching and amplifier applications.

As complementary types the PNP transistors 2N3905 and 2N3906 are recommended.


On special request, these transistors can be manufactured in different pin configurations.



1. Emitter 2. Base 3. Collector  
TO-92 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^{\circ}\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	60	V
Collector Emitter Voltage	$V_{CEO}$	40	V
Emitter Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_C$	200	mA
Power Dissipation	$P_{tot}$	625	mW
Junction Temperature	$T_j$	150	$^{\circ}\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^{\circ}\text{C}$



**SEMTECH ELECTRONICS LTD.**



ISO 9001 : 2008  
Certificate No. 180713080



ISO 14001 : 2004  
Certificate No. 7116



ISO 9001 : 2008  
Certificate No. 50713410



BS-OHSAS 18001 : 2007  
Certificate No. 7116




IECQ QC 080000  
Certificate No. PRC-18294-1483-1

## 2N3903 / 2N3904

### Characteristics at $T_a = 25^\circ\text{C}$

Parameter		Symbol	Min.	Max.	Unit
DC Current Gain					
at $V_{CE} = 1\text{ V}$ , $I_C = 0.1\text{ mA}$	2N3903	$h_{FE}$	20	-	-
	2N3904	$h_{FE}$	40	-	-
at $V_{CE} = 1\text{ V}$ , $I_C = 1\text{ mA}$	2N3903	$h_{FE}$	35	-	-
	2N3904	$h_{FE}$	70	-	-
at $V_{CE} = 1\text{ V}$ , $I_C = 10\text{ mA}$	2N3903	$h_{FE}$	50	150	-
	2N3904	$h_{FE}$	100	300	-
at $V_{CE} = 1\text{ V}$ , $I_C = 50\text{ mA}$	2N3903	$h_{FE}$	30	-	-
	2N3904	$h_{FE}$	60	-	-
at $V_{CE} = 1\text{ V}$ , $I_C = 100\text{ mA}$	2N3903	$h_{FE}$	15	-	-
	2N3904	$h_{FE}$	30	-	-
Collector Base Cutoff Current at $V_{CB} = 30\text{ V}$		$I_{CBO}$	-	50	nA
Emitter Base Cutoff Current at $V_{EB} = 6\text{ V}$		$I_{EBO}$	-	50	nA
Collector Base Breakdown Voltage at $I_C = 10\text{ }\mu\text{A}$		$V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$		$V_{(BR)CEO}$	40	-	V
Emitter Base Breakdown Voltage at $I_E = 10\text{ }\mu\text{A}$		$V_{(BR)EBO}$	6	-	V
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$ at $I_C = 50\text{ mA}$ , $I_B = 5\text{ mA}$		$V_{CE(sat)}$ $V_{CE(sat)}$	- -	0.2 0.3	V
Base Emitter Saturation Voltage at $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$ at $I_C = 50\text{ mA}$ , $I_B = 5\text{ mA}$		$V_{BE(sat)}$ $V_{BE(sat)}$	- -	0.85 0.95	V
Gain Bandwidth Product at $V_{CE} = 20\text{ V}$ , $I_C = 10\text{ mA}$ , $f = 100\text{ MHz}$	2N3903 2N3904	$f_T$	250 300	- -	MHz
Collector Base Capacitance at $V_{CB} = 5\text{ V}$ , $f = 100\text{ KHz}$		$C_{ob}$	-	4	pF
Delay Time at $V_{CC} = 3\text{ V}$ , $V_{BE} = 0.5\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = 1\text{ mA}$		$t_d$	-	35	ns
Rise Time at $V_{CC} = 3\text{ V}$ , $V_{BE} = 0.5\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = 1\text{ mA}$		$t_r$	-	35	ns
Storage Time at $V_{CC} = 3\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = 1\text{ mA}$		$t_s$	-	200	ns
Fall Time at $V_{CC} = 3\text{ V}$ , $I_C = 10\text{ mA}$ , $I_{B1} = -I_{B2} = 1\text{ mA}$		$t_f$	-	50	ns



**SEMTECH ELECTRONICS LTD.**



ISO 9001 : 2008  
Certificate No. 180713000



ISO 14001 : 2004  
Certificate No. 7116



ISO 9001 : 2008  
Certificate No. 50713410








BS-OHSAS 18001 : 2007  
Certificate No. 7116



IECQ QC 080000  
Certificate No. PRC-18294-1483-1

Dated : 09/08/2016 Rev:02

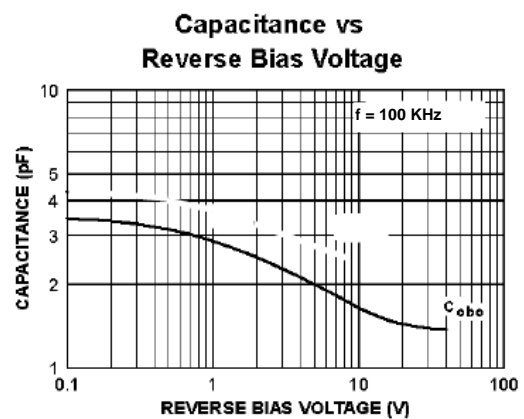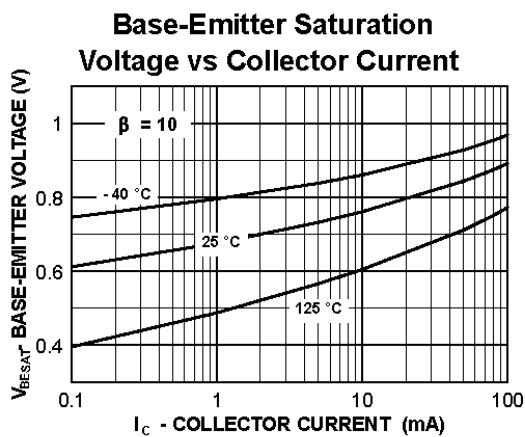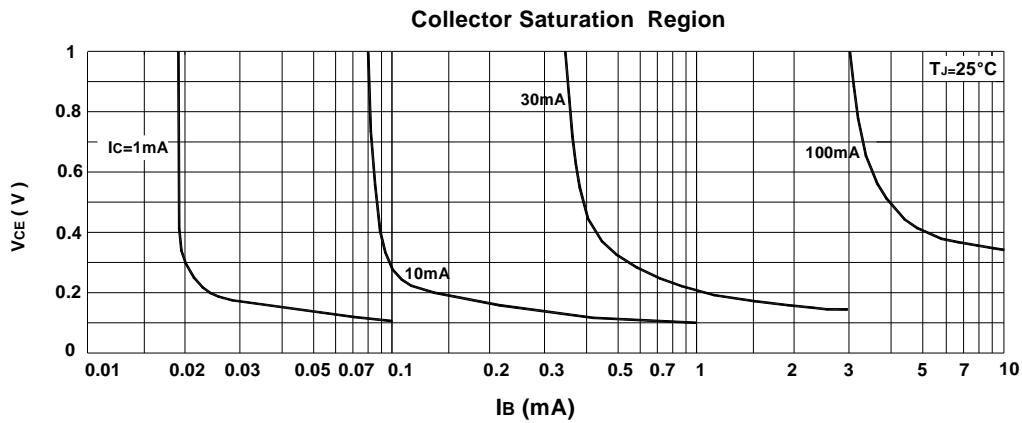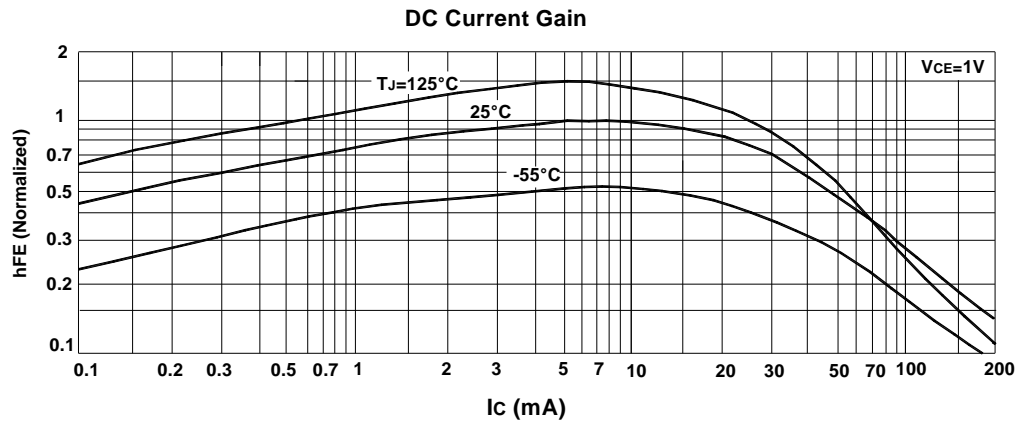

**SEMTECH ELECTRONICS LTD.**



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT](#) category:*

*Click to view products by [Semtech](#) manufacturer:*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC4731T-AY](#) [FJPF5304DTU](#)  
[2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SB1324-TD-E](#) [2SC2412KT146S](#) [2SC3332T](#) [2SC3902S](#) [2SC5231C8-TL-E](#) [2SD1685F](#) [CPH6501-TL-E](#)  
[MCH4021-TL-E](#) [MJE340](#) [Jantx2N5416](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#)  
[UMX21NTR](#) [MCH6102-TL-E](#) [NJL0302DG](#) [TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#)