


FV1043

Tuner AFC diode

The FV1043 is a variable capacitor diode intended for AFC applications, VHF TV applications, FM Receivers. Air craft communications gear, and other receivers in the 1 MHz to 500 MHz.

Standard package is DO-35 case, DO-34 case is available upon request.

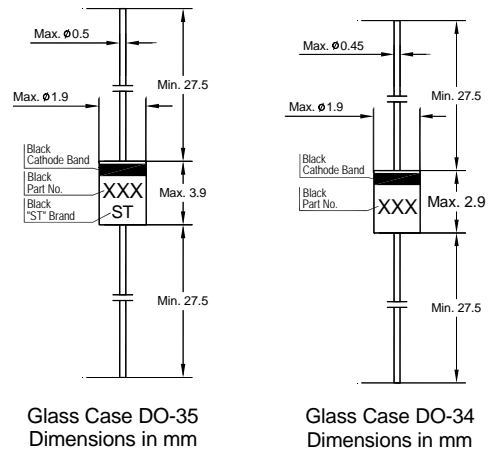


Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Breakdown Voltage	V_{BR}	5	V
Average Forward Current	$I_{F(AV)}$	250	mA
Power Dissipation	P_{tot}	350	mW
Operating Temperature Range	T_{opr}	- 65 to + 175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 200	$^\circ\text{C}$

Characteristics at $T_a = 25\text{ }^\circ\text{C}$ unless otherwise noted


Parameter	Symbol	Min.	Typ.	Max.	Unit
Breakdown Voltage at $I_R = 1\text{ }\mu\text{A}$	V_{BR}	5	-	-	V
Nominal Capacitance at $V_R = 4\text{ V}$, $f = 1\text{ MHz}$	C	5	-	20	pF
Capacitance Ratio at $V_R = 0.1\text{ V}$, $f = 1\text{ MHz}$ (C0.1) at $V_R = 4\text{ V}$, $f = 1\text{ MHz}$ (C4)	$\frac{C_{0.1}}{C_4}$	-	1.8	-	-
at $f = 100\text{ MHz}$	Q	100	-	-	-





**FIGURE OF MERIT
VERSUS FREQUENCY**

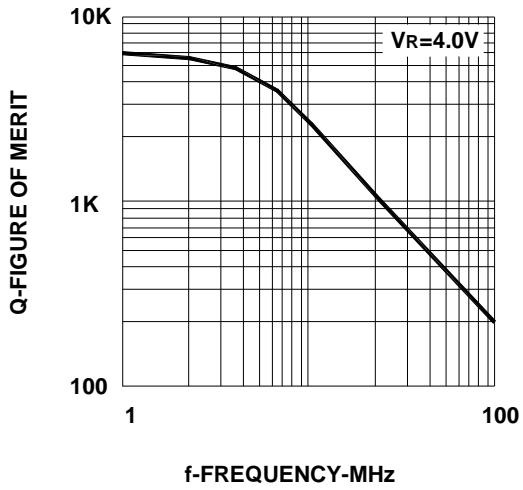

**FIGURE OF MERIT
VERSUS REVERSE VOLTAGE**

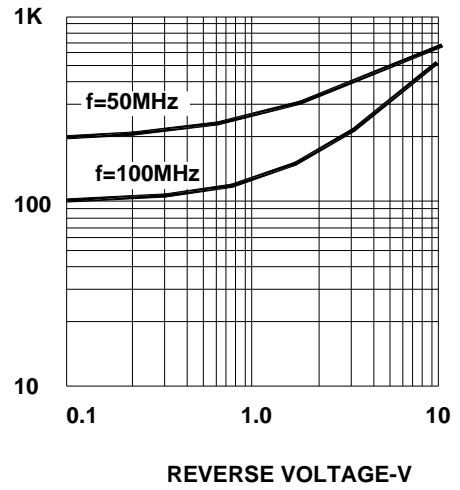

**CAPACITANCE VERSUS
REVERSE VOLTAGE**

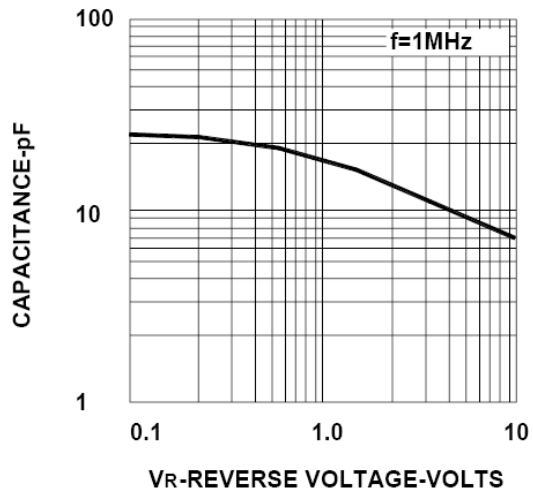

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Varactor Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[MA46H201-1056](#) [MAVR-001330-12790T](#) [MVAM108](#) [SVC704-TL-E](#) [SVC710-TL-E](#) [MAVR-000083-0287AT](#) [MAVR-044769-12790T](#)
[MA46H204-1056](#) [MA46H202-1088](#) [MA46H202-1056](#) [MA46H203-1088](#) [MA46H203-1056](#) [1SV239\(TPH3,F\)](#) [GC2510-17](#) [MAVR-044769-02870T](#) [MAVR-001350-12790T](#) [SMVA1248-079LF](#) [MAVR-000120-14110P](#) [MAVR-000409-0287FT](#) [GC15006-152](#) [MA46603-276](#)
[SMVA1253-079LF](#) [MSV34-075-C11](#) [MAVR-000120-12030P](#) [MAVR-000404-0287FT](#) [BB669E7904](#) [BB555H7912](#) [BB659CH7912](#)
[BB804SF2E6327](#) [BB172X](#) [BB535E7904HTSA1](#) [BBY5303WE6327HTSA1](#) [BBY5802VH6327XTSA1](#) [BBY6602VH6327XTSA1](#)
[1SV270\(TPH3,F\)](#) [1SV305,L3F](#) [1SV279\(TPH3,F\)](#) [1SV270TPH3F](#) [1SV281\(TPH3,F\)](#) [BB814E6327GR1HTSA1](#) [BBY5302VH6327XTSA1](#)
[BBY5502VH6327XTSA1](#) [BB535E7904XT](#) [BB639E7904HTSA1](#) [BB640E6327HTSA1](#) [BB837E6327HTSA1](#) [BBY40.215](#) [1SV280\(TPH3,F\)](#)
[1SV285\(TPH3,F\)](#) [1SV277TPH3F](#)