MMBD7000

Silicon Epitaxial Planar Switching Diode

Features

- Fast switching speed
- High Conductance

Applications

For general purpose switching

Absolute Maximum Ratings (T_a = 25 °C)

Parameter		Symbol	Value	Unit
Repetitive Peak Reverse Voltage		V _{RRM}	100	V
Reverse Voltage			100	V
Forward Current		I _F	200	mA
Non-repetitive Peak Forward Surge Current	at t = 1 s at t = 1 µs	I _{FSM}	1 2	А
Power Dissipation		P _d	350	mW
Junction and Storage Temperature Range		T _j , T _{stg}	- 65 to + 150	°C

Characteristics at T_a = 25 °C


Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at I _R = 100 μA	V _{(BR)R}	100	-	V
Forward Voltage at $I_F = 1 \text{ mA}$ at $I_F = 10 \text{ mA}$ at $I_F = 100 \text{ mA}$ at $I_F = 150 \text{ mA}$	V _F	0.55 0.67 0.75 -	0.7 0.82 1.1 1.25	V
Reverse Current at $V_R = 50 V$ at $V_R = 100 V$ at $V_R = 50 V$, $T_j = 125 °C$	I _R	- -	1 3 100	μΑ
Total Capacitance at V _R = 0 V, f = 1 MHz	CT	-	2	pF
Reverse Recovery Time at I _F = I _R = 10 mA, I _{rr} = 0.1 X I _R , R _L = 100 Ω	t _{rr}	-	4	ns





SEMTECH ELECTRONICS LTD.




Dated : 16/03/2015 Rev:01





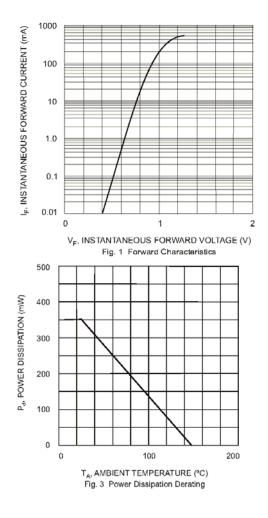

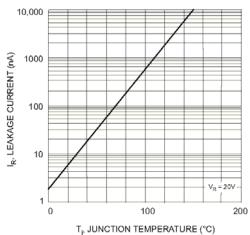





SEMTECH ELECTRONICS LTD.



Dated : 16/03/2015 Rev:01

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Semtech manufacturer:

Other Similar products are found below :

MMBD3004S-13-F RD0306T-H DSE010-TR-E BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 BAV199E6433HTMA1 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G RGP30D-E3/73 BAV99TQ-13-F BAS21DWA-7 NTE6250 NTE582-4 NTE582-6 MMDB30-E28X VS-HFA04SD60SL-M3