
Surface Mount Schottky Barrier Diodes

Features

Low Forward Voltage

PINNING

| PIN | DESCRIPTION | | |
|-----|-------------|--|--|
| 1 | Cathode | | |
| 2 | Anode | | |



Absolute Maximum Ratings (T₂ = 25 °C)

| Parameter | | Symbol | Value | Unit |
|--|-------------------------------|--------------------|----------------|------|
| Peak Repetitive Reverse Voltage | SD103AW SD103BW | V_{RRM} | 40 30 | V |
| | SD103CW | | 20 | |
| Reverse Voltage | SD103AW SD103BW SD103CW | V_{R} | 40 30 20 | V |
| Average Forward Rectified Current | | I _{F(AV)} | 350 | mA |
| Non-Repetitive Peak Forward Surge Current at t = | = 1 s | I _{FSM} | 2 | Α |
| Power Dissipation | | P _{tot} | 400 | mW |
| Operating and Storage Temperature Range | | T_{j},T_{stg} | - 65 to + 125 | °C |

Characteristics at Ta = 25 °C


| Parameter | | Symbol | Min. | Тур. | Max. | Unit |
|--|--------|-----------------|------|-----------|------|------|
| Reverse Breakdown Voltage | | | | | | |
| | D103AW | \/ | 40 | - | - | V |
| SI | D103BW | $V_{(BR)R}$ | 30 | - | - | V |
| SI | D103CW | | 20 | - | - | |
| Reverse Leakage Current | | | | | | |
| at $V_R = 30 \text{ V}$ SI | D103AW | I _R | - | - | 5 | μА |
| at $V_R = 20 \text{ V}$ | D103BW | | - | - | 5 | |
| at $V_R = 10 \text{ V}$ SI | D103CW | | - | - | 5 | |
| Forward Voltage | | | | | | |
| at I _F = 20 mA | | V_{F} | - | - | 0.37 | V |
| at I _F = 200 mA | | | - | ı | 0.6 | |
| Total Capacitance | | 0 | | 50 | | |
| at $V_R = 0$ V, $f = 1$ MHz | | Ст | - | 50 | - | pF |
| Reverse Recovery Time at $I_F = I_R = 200$ mA, $I_{rr} = 0.1$ I_R , $R_L = 100$ Ω | | t _{rr} | - | 10 | - | ns |









Dated: 04/11/2009









V_F, INSTANTANEOUS FORWARD VOLTAGE (mV) Fig. 2 Typical Forward Characteristics





Fig. 4 Typ. Total Capacitance vs. Reverse Voltage



ACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

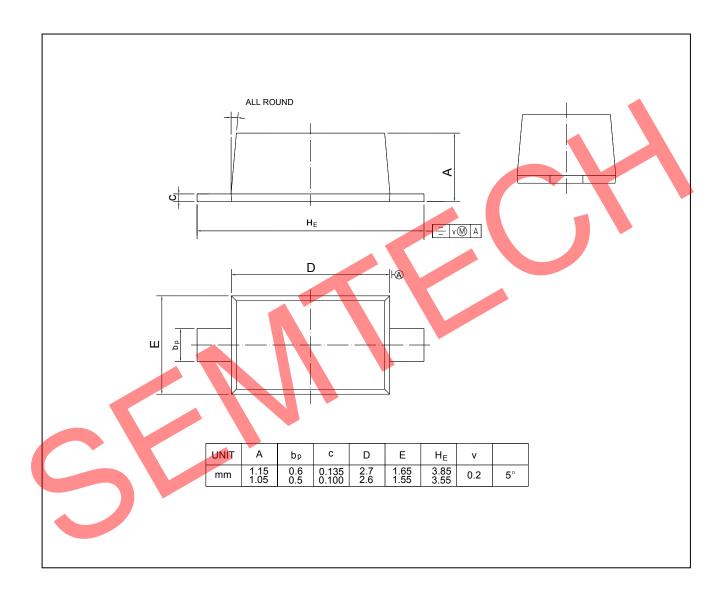



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Semtech manufacturer:

Other Similar products are found below:

MA4E2039 MA4E2508M-1112 MBR10100CT-BP MBR1545CT MMBD301M3T5G GS1JE-TP RB160M-50TR BAS 3010S-02LRH E6327
BAT 54-02LRH E6327 NSR05F40QNXT5G NSVR05F40NXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W
SBAT54CWT1G SBM30-03-TR-E SK310-T SK33A-TP SK34B-TP SS3003CH-TL-E PDS3100Q-7 GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G BAS 70-02L E6327 DMJ3940-000 SB007-03C-TB-E SB10015M-TL-E SB1003M3-TL-E SK32A-TP SK33B-TP SK35A-TP SK38B-LTP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G VS-6CWQ10FNHM3
CRG04(T5L,TEMQ) ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA240-HF ACDBA3100-HF
CDBQC0530L-HF BAT54-13-F ACDBA340-HF