

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>**HIGH DENSITY, HIGH VOLTAGE, STANDARD
RECOVERY RECTIFIER ASSEMBLY**


- 2.5A forward current
- Low reverse leakage current
- Corona free design
- Easy aluminum base mount
- Low forward voltage drop

**QUICK
REFERENCE DATA**

- $V_R = 5\text{kV} \& 10\text{kV}$
- $I_F = 2.5\text{A}$
- $t_{rr} = 2.0\mu\text{s}$
- $I_R = 1.0\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS

	Symbol	SDH5KS	SDH10KS	Unit
Working reverse voltage	V_{RWM}	5.0	10.0	kV
Surge reverse voltage	V_{RSM}	5.5	11.0	kV
Average forward current in air @ 25°C in oil @ 55°C	$I_{F(AV)}$	2.5 2.5	2.5 2.5	A A
Non-repetitive surge current $t_p = 8.3\text{mS}, @ 25^\circ\text{C}$	I_{FSM}	150	150	A
Storage temperature range	TSTG	-55 to +150	-55 to +150	°C
Operating temperature range	TOP	-55 to +150	-55 to +150	°C
Body length $\pm 0.030"$	dim C	3.36	4.04	inches

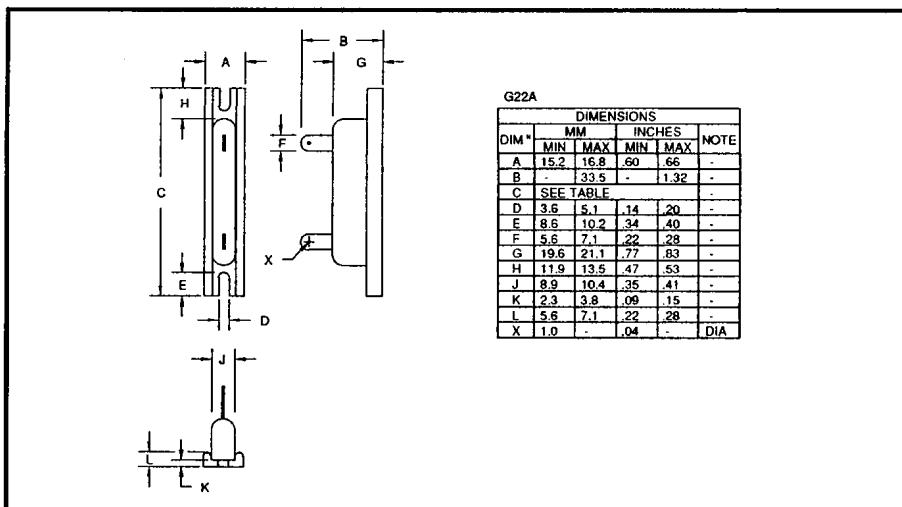
MECHANICAL

January 9, 1998

ELECTRICAL CHARACTERISTICS

	Symbol	SDH5KS	SDH10KS	Unit
Max. forward voltage drop @ $I_F = 3.0A$, $T_j = 25^\circ C$	V_F	6.0	12.0	V
Max. reverse leakage current @ V_{RWM} , $T_j = 25^\circ C$	I_R	1.0		μA
@ V_{RWM} , $T_j = 100^\circ C$	I_R	20		μA
Max. reverse recovery time ¹ 0.5A I_F to 1.0A I_R . Recover to 0.25A I_{RR} .	t_{rr}	2.0		μS
Max. fusing current $t_p = 8.3mS$	I^2t	94		A^2S

¹ Measured on discrete devices prior to assembly

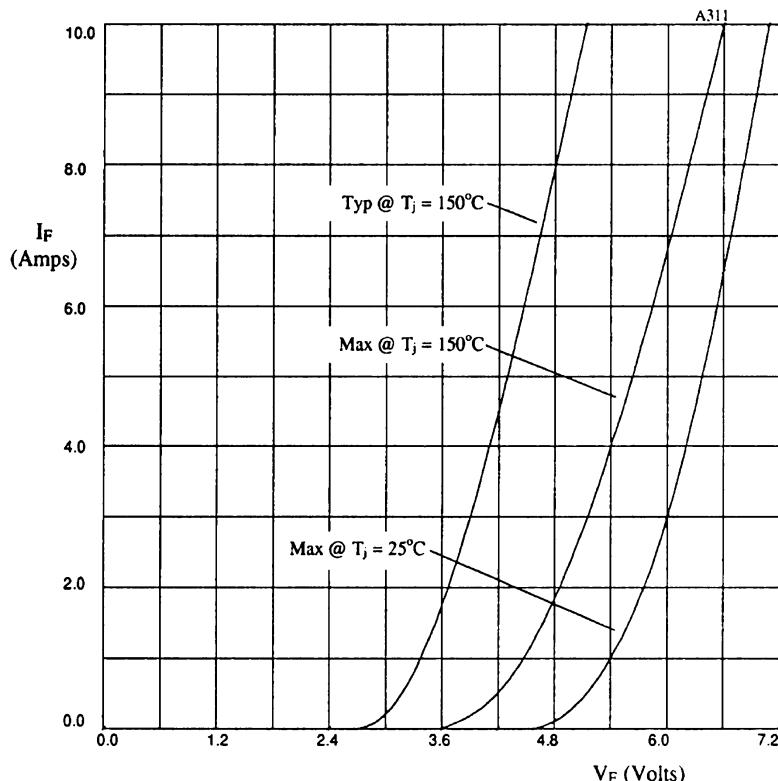

Multiplication tables for fig 1.

SDH5KS	X-axis x1
SDH10KS	X-axis x2

Fig 1. Forward voltage drop as a function of forward current for use with multiplication table 1.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by Semtech manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)
[JANS1N6640US](#) [VS-80-1293](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [DSP10G-TR-E](#) [RRE02VS6SGTR](#) [067907F](#) [MS306](#) [ND104N08K](#)
[SPA2003-B-D-A01](#) [VS-80-6193](#) [VS-66-9903](#) [VGF0136AB](#) [US2JFL-TP](#) [UFS105Je3/TR13](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#)
[GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [STTH20P035FP](#) [VS-8EWS12S-M3](#) [VS-12FL100S10](#) [ACGRA4001-HF](#)