

DATA SHEET

6.0A BRIDGE RECTIFIER

VOLTAGE 1000 Volts

CURRENT 6.0Amperes

GBL


Unit:inch/mm

FEATURES

- Low Forward Voltage.
- Low reverse leakage
- High forward surge capability
- Surge overload rating: 150 Amperes peak

MECHANICAL DATA

- Case: Molded Plastic
- Polarity: Symbols molded or marked on body
- Mounting position : Any

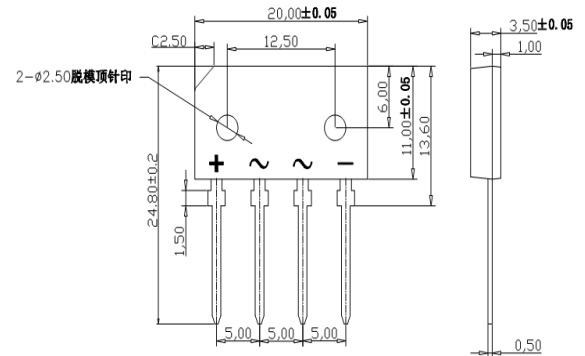

In compliance with EU RoHs 2002/95/EC directives

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Characteristic	Symbol	GBL610	Unit
Peak Repetitive Reverse Voltage	VRRM		
Working Peak Reverse Voltage	VRWM	1000	V
DC Blocking Voltage	VR		
Maximum RMS Voltage	VRMS	700	V
Maximum Average Forward Rectified Current	I(AV)	6	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	IFSM	150	A
Maximum forward voltage	VF	1.0	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	10	uA
Operating Temperature Range	TJ	-55to+150	°C
Storage Temperature Range	TSTG	-55to+150	°C
Typical thermal resistance	R θ JA	22	°C/W
Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz)	Cj	80	PF

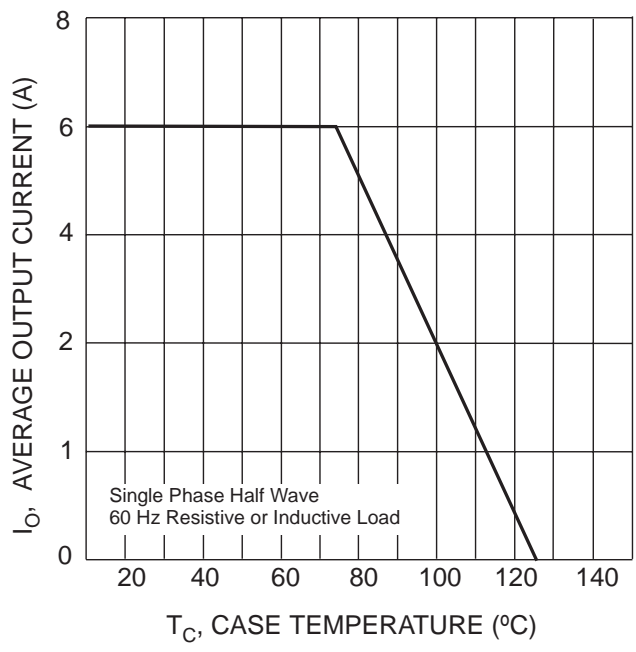


Fig. 1 Forward Current Derating Curve

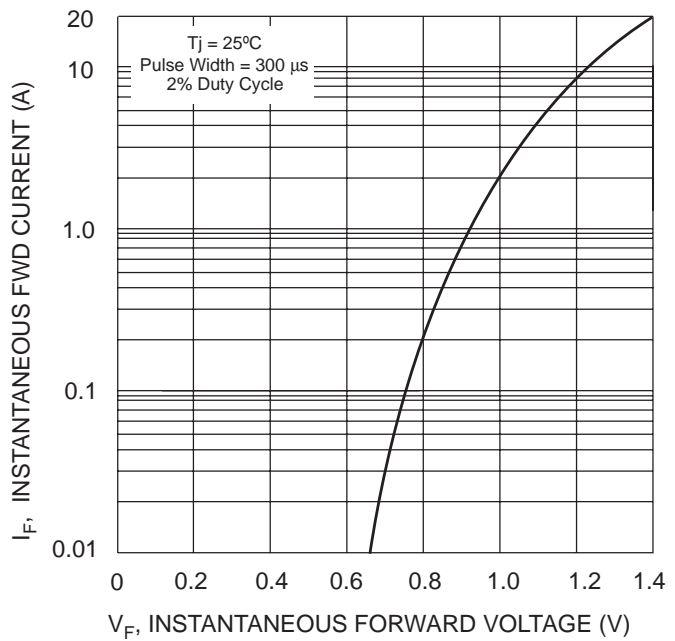


Fig. 2 Typical Forward Characteristics, per element

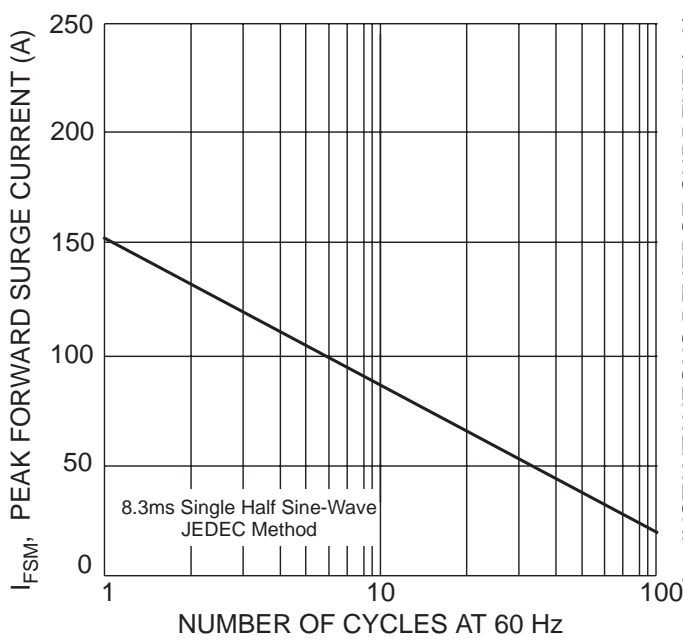


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

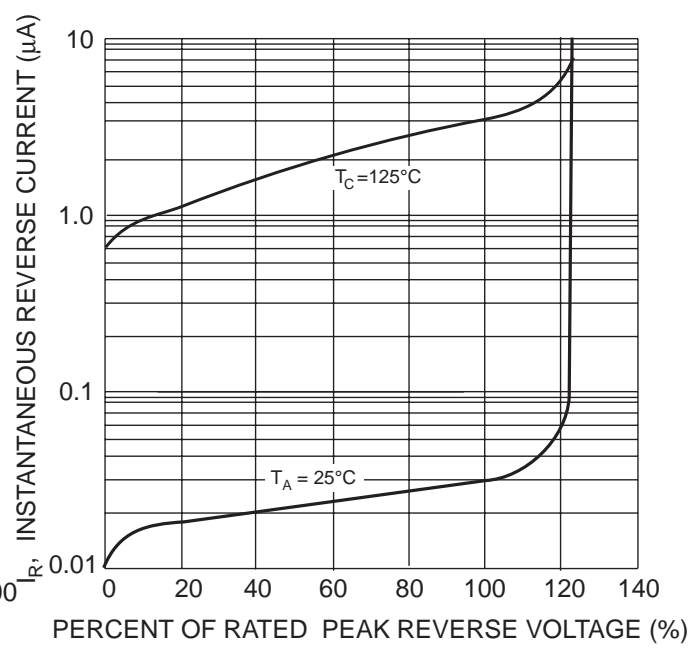


Fig. 4 Typical Reverse Characteristics, per element

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [SEP](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#)
[GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA40G](#) [DBF250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-](#)
[10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#)
[MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#)
[BU1508-E3/51](#) [BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-2KBB60](#) [VS-60MT120KPBF](#)