


● Features

- World standard miniature package.
- Low $V_{CE(sat)}$: $V_{CE(sat)} = -0.2V$ at 1A

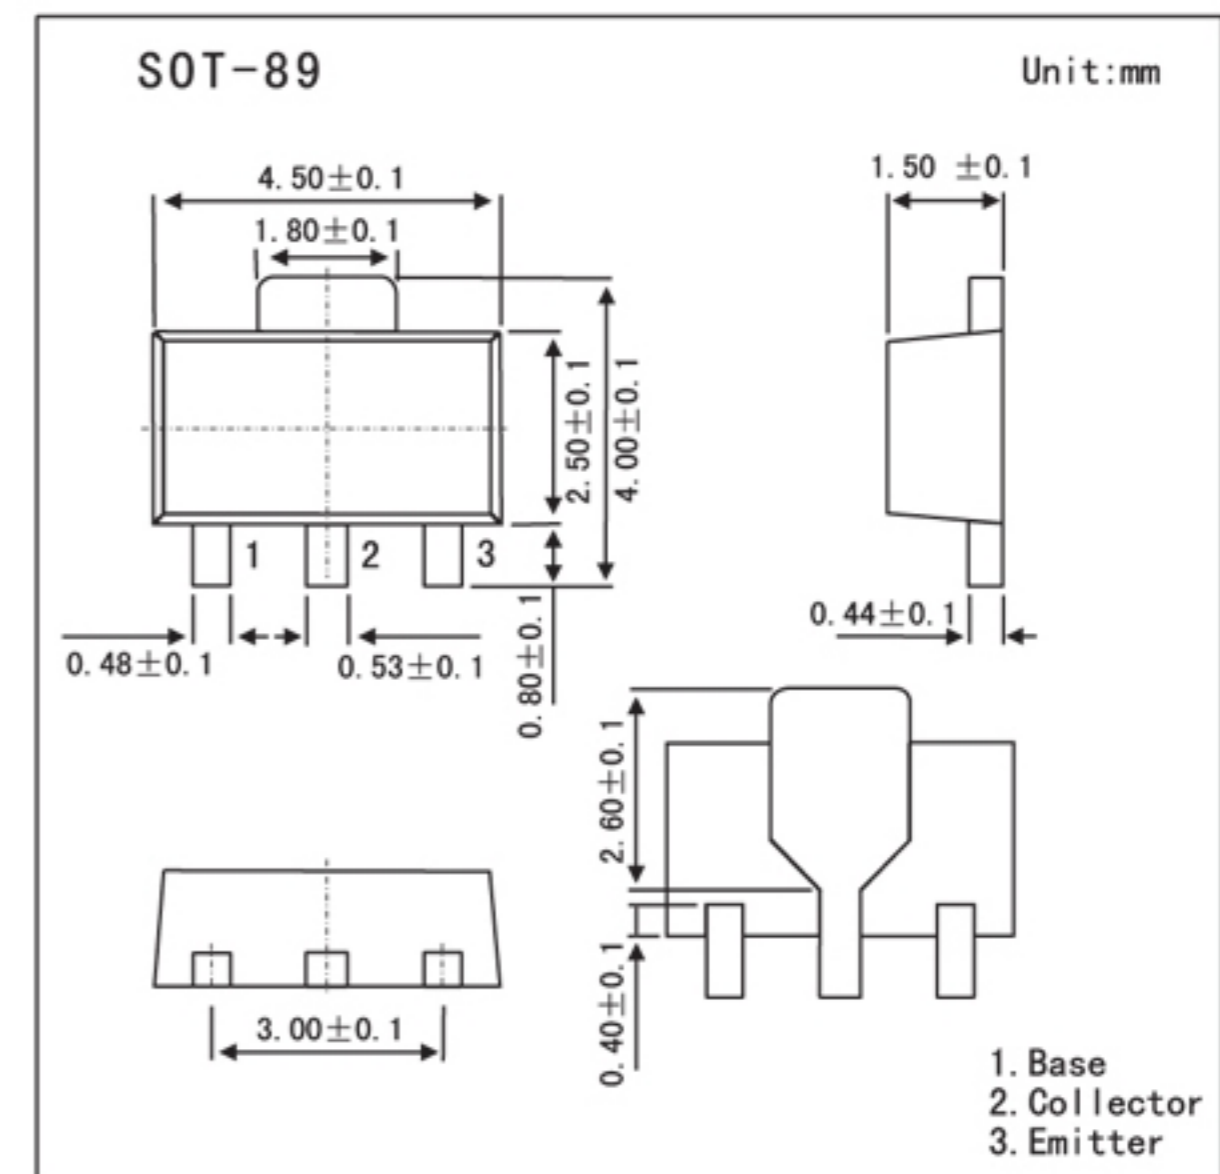

● Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector to base voltage	V_{CB0}	-60	V
Collector to emitter voltage	V_{CE0}	-50	V
Emitter to base voltage	V_{EB0}	-6	V
Collector current	I_C	-1	A
Collector current (pulse) *	I_C	-2	A
Total power dissipation	P_T	2	W
Junction temperature	T_j	150	$^\circ C$
Storage temperature range	T_{stg}	-55 to +150	$^\circ C$

* Pulsed: $PW \leq 10$ ms, duty cycle $\leq 50\%$

● Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	I_{CB0}	$V_{CB} = -60$ V, $I_E = 0$			-100	nA
Emitter cutoff current	I_{EB0}	$V_{EB} = -6.0$ V, $I_C = 0$			-100	nA
DC current gain *	hFE	$V_{CE} = -2.0$ V, $I_C = -100$ mA	135	340	600	
		$V_{CE} = -2.0$ V, $I_C = -1.0$ A	100	200		
Collector saturation voltage *	$V_{CE(sat)}$	$I_C = -1.0$ A, $I_B = -50$ mA		-0.2	-0.3	V
Base saturation voltage *	$V_{BE(sat)}$	$I_C = -1.0$ A, $I_B = -50$ mA		-0.9	-1.2	V
Base-emitter voltage *	V_{BE}	$V_{CE} = -2.0$ V, $I_C = -50$ mA	-600		-700	V
Gain bandwidth product	f_T	$V_{CE} = -2.0$ V, $I_E = -100$ mA	80	120		MHz
Output capacitance	C_{ob}	$V_{CB} = -10$ V, $I_E = 0$, $f = 1.0$ MHz		25		pF

* Pulsed: $PW \leq 350$ μs , duty cycle $\leq 2\%$

● hFE Classification

Marking	YM	YL	YK
hFE	135~270	200~400	300~600

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Shikues manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)